
MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE, MOMENTARY, 6 CIRCUIT OR 3PDT, UNSEALED

The complete requirements for procuring the switches described herein shall consist of this document and the issue in effect of Specification MIL-S-8805

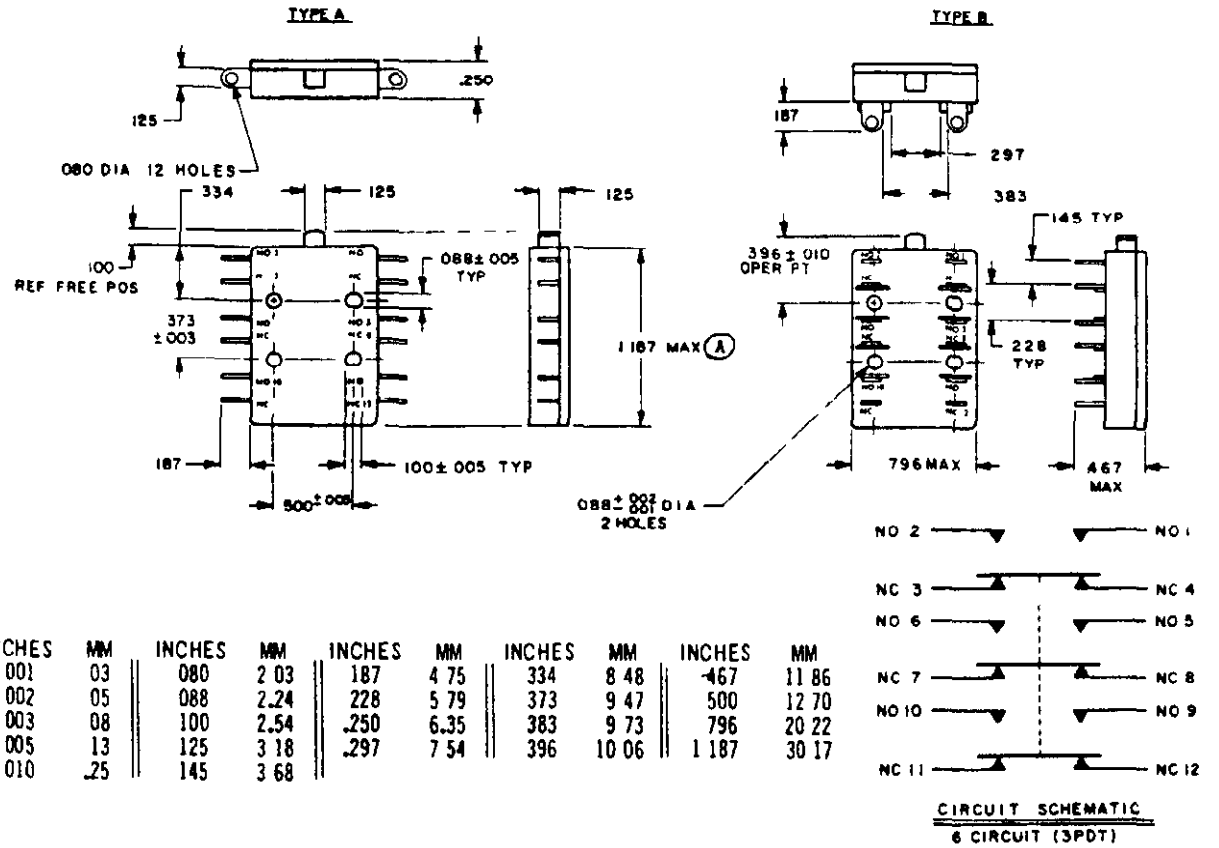

CIRCUIT SCHEMATIC
6 CIRCUIT (3PDT)

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.080	2.03	.187	4.75	.334	8.48	.467	11.86
.002	.05	.088	2.24	.228	5.79	.373	9.47	.500	12.70
.003	.08	.100	2.54	.250	6.35	.383	9.73	.796	20.22
.005	.13	.125	3.18	.297	7.54	.396	10.06	1.187	30.17
.010	.25	.145	3.68						

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is ± .015
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm

(A) For changes see pages 1 and 2

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration	See figure	
Enclosure design	1(Unsealed)	
Temperature characteristic	2(-65° to +125° C)	
Shock type	M(50G)	
Vibration grade	2(10 to 2,000 cps).	
Weight	36 ounce maximum	
Operating characteristics		
Actuating force	1 5 pounds maximum	±20 percent variation from specified values acceptable after test
Pretravel	060 inch maximum	
Overtravel	012 inch minimum	
Movement differential	025 ± 010 inch	
Strength of actuator	25 pounds	
Terminal strength	5 pounds when applied perpendicular to long axis of terminal, 9 pounds when applied in other directions	
Material Case, cover and button	Type SDGF in accordance with MIL-M-14	
Dielectric withstanding voltage		
Sea level	1,000 vrms initial	
	Ⓐ 1,000 vrms between all terminals and mounting plate after endurance	
Altitude	70,000 ft - 400 vrms, initial.	
Mechanical endurance	100,000 cycles at 016 ± 001 inch overtravel	
Electrical endurance	50,000 cycles	
Electrical ratings	See table I	

TABLE I Electrical ratings

Load		Sea level			70,000 feet	
	28 VDC 3PDT	28 VDC 6 Circuit	115 VAC, 60 cps 3PDT	115 VAC, 60 cps 6 Circuit	28 VDC 3PDT	28 VDC 6 Circuit
	amperes	amperes	amperes	amperes	amperes	amperes
Resistive - - -	10	10	7 5	5	10	10
Inductive - - -	7 5	5	5	5	3 5	2
Lamp- - - - - -	4	3	3	1 5	---	---

Qualification

Group submission	See table II

Ⓐ For changes see pages 1 and 2

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:16Z
Check the source to verify that this is the current version before use.

TABLE II

Examination or test	Basic switch	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805, groups I through VIII, inclusive	M8805/78-001 (all sample units)	M8805/78-002 (2 sample units) 1 Terminal strength 2 Thermal shock 3 Operating characteristics 4 Visual and mechanical examination	All

Part number	Terminal configuration
M8805/78-001 M8805/78-002	A (End-solder type) B (Side-solder type)

Custodians
Army - EL
Navy - SH
Air Force - 11

Review activities
Army - EL, MU
Navy - SH, WP
Air Force - 11, 17, 85

User activities
Army -
Navy - MC
Air Force - 14, 19

Preparing activity
Navy - SH

(Project 5930-0483-28)

A For changes see pages 1 and 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:16Z
Check the source to verify that this is the current version before use.