
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, MICA DIELECTRIC,

STYLE CM35

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-5.

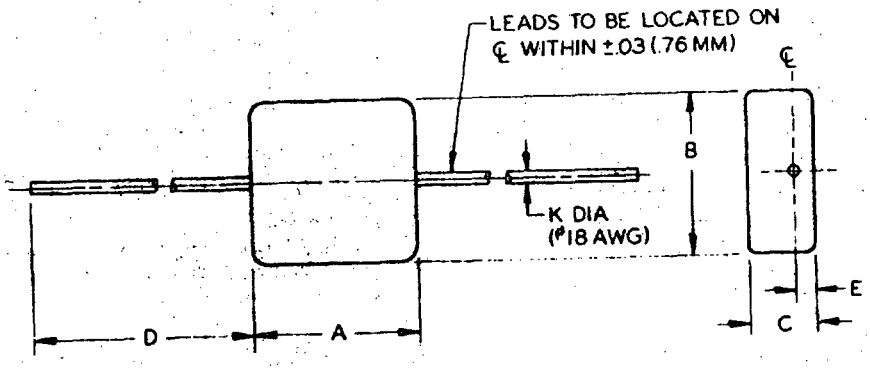

DIM	DIMENSIONS					
	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	.77	.80	.86	19.56	20.32	21.84
B	.77	.80	.86	19.56	20.32	21.84
C	.28	.31	.36	7.11	7.87	9.14
D	1.12	---	---	28.45	---	---
E	.08	---	---	2.03	---	---
K	.038	.040	.042	.97	1.02	1.07

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Approximate weight .25 ounce.
4. Unless otherwise specified, tolerance is .xx ±.02.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Symbol	Capacitance tolerance
F	±1 percent
G	±2 percent
J	±5 percent

DC rated voltage: See table I.

Operating temperature range: See table I.

Symbol	Temperature range
N	-55°C to +85°C
O	-55°C to +125°C
P	-55°C to +150°C

Vibration grade: 3 (10 to 2,000 cps).

Characteristic: See table I.

Symbol	Temperature coefficient P/M/°C	Capacitance drift
C	-200 to +200	±(0.5 percent +0.1 pf)
E	-20 to +100	±(0.1 percent +0.1 pf)
F	0 to +70	±(0.05 percent +0.1 pf)

Dielectric withstanding voltage:
Method 301 of MIL-STD-202:
200 percent of rated dc voltage for not less than 1 second, nor more than 5 seconds.

Barometric pressure:
Method 105 of MIL-STD-202: Condition D (100,000 ft).
Test potential - 150 percent of rated dc voltage for not less than 1 second nor more than 5 seconds.

Insulation resistance:
Method 302 of MIL-STD-202, condition A.
At 25° C.
3600 to 10,000 pf - 100,000 megohms, minimum
11,000 to 15,000 pf - 1000 megohm microfarads, min.
At 85° C.
3600 to 4700 pf - 15,000 megohms, minimum
5100 to 15,000 pf - 75 megohm microfarads, min.
At 125° C. - 33 megohm microfarads, minimum
At 150° C. - 7.5 megohm microfarads, minimum

Dissipation factor, maximum: See MIL-C-5.

Capacitance:
Method 305 of MIL-STD-202.

Vibration:
Method 204 of MIL-STD-202, Condition D.

Temperature cycling:
Method 102 of MIL-STD-202, condition D, except that the high temperature shall be as follows:
Symbol O - +125°C.
Symbol P - +150°C.

Immersion cycling:
Method 104 of MIL-STD-202, condition B.
Dielectric withstanding voltage - Meet initial requirement.
Insulation resistance - At least 30 percent of initial requirement.
Dissipation factor - Not greater than 150 percent of initial requirement.
Capacitance change - Shall not exceed ±2 percent of nominal value or 1 pf, whichever is greater.

Shock (medium impact):
Method 205 of MIL-STD-202, condition C (50G).

Solderability:
Method 208 of MIL-STD-202.

Terminal strength:
Pull test - Capacitor held by one terminal and 5 pound load gradually applied to other terminal and maintained for at least 5 seconds.
Twist test - 5 alternate 360° rotations.

Moisture resistance:
Method 106 of MIL-STD-202.
Dielectric withstanding voltage - Initial requirement.
Insulation resistance - At least 30 percent of initial requirement.
Dissipation factor - Not greater than 150 percent of initial requirement.
Capacitance change - Shall not exceed ±2 percent of nominal value or 1 pf, whichever is greater.

Temperature coefficient and capacitance drift:
Within the limits specified for the applicable characteristic.

Low temperature storage and life:
48 hours at -55 +0 -3 °C, immediately followed by qualification or performance test, as applicable.
Qualification test - 2,000 hours at applicable high test temperature with 150 percent of rated dc working voltage applied.
Dielectric withstanding voltage - Initial requirement.
Insulation resistance - Initial requirement.
Dissipation factor - Not greater than 150 percent of initial requirement.
Capacitance change - Shall not exceed ±2 percent of nominal value or 1 pf, whichever is greater.
Performance check - Conditions and requirements in accordance with qualification test except test duration shall be 250 hours.
Continuation test - Units that have completed the 250 hour performance shall be continued for an additional 1750 hours and meet the requirements for the qualification test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:49Z
Check the source to verify that this is the current version before use.

TABLE I. Style CM35.

Type designation 1/	Capacitance (pf)	DC working voltage (volts)	Operating temperature range	Characteristics available for capacitance tolerances		
				±1% (F)	±2% (G)	±5% (J)
CM35-D362--3	3,600	500	N, O, P	CEF	CEF	CEF
CM35-D392--3	3,900	500	N, O, P	CEF	CEF	CEF
CM35-D432--3	4,300	500	N, O, P	CEF	CEF	CEF
CM35-D472--3	4,700	500	N, O, P	CEF	CEF	CEF
CM35-D512--3	5,100	500	N, O, P	CEF	CEF	CEF
CM35-D562--3	5,600	500	N, O, P	CEF	CEF	CEF
CM35-D622--3	6,200	500	N, O, P	CEF	CEF	CEF
CM35-D682--3	6,800	500	N, O, P	CEF	CEF	CEF
CM35-D752--3	7,500	500	N, O, P	CEF	CEF	CEF
CM35-D822--3	8,200	500	N, O, P	CEF	CEF	CEF
CM35-C912--3	9,100	300	N, O, P	CEF	CEF	CEF
CM35-C103--3	10,000	300	N, O, P	CEF	CEF	CEF
CM35-C113--3	11,000	300	N, O	CEF	CEF	CEF
CM35-C123--3	12,000	300	N, O	CEF	CEF	CEF
CM35-C133--3	13,000	300	N, O	CEF	CEF	CEF
CM35-C153--3	15,000	300	N, O	CEF	CEF	CEF

1/ Complete type designation will include additional symbols to indicate characteristic, capacitance tolerance and temperature range.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:49Z
Check the source to verify that this is the current version before use.

Qualification inspection: Qualification inspection (Group A) is required.

Supersession data: Capacitors with voltage ratings of 1,000 volts and greater, formerly covered by this specification sheet with part numbers M5/04-0361 thru -0639, are no longer authorized. Since there has never been a qualified source for these items, no replacement data is offered. For capacitors with voltage ratings of 500 volts and less, see table II for replacement data.

TABLE II. Part number to replacement type designation.

Dash No.	Replacement item	Dash No.	Replacement item	Dash No.	Replacement item
0001	CM35CD682FN3	0052	CM35CD752GP3	0103	CM35CC912JO3
0002	CM35CD682GN3	0053	CM35CD752JP3	0104	CM35EC912FO3
0003	CM35CD682JN3	0054	CM35ED752FP3	0105	CM35EC912GO3
0004	CM35ED682FN3	0055	CM35ED752GP3	0106	CM35EC912JO3
0005	CM35ED682GN3	0056	CM35ED752JP3	0107	CM35FC912FO3
0006	CM35ED682JN3	0057	CM35FD752FP3	0108	CM35FC912GO3
0007	CM35FD682FN3	0058	CM35FD752GP3	0109	CM35FC912JO3
0008	CM35FD682GN3	0059	CM35FD752JP3	0111	CM35CC912FP3
0009	CM35FD682JN3	0061	CM35CD822FN3	0112	CM35CC912GP3
0011	CM35CD682FO3	0062	CM35CD822GN3	0113	CM35CC912JP3
0012	CM35CD682GO3	0063	CM35CD822JN3	0114	CM35EC912FP3
0013	CM35CD682JO3	0064	CM35ED822FN3	0115	CM35EC912GP3
0014	CM35ED682FO3	0065	CM35ED822GN3	0116	CM35EC912JP3
0015	CM35ED682GO3	0066	CM35ED822JN3	0117	CM35FC912FP3
0016	CM35ED682JO3	0067	CM35FD822FN3	0118	CM35FC912GP3
0017	CM35FD682FO3	0068	CM35FD822GN3	0119	CM35FC912JP3
0018	CM35FD682GO3	0069	CM35FD822JN3	0121	CM35CC103FN3
0019	CM35FD682JO3	0071	CM35CD822FO3	0122	CM35CC103GN3
0021	CM35CD682FP3	0072	CM35CD822GO3	0123	CM35CC103JN3
0022	CM35CD682GP3	0073	CM35CD822JO3	0124	CM35EC103FN3
0023	CM35CD682JP3	0074	CM35ED822FO3	0125	CM35EC103GN3
0024	CM35ED682FP3	0075	CM35ED822GO3	0126	CM35EC103JN3
0025	CM35ED682GP3	0076	CM35ED822JO3	0127	CM35FC103FN3
0026	CM35ED682JP3	0077	CM35FD822FO3	0128	CM35FC103GN3
0027	CM35FD682FP3	0078	CM35FD822GO3	0129	CM35FC103JN3
0028	CM35FD682GP3	0079	CM35FD822JO3	0131	CM35CC103FO3
0029	CM35FD682JP3	0081	CM35CD822FP3	0132	CM35CC103GO3
0031	CM35CD752FN3	0082	CM35CD822GP3	0133	CM35CC103JO3
0032	CM35CD752GN3	0083	CM35CD822JP3	0134	CM35EC103FO3
0033	CM35CD752JN3	0084	CM35ED822FP3	0135	CM35EC103GO3
0034	CM35ED752FN3	0085	CM35ED822GP3	0136	CM35EC103JO3
0035	CM35ED752GN3	0086	CM35ED822JP3	0137	CM35FC103FO3
0036	CM35ED752JN3	0087	CM35FD822FP3	0138	CM35FC103GO3
0037	CM35FD752FN3	0088	CM35FD822GP3	0139	CM35FC103JO3
0038	CM35FD752GN3	0089	CM35FD822JP3	0141	CM35CC103FP3
0039	CM35FD752JN3	0091	CM35CC912FN3	0142	CM35CC103GP3
0041	CM35CD752FO3	0092	CM35CC912GN3	0143	CM35CC103JP3
0042	CM35CD752GO3	0093	CM35CC912JN3	0144	CM35EC103FP3
0043	CM35CD752JO3	0094	CM35EC912FN3	0145	CM35EC103GP3
0044	CM35ED752FO3	0095	CM35EC912GN3	0146	CM35EC103JP3
0045	CM35ED752GO3	0096	CM35EC912JN3	0147	CM35FC103FP3
0046	CM35ED752JO3	0097	CM35FC912FN3	0148	CM35FC103GP3
0047	CM35FD752FO3	0098	CM35FC912GN3	0149	CM35FC103JP3
0048	CM35FD752GO3	0099	CM35FC912JN3	0151	CM35CD362FN3
0049	CM35FD752JO3	0101	CM35CC912FO3	0152	CM35CD362GN3
0051	CM35CD752FP3	0102	CM35CC912GO3	0153	CM35CD362JN3

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:49Z
Check the source to verify that this is the current version before use.

TABLE II. Part number to replacement type designation - Continued

Dash No.	Replacement item	Dash No.	Replacement item	Dash No.	Replacement item
0154	CM35ED362FN3	0215	CM35ED432GN3	0276	CM35ED512JN3
0155	CM35ED362GN3	0216	CM35ED432JN3	0277	CM35FD512FN3
0156	CM35ED362JN3	0217	CM35FD432FN3	0278	CM35FD512GN3
0157	CM35FD362FN3	0218	CM35FD432GN3	0279	CM35FD512JN3
0158	CM35FD362GN3	0219	CM35FD432JN3	0281	CM35CD512FO3
0159	CM35FD362JN3	0221	CM35CD432FO3	0282	CM35CD512GO3
0161	CM35CD362FO3	0222	CM35CD432GO3	0283	CM35CD512JO3
0162	CM35CD362GO3	0223	CM35CD432JO3	0284	CM35ED512FO3
0163	CM35CD362JO3	0224	CM35ED432FO3	0285	CM35ED512GO3
0164	CM35ED362FO3	0225	CM35ED432GO3	0286	CM35ED512JP3
0165	CM35ED362GO3	0226	CM35ED432JO3	0287	CM35FD512FO3
0166	CM35ED362JO3	0227	CM35FD432FO3	0288	CM35FD512GO3
0167	CM35FD362FO3	0228	CM35FD432GO3	0289	CM35FD512JO3
0168	CM35FD362GO3	0229	CM35FD432JO3	0291	CM35CD512FP3
0169	CM35FD362JO3	0231	CM35CD432FP3	0292	CM35CD512GP3
0171	CM35CD362FP3	0232	CM35CD432GP3	0293	CM35CD512JP3
0172	CM35CD362GP3	0233	CM35CD432JP3	0294	CM35ED512FP3
0173	CM35CD362JP3	0234	CM35ED432FP3	0295	CM35ED512GP3
0174	CM35ED362FP3	0235	CM35ED432GP3	0296	CM35ED512JP3
0175	CM35ED362GP3	0236	CM35ED432JP3	0297	CM35FD512FP3
0176	CM35ED362JP3	0237	CM35FD432FP3	0298	CM35FD512GP3
0177	CM35FD362FP3	0238	CM35FD432GP3	0299	CM35FD512JP3
0178	CM35FD362GP3	0239	CM35FD432JP3	0301	CM35CD562FN3
0179	CM35FD362JP3	0241	CM35CD472FN3	0302	CM35CD562GN3
0181	CM35CD392FN3	0242	CM35CD472GN3	0303	CM35CD562JN3
0182	CM35CD392GN3	0243	CM35CD472JN3	0304	CM35ED562FN3
0183	CM35CD392JN3	0244	CM35ED472FN3	0305	CM35ED562GN3
0184	CM35ED392FN3	0245	CM35ED472GN3	0306	CM35ED562JN3
0185	CM35ED392GN3	0246	CM35ED472JN3	0307	CM35FD562FN3
0186	CM35ED392JN3	0247	CM35FD472FN3	0308	CM35FD562GN3
0187	CM35FD392FN3	0248	CM35FD472GN3	0309	CM35FD562JN3
0188	CM35FD392GN3	0249	CM35FD472JN3	0311	CM35CD562FO3
0189	CM35FD392JN3	0251	CM35CD472FO3	0312	CM35CD562GO3
0191	CM35CD392FO3	0252	CM35CD472GO3	0313	CM35CD562JO3
0192	CM35CD392GO3	0253	CM35CD472JO3	0314	CM35ED562FO3
0193	CM35CD392JO3	0254	CM35ED472FO3	0315	CM35ED562GO3
0194	CM35ED392FO3	0255	CM35ED472GO3	0316	CM35ED562JO3
0195	CM35ED392GO3	0256	CM35ED472JO3	0317	CM35FD562FO3
0196	CM35ED392JO3	0257	CM35FD472FO3	0318	CM35FD562GO3
0197	CM35FD392FO3	0258	CM35FD472GO3	0319	CM35FD562JO3
0198	CM35FD392GO3	0259	CM35FD472JO3	0321	CM35CD562FP3
0199	CM35FD392JO3	0261	CM35CD472FP3	0322	CM35CD562GP3
0201	CM35CD392FP3	0262	CM35CD472 GP3	0323	CM35CD562JP3
0202	CM35CD392GP3	0263	CM35CD472JP3	0324	CM35ED562FP3
0203	CM35CD392JP3	0264	CM35ED472FP3	0325	CM35ED562GP3
0204	CM35ED392FP3	0265	CM35ED472GP3	0326	CM35ED562JP3
0205	CM35ED392GP3	0266	CM35ED472JP3	0327	CM35FD562FP3
0206	CM35ED392JP3	0267	CM35FD472FP3	0328	CM35FD562GP3
0207	CM35FD392FP3	0268	CM35FD472GP3	0329	CM35FD562JP3
0208	CM35FD392GP3	0269	CM35FD472JP3	0331	CM35CD622FN3
0209	CM35FD392JP3	0271	CM35CD512FN3	0332	CM35CD622GN3
0211	CM35CD432FN3	0272	CM35CD512GN3	0333	CM35CD622JN3
0212	CM35CD432GN3	0273	CM35CD512JN3	0334	CM35ED622FN3
0213	CM35CD432JN3	0274	CM35ED512FN3	0335	CM35ED622GN3
0214	CM35ED432FN3	0275	CM35ED512GN3	0336	CM35ED622JN3

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:49Z
Check the source to verify that this is the current version before use.

TABLE II. Part number to replacement type designation (cont'd)

Dash No.	Replacement item	Dash No.	Replacement item	Dash No.	Replacement item
0337	CM35FD622FN3	0345	CM35ED622GO3	0353	CM35CD622JP3
0338	CM35FD622GN3	0346	CM35ED622JO3	0354	CM35ED622FP3
0339	CM35FD622JN3	0347	CM35FD622FO3	0355	CM35ED622GP3
0341	CM35CD622FO3	0348	CM35FD622GO3	0356	CM35ED622JP3
0342	CM35CD622GO3	0349	CM35FD622JO3	0357	CM35FD622FP3
0343	CM35CD622JO3	0351	CM35CD622FP3	0358	CM35FD622GP3
0344	CM35ED622FO3	0352	CM35CD622GP3	0359	CM35FD622JP3

Custodians:
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - EL
Navy - SH, AS, OS, EC
Air Force - 11, 17, 85

User activities:
Army -
Navy - MC, CG
Air Force - 14, 19

Preparing activity:
Navy - SH

(Project 5910-0749)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:49Z
Check the source to verify that this is the current version before use.