| INCH-POUND |

MIL-P-29183/15
18 June 1990

MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF,
TYPE 1, CLASS 1, CONFIGURATION 2: 208Y/120 VOLT, 15 KILOWATT

This specification is approved for use by all agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-P-29183B

REQUIREMENTS:

The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1. Required necessary equipment shall be as specified in table III

Physical:

Weight (nominal): 100 pounds (34 kilograms).
Dimensions (maximum):
Length: 36 inches (623 millimeters (mm)).
Width: 16 inches (470 mm).
Height: 20 inches (419 mm).
Access panels: Not required (see MIL-P-29183).
Vertical center of gravity: 11.0 inches (280 mm).
Lifting attachments: Crane lifting attachments are not required (see MIL-P-29183). A MS18012 carrying handle is required.

Electrical:

Input: 208Y/120 volt (V), 3 phase, 4 pole (P), 5 wire (W), 60 Hertz.
Bus capacity: 60 amperes (A).
Government part number - M29183/15

AMSC N/A FSC 6110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:59Z
Check the source to verify that this is the current version before use.

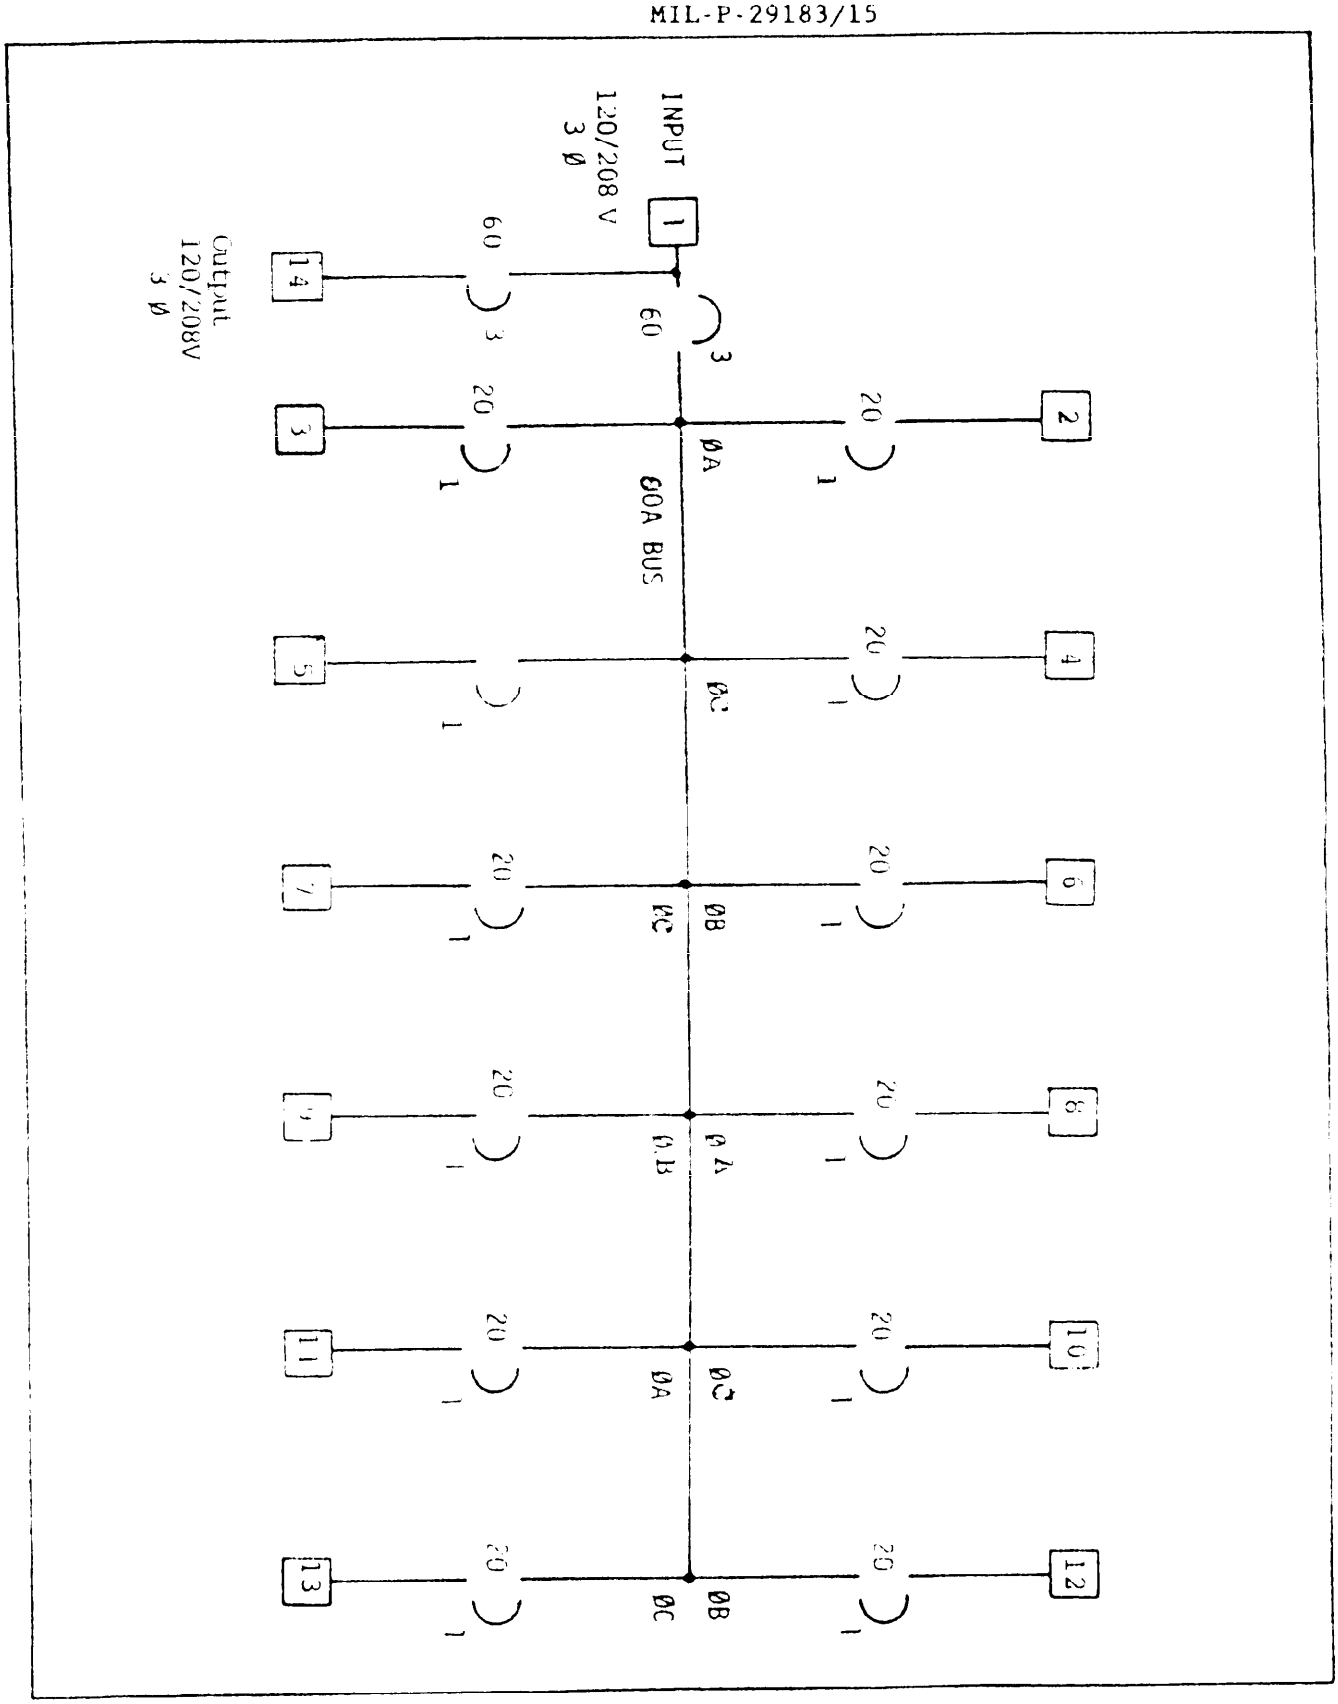


FIGURE 1. Single-line wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:59Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits' characteristics.

Quantity	Circuit kind	Circuit breaker Pole (P) - Ampere (A)	Interface connector
1	208Y/120V, 3 phase, 5W	3P-60A (Main)	Input, MS90558C32412P 1/
1	208Y/120V, 3 phase, 5W	3P-60A (feed thru)	MS9055C32412S 1/
12	120V, 1 phase, 3W	1P-20A, GFCI type	NEMA L5-20R 2/

1/ Connector designations are military part number for military type connectors conforming to MIL-C-22992.

2/ Connector designations conform to NEMA standards.

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	Connector type	Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral, white wire	Ground, green (bare) wire
1	Input	MS90558C32412P	A	B	C	N	G 1/
2,5,8,11	Branch	L5-20R	3/			W	G 2/
3,6,,9,12	Branch	L5-20R		3/		W	G 2/
4,7,10,13	Branch	L5-20R			3/	W	G 2/
14	Branch	MS90555C32412S	A	B	C	N	G 1/

1/ Connector designations are military part number for military type connectors conforming to MIL-C-22992.

2/ Connector designation conform to NEMA standards.

3/ Unmarked terminal

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:59Z
Check the source to verify that this is the current version before use.

TABLE III. Required Accessory Equipment

Item	Quantity	Description	Military part number
1	1	MIL-C-22992, class L, 60A wall mount, plug, with coupling ring, connector	MS90558C32412P
2	1	Protective cover (plug) for item 1	MS90564-3C
3	12	NEMA type connector locking L5-20R	NEMA Standard
4	12	Protective L5-20R receptor cover (cap) for item 3	NEMA Stamdard
5	1	MIL-C-22992, class L, 60A, box mount socket receptacle	MS90535C32412S
6	1	Protective cover (cap) for item 5	MS[illegible]

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review Activities:
Navy - MC, MS
Air Force - 80
DLA - GS

Preparing Activity:
Navy - YD

(Project 6110-0335-03)

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:59Z
Check the source to verify that this is the current version before use.