MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF, TYPE 1, CLASS 1, CONFIGURATION 1: 208Y/120 VOLT, 10 KILOWATT, WITHOUT MAIN BREAKERS, WITH FEEDTHROUGH CONNECTOR

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the distribution panels described herein shall consist of this specification and the latest issue of MIL-P-29183.

REQUIREMENTS: The distribution panel shall be as specified herein and in accordance with tables I and II, and figures 1 and 2.

Physical:

Special design features: See figure 2.

(A) Weight (nominal): 40 pounds (18 kilograms).
Dimensions (maximum):
Length: 22.5 inches (572 millimeters (mm)).
Width: 22.5 inches (572 mm).
Height: 22.5 inches (572 mm).
Access panels: Not required (see MIL-P-29183).
Vertical center of gravity: 12.5 inches (318 mm) above level ground.
Lift attachments: Crane lifting attachments are not required (see MIL-P-29183). Carrying handle is required.

Electrical:

Input: 208Y/120 volt (V), 3 phase (Ø), 4 pole (P), 5 wire (W), 60 Hertz.
Bus capacity: 100 amperes (A).

Government part number - M29183/1

(A) denotes changes

FSC 6110

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:56Z
Check the source to verify that this is the current version before use.



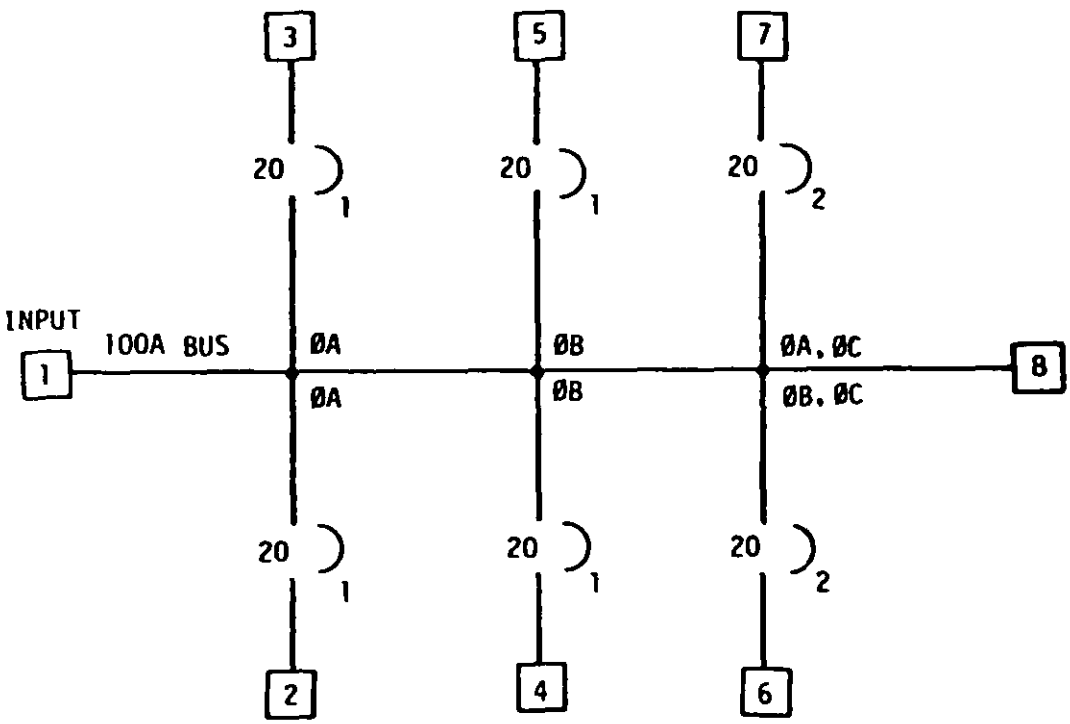


FIGURE 1. Single-line wiring diagram.


Source: https://assist.dla.mil -- Downloaded: 20261O-20T21:56Z
Check the source to verify that this is the current version before use.

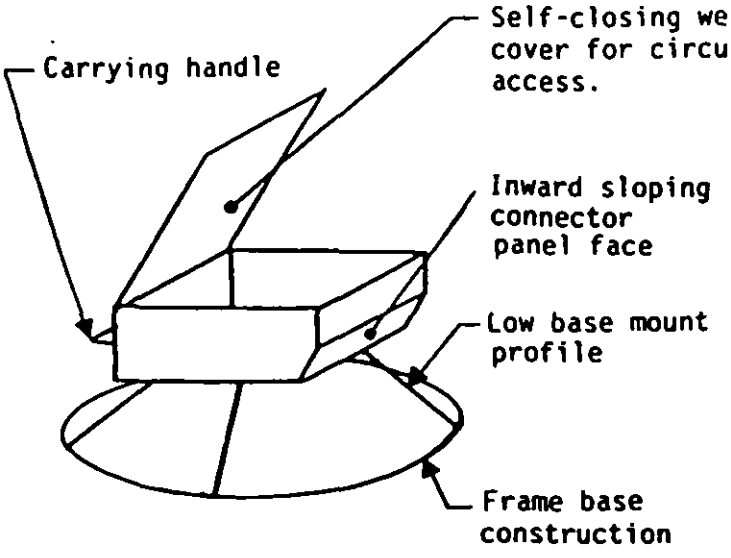


A. Circular frame base

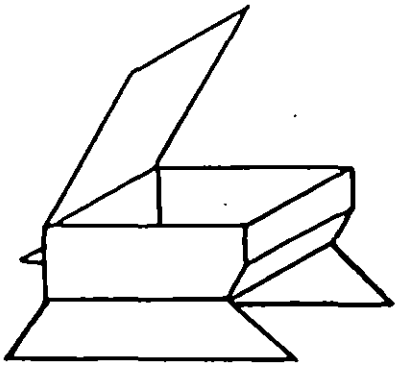

B. Trapezoid frame base

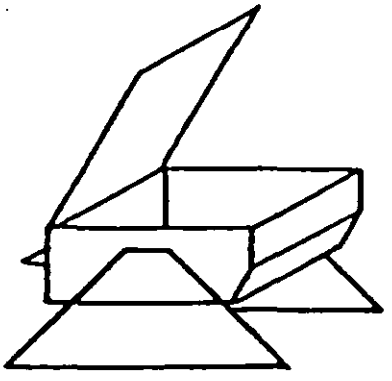

C. "A" frame base

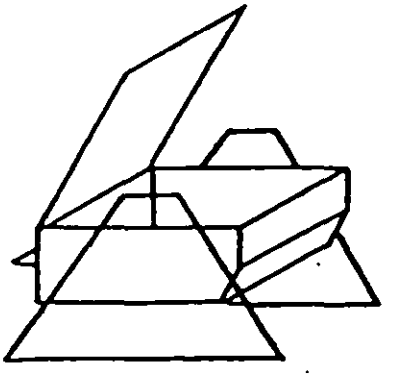

D. Extended "A" frame base

NOTES:

1. These drawings are for reference only and illustrate some of the features required by the specification of which it is a part. It is not intended that these drawings limit the design except for the requirements specified herein.

2. Base mount type shall be similar to figure 2A, or 2B, or 2C, or 2D.

3. Carrying handle, inward sloping connector panel face(s), self-closing cover, frame base construction, and low base mount profile are required.

FIGURE 2. Distribution panel design features.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:56Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits' characteristics.

Quantity	Circuit kind	Circuit breaker Pole(P)-Ampere(A)	Interface connector 1/
1	208Y/120V, 3 phase, 4P, 5W	None	Input, NEMA L21-30P
1	208Y/120V, 3 phase, 4P, 5W	None	Feedthrough, NEMA L21-30R
2	208V/120V, 1 phase, 3P, 4W	2P-20A	NEMA L14-20R
4	120V, 1 phase, 2P, 3W	1P-20A GFCI type	NEMA L5-20R

1/ Connector designations are National Electrical Manufacturers Association (NEMA) type numbers unless indicated otherwise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	Connector type 1/	Connector terminal wiring				
			Phase A black wire	Phase B red wire	Phase C blue wire	Neutral white wire	Ground green (bare) wire
1	Input 208V, 3 phase	NEMA L21-30P	X	Y	Z	W	G
2,3	Branch 120V, 1 phase	NEMA L5-20R	X	-	-	W	G
4,5	Branch 120 V, 1 phase	NEMA L5-20R	-	X	-	W	G
6	Branch 208V, 1 phase	NEMA L14-20R	-	X	Y	W	G
7	Branch 208V, 1 phase	NEMA L14-20R	X	-	Y	W	G
8	Feedthrough 208V, 3 phase	NEMA L21-30R	X	Y	Z	W	G

1/ Connector designations are National Electrical Manufacturers Association (NEMA) type numbers unless indicated otherwise.

Custodian:

Navy - YD

Review Activity:

Navy - MC

Preparing Activity:

Navy - YD

(Project 6110-N270-1)

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:56Z
Check the source to verify that this is the current version before use.