MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF, TYPE 1, CLASS 1, CONFIGURATION 4: 208Y/120 VOLT, 100 KILOWATT

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the distribution panels described herein shall consist of this specification and the latest issue of MIL-P-29183.

REQUIREMENTS: The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1. Government-furnished equipment shall be as specified in table III.

Physical:

(A) Weight (nominal): 360 pounds (164 kilograms).
Dimensions (maximum):
Length: 57.5 inches (1461 millimeters (mm)).
Width: 32.5 inches (826 mm).
Height: 35.5 inches (902 mm).
Vertical center of gravity: 21 inches (533 mm) above level ground.
Paralleling access panel: Required (see MIL-P-29183).

Electrical:

Input: 208Y/120 volt (V) or 208 V, 3 phase (Ø), 4 pole (P), 4 wire (W), 60 Hertz.
Bus capacity : 800 amperes (A).
Modification capability: Design provisions shall be made to accommodate in the future an additional 3P-350A main breaker and an additional set of input terminals for dual input capability.

Government part number - M29183/6

(A) denotes changes

FSC 6110

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:57Z
Check the source to verify that this is the current version before use.

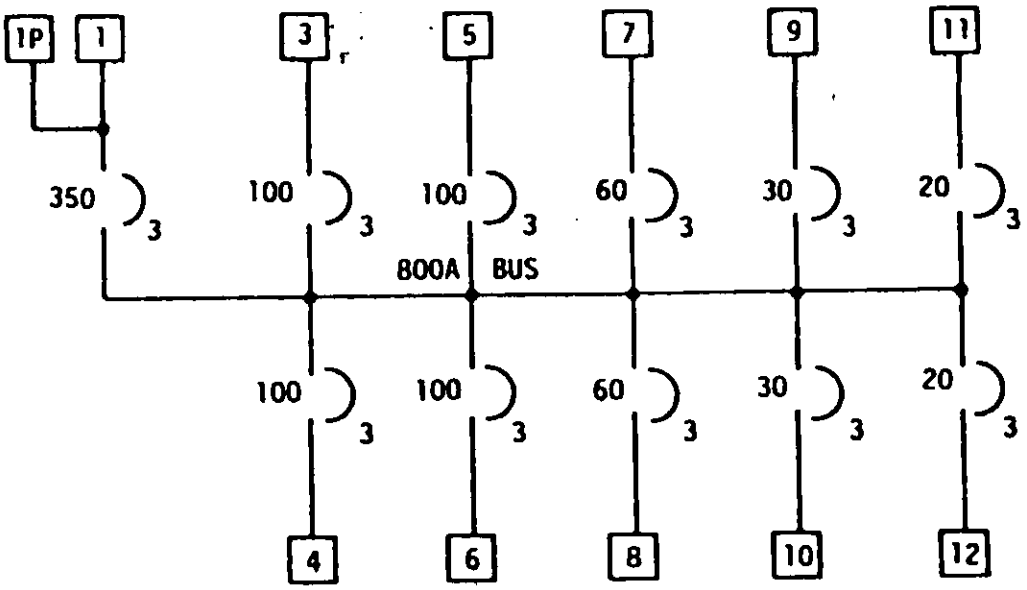


FIGURE 1. Single-line wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:57Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits' characteristics.

Quantity	Circuit kind	Circuit breaker Pole (P)-Ampere(A)	Interface connector 1/
1	208Y/120V, 3 phase, 4P, 5W	3P-350A (Main)	Input, terminals
4	208Y/120V, 3 phase, 4P, 5W	3P-100A	MS90555C44412S
2	208Y/120V, 3 phase, 4P, 5W	3P-60A	MS90555C32412S
2	208Y/120V, 3 phase, 4P, 5W	3P-30A	MS90555C28412S
2	208Y/120V, 3 phase, 4P, 5W	3P-20A	MS17346R24N10S

1/ Connector designations are the military part number for military type connectors conforming to MIL-C-22992.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:57Z
Check the source to verify that this is the current version before use.

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	1/ Connector type	Connector terminal wiring				
			Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral, white wire	Ground, green (bare) wire
1 1P	Input Paralleling	Pressure type, terminal block, minimum 600 MCM wire size capacity	T1 P1	T2 P2	T3 P3	T0 P0	G G
3,4,5,6	Branch	MS90555C44412S	A	B	C	N	G
7,8	Branch	MS90555C32412S	A	B	C	N	G
9,10	Branch	MS90555C28412S	A	B	C	N	G
11,12	Branch	MS17346R24N10S	F	B	E	A	C

1/ Connector designations are the military part number for military type connectors conforming to MIL-C-22992.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:57Z
Check the source to verify that this is the current version before use.

TABLE III. Government-furnished equipment.

Item	Quantity	Description	Military part number
1	4	MIL-C-22992, class L, 100A wall mount socket receptacle	MS90555C44412S
2	4	Protective cover (cap) for item 1	MS90563-7C
3	2	MIL-C-22992, class L, 60A, wall mount socket receptacle	MS90555C32412S
4	2	Protective cover (cap) for item 3	MS90563-3C
5	2	MIL-C-22992, class L, 40A, wall mount socket receptacle	MS90555C28412S
6	2	Protective cover (cap) for item 5	MS90563-1C
7	2	MIL-C-22992, class R, size 24, box mount socket receptacle	MS17346R24M10S
8	2	Protective receptacle cover for item 7	MS17349M24B

Custodian:

Navy - YD

Review Activity:

Navy - MC

Preparing Activity:

Navy - YD

(Project 6110-M270-6)

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:57Z
Check the source to verify that this is the current version before use.