MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF, TYPE 1, CLASS 1, CONFIGURATION 5: 480 or 208 VOLT 120 KILOWATT, TERMINAL TYPE CONNECTORS

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the distribution panels described herein shall consist of this specification and the latest issue of MIL-P-29183.

REQUIREMENTS: The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1.

Physical:

(A) Weight (nominal): 460 pounds (210 kilograms).
Dimensions (maximum):
Length: 34.5 inches (876 millimeters (mm)).
Width: 32.5 inches (826 mm).
Height: 32.5 inches (826 mm).
Vertical center of gravity: 21 inches (533 mm) above level ground.

Electrical:


Input: 480 volt (V) or 208V, 3 phase (Ø), 4 pole (P), 5 wire (W), 60 Hertz.
Bus capacity: 400 amperes (A).

Government part number - M29183/7

(A) denotes changes

FSC 6110

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:57Z
Check the source to verify that this is the current version before use.

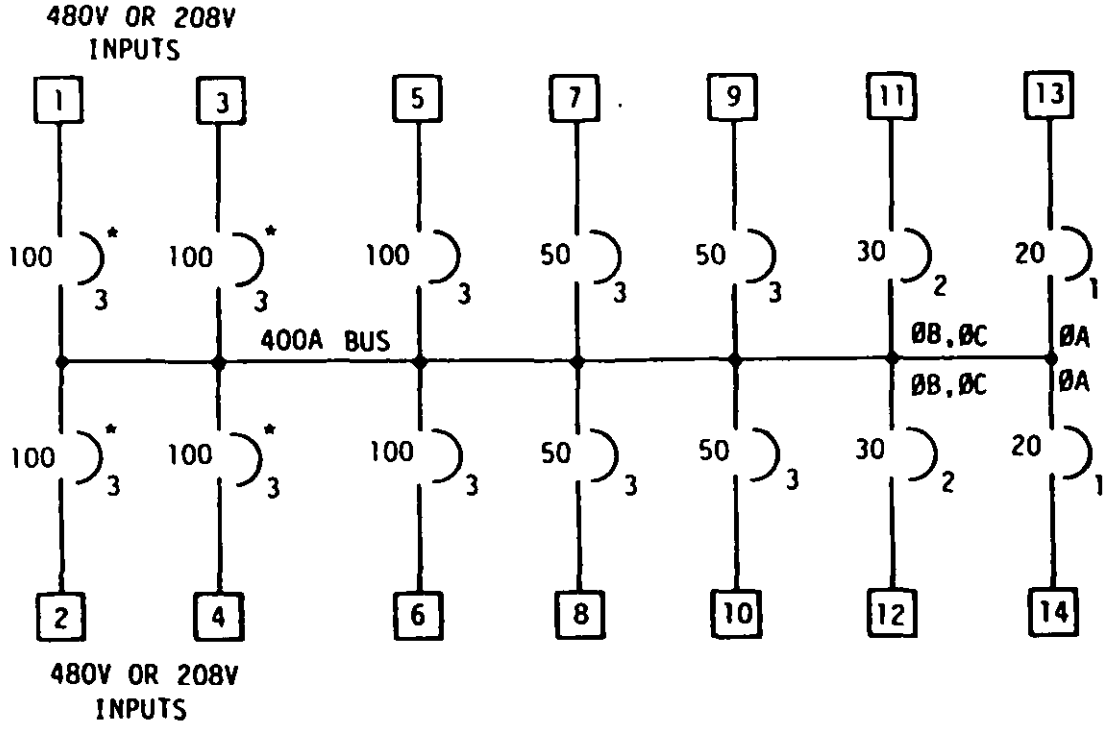

NOTE:

* CIRCUIT BREAKERS 1,2,3,4 SHALL NOT HAVE TRIP UNITS. THEY SHALL BE USED AS DISCONNECT DEVICES.

FIGURE 1. Single-line wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:57Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits' characteristics.

Quantity	Circuit kind	Circuit breaker Pole (P) - Ampere (A)	Interface connector
4	480V or 208V, 3 phase, 4P, 5W	3P-100A, (without trip)	Input, terminals
2	480V or 208V, 3 phase, 4P, 5W	3P-100A	Terminals
4	480V or 208V, 3 phase, 4P, 5W	3P-50A	Terminals
2	480V or 208V, 3P, 4W	2P-30A	Terminals
2	480V or 208V, 1 phase, 2P, 3W	1P-20A	Terminals

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:57Z
Check the source to verify that this is the current version before use.

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	Connector type	Connector terminal wiring				
			Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral, white wire	Ground, green (bare) wire
1,2, 3,4	Input	Pressure type, terminal block, minimum No. 1 wire size capacity	T1	T2	T3	TO	G
5,6	3 phase, Branch	Pressure type, terminal block, minimum No. 1 AWG wire size capacity	L1	L2	L3	LO	G
7,8, 9,10	3 phase, Branch	Pressure type, terminal block	L1	L2	L3	LO	G
11,12	Branch	Pressure type, terminal block	-	X	Y	W	G
13,14	1 phase, Branch	Pressure type, terminal block	X	-	-	W	G

Custodian:

Navy - YD

Review Activity:

Navy - MC

Preparing Activity:

Navy - YD

(Project 6110-N270-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:57Z
Check the source to verify that this is the current version before use.