MIL-P-29183/8A(NAVY)
24 May 1985
SUPERSEDING
MIL-P-29183/8(NAVY)
30 November 1979

MILITARY SPECIFICATION SHEET

# PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF, TYPE 1, CLASS 1, CONFIGURATION 6: 480 or 208 VOLT 240 KILOWATT, TERMINAL TYPE CONNECTORS

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the distribution panels described herein shall consist of this specification and the latest issue of MIL-P-29183.

REQUIREMENTS: The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1.

Physical:

(A) Weight (nominal): 500 pounds (227 kilograms).
Dimensions (maximum):
Length: 70.5 inches (1791 millimeters (mm)).
Width: 32.5 inches (826 mm).
Height: 32.5 inches (826 mm).
Vertical center of gravity maximum: 21 inches (533 mm) above level ground.

Electrical:


Input: 480 volt (V) or 208V, 3 phase (Ø), 4 pole (P), 5 wire (W), 60 Hertz.
Bus capacity: 800 amperes (A).

Government part number - M29183/8

(A) denotes changes

FSC 6110

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:58Z
Check the source to verify that this is the current version before use.

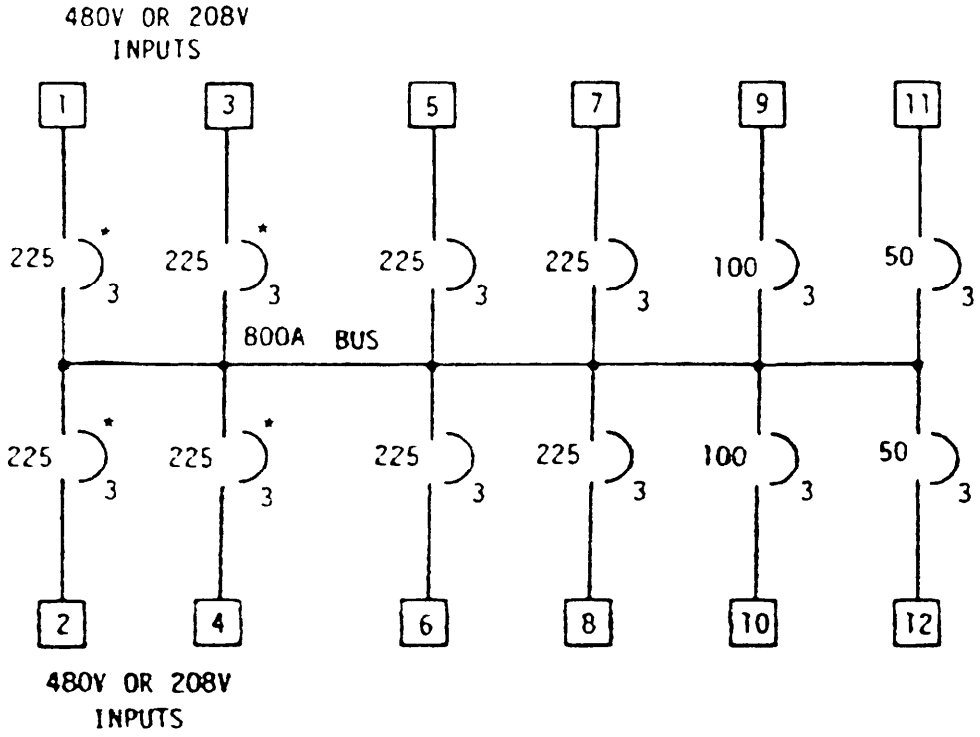


NOTE:

* CIRCUIT BREAKERS 1,2,3,4 SHALL NOT HAVE TRIP UNITS. THEY SHALL BE USED AS DISCONNECT DEVICES.

**FIGURE 1. Single-line wiring diagram.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:58Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits' characteristics.

| Quantity | Circuit kind | Circuit breaker Pole (P) - Ampere (A) | Interface connector |
|---|---|---|---|
| 4 | 480V or 208V, 3 phase, 4P, 5W | 3P-225A, (without trip) | Input, terminals |
| 4 | 480V or 208V, 3 phase, 4P, 5W | 3P-225A | Terminals |
| 2 | 480V or 208V, 3 phase, 4P, 5W | 3P-100A | Terminals |
| 2 | 480V or 208V, 3 phase, 4P, 5W | 3P-50A | Terminals |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:58Z
Check the source to verify that this is the current version before use.

TABLE II. Connector assignment and connector terminal wiring.

| Circuit | Function | Connector type | Connector terminal wiring | | | | |
|---|---|---|---|---|---|---|---|
| | | | Phase A, black wire | Phase B, red wire | Phase C, blue wire | Neutral, white wire | Ground, green (bare) wire |
| 1,2, 3,4 | Input | Pressure type, terminal block, 250 MCM wire size capacity | T1 | T2 | T3 | T0 | G |
| 5,6 7,8 | 3 phase, Branch | Pressure type, terminal block, 250 MCM wire size capacity | X | Y | Z | W | G |
| 9,10 11,12 | 3 phase, Branch | Pressure type, terminal block No. 1 AWG wire size capacity | X | Y | Z | W | G |

Custodian:

Navy - YD

Review Activity:

Navy - MC

Preparing Activity:

Navy - YD

(Project 6110-N270-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:58Z
Check the source to verify that this is the current version before use.