MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF, TYPE 1, CLASS 1, CONFIGURATION 7: 480 or 208 VOLT 400 KILOWATT, TERMINAL TYPE CONNECTORS

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the distribution panels described herein shall consist of this specification and the latest issue of MIL-P-29183.

REQUIREMENTS: The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1.

Physical:

(A) Weight (nominal): 700 pounds (318 kilograms).
Dimensions (maximum):
Length: 70.5 inches (1791 millimeters (mm)).
Width: 32.5 inches (826 mm).
Height: 32.5 inches (826 mm).
Vertical center of gravity maximum: 21 inches (533 mm) above level ground.

Electrical:

Input: 480 volt (V) or 208V, 3 phase (Φ), 4 pole (P), 5 wire (W), 60 Hertz.
Bus capacity: 1200 amperes (A).


Government part number - M29183/9

(A) denotes changes

FSC 6110

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:58Z
Check the source to verify that this is the current version before use.

In the fine thread series. Terminal threads shall be Class 2A and 2B for

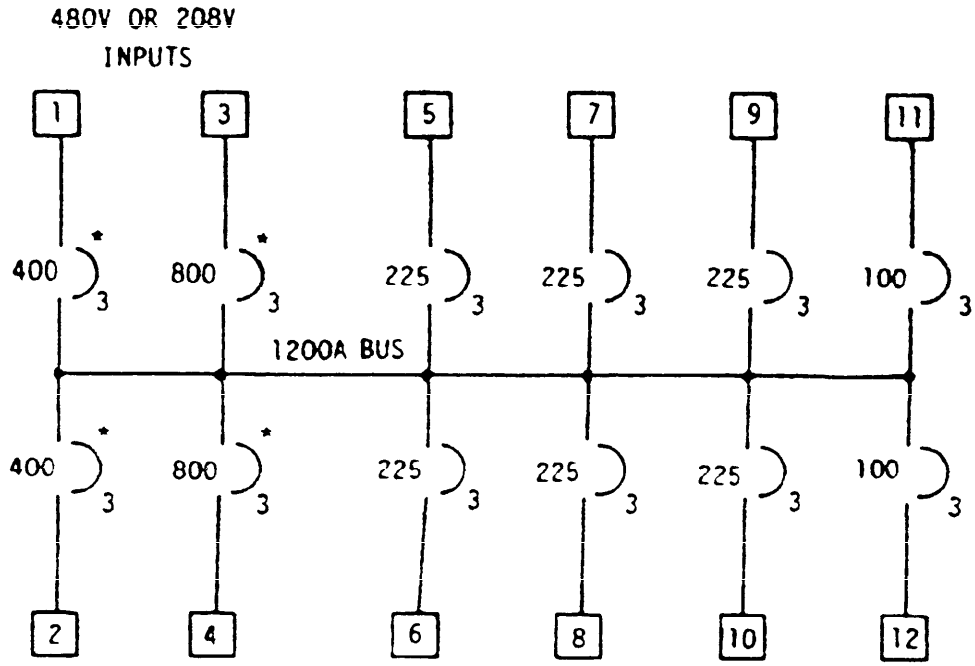

NOTE:

* CIRCUIT BREAKERS 1,2,3,4 SHALL NOT HAVE TRIP UNITS. THEY SHALL BE USED AS DISCONNECT DEVICES.

FIGURE 1. Single-line wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:58Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits' characteristics.

Quantity	Circuit kind	Circuit breaker Pole (P) - Ampere (A)	Interface connector
2	480V or 208V, 3 phase, 4P, 5W	3P-800A, (without trip)	Input, terminals
2	480V or 208V, 3 phase, 4P, 5W	3P-400A, (without trip)	Terminals
6	480V or 208V, 3 phase, 4P, 5W	3P-225A	Terminals
2	480V or 208V, 3 phase, 4P, 5W	3P-100A	Terminals

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:58Z
Check the source to verify that this is the current version before use.

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	Connector type	Connector terminal wiring				
			Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral, white wire	Ground, green (bare) wire
1,2,	Input	Pressure type, terminal block, minimum 500 MCM wire capacity	T1	T2	T3	T0	G
3,4	Input	Pressure type, terminal block, with two minimum 500 MCM size capacity terminals for each phase and neutral	T1	T2	T3	T0	G
5,6,7, 8,9,10	Branch	Pressure type, terminal block, 250 MCM wire size capacity	L1	L2	L3	L0	G
11,12	Branch	Pressure type, terminal block, minimum No. 1 AWG wire size capacity	L1	L2	L3	L0	G

Custodian:

Navy - YD

Review Activity:

Navy - MC

Preparing Activity:

Navy - YD

(Project 6110-N270-9)

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:58Z
Check the source to verify that this is the current version before use.

maintained in Government [illegible] and shall not be