MILITARY SPECIFICATION SHEET

PANELBOARDS, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF TYPE 1, CLASS 1, CONFIGURATION 3: 208Y/120 VOLT, 30 KILOWATT

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring distribution panels described herein shall consist of this document and the lastest issue of MIL-P-29183.

REQUIREMENTS. The distribution panel shall be as specified herein and in accordance with Tables I and II, and Figure 1. Government furnished equipment shall be as specified in Table III.

Physical.

Nominal weight: 165 pounds (75 kilograms).
Maximum dimensions: Length: 40 inches (in) (1016 millimeters (mm)), Width: 32 in (813 mm), Height: 35 in (889 mm).
Vertical center of gravity: 20.5 ±0.5 in (521 ±13 mm) above level ground.

Electrical.

Input: 208Y/120 volt (V), 3 phase, 4 pole (P), 5 Wire (W), 60 Hertz.
Bus capacity: 225 amperes (A).

Modification capability: Design provisions shall be made to accommodate in the future as additional 3P-100A main breaker and an additional MS90558C44412P connector for dual input capability.

Government part number - M29183/11.

FSC 6110

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:58Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits characteristics.

Quantity	Circuit kind	Circuit breaker Pole(P) - Ampere(A)	*Interface connector
1	208/120V, 3 phase, 4P, 5W	3P-100A (MAIN)	Input MS90558C44412P
4	208/120V 3 phase, 4P, 5W	3P-60A	MS90555C32412S
2	208/120V, 3 phase, 4P, 5W	3P-30A	MS90555C32412S
2	208/120V, 3 phase, 4P, 5W	3P-40A	MS90555C32412S
2	120V, 1 phase 2P, 3W	1P-20A	MS17346R22N2S

* Connector designations are military part number for military type connectors conforming, to MIL-C-22992.

TABLE II. Connector assignment and connector terminal wiring.

			Connector terminal wiring				
Circuit	Function	*Connector type	Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral white wire	Ground, green bare wire
1	Input	MS90558C44412P	A	B	C	N	G
3,4,5,6 7,8,9,10	Branch	MS90555C32412S	A	B	C	N	G
11	Branch	MS17346R22N2S	B	-	-	C	A
12	Branch	MS17346R22N2S	-	B	-	C	A

*Connector designations are military part number for military type connectors conforming to MIL-C-22992.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:58Z
Check the source to verify that this is the currenversion before use.

TABLE III. Government-furnished equipment.

Item	Quantity	Description	Military part number
1	1	MIL-C-22992, class L, 100A wall mount plug, with coupling ring, connector.	MS90558C44412P
2	1	Protective cover (plug) for item 1	MS90564-7C
3	8	MIL-C-22992, class L, 60A, wall mount socket receptacle connector	MS90555C32412S
4	8	Protective cover (cap) for item 3	MS90563-3C
5	2	MIL-C-22992, class R, size 22, box mount socket receptacle	MS17346R22N2S
6	2	Protective receptacle cover for item 7	MS1734922B

Custodian:

Navy - YD

Preparing Activity:

Navy - YD

(Project 6110-N274)

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:58Z
Check the source to verify that this is the currentversion before use.

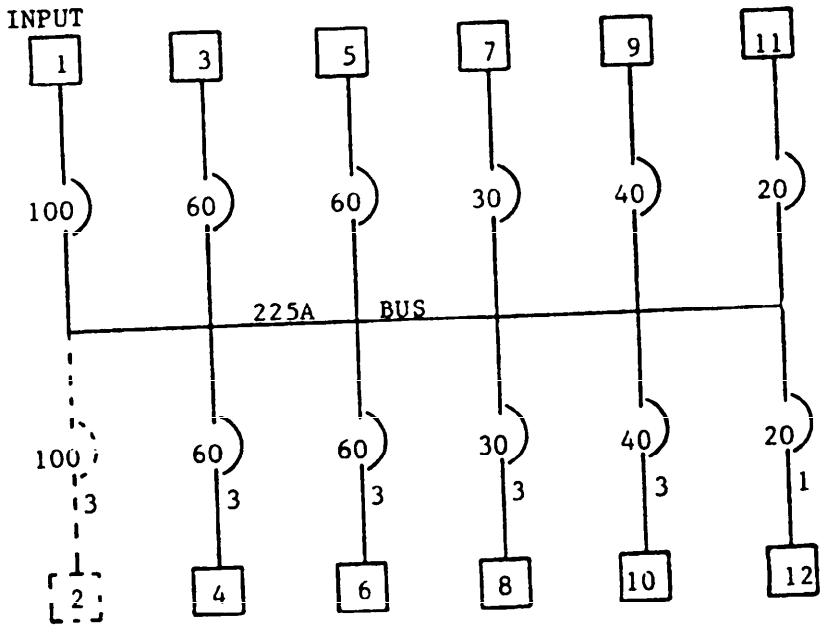


FIGURE 1. Single-line wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:58Z
Check the source to verify that this is the current version before use.