MILITARY SPECIFICATION

MICROCIRCUITS, ANALOG SWITCH WITH DRIVER, MONOLITHIC AND MULTI-CHIP SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for silicon, break-before-make, monolithic and multi-chip analog switches with drivers. Three product assurance classes and a choice of case outline and lead finish are provided for each type and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as shown in the following:

Device type	Circuit
01	Dual channel, 30Ω, SPST switches
02	Dual channel, 75Ω, SPST switches
03	Dual channel, 30Ω, DPST switches
04	Dual channel, 75Ω, DPST switches
05	Single channel, 30Ω, SPDT switch
06	Single channel, 75Ω, SPDT switch
07	Dual channel, 30Ω, SPDT switches
08	Dual channel, 75Ω, SPDT switches

NOTE: A channel is defined as a driver with associated switches.

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Outline letter	MIL-M-38510, appendix C, case outline
A	F-1 (14-lead, 1/4" x 1/4", flat-pack)
C	D-1 (14-lead, 1/4" x 3/4", dual-in-line)
D	F-2 (14-lead, 1/4" x 3/8", flat-pack)
E	D-2 (16-lead, 1/4" x 7/8", dual-in-line)
I	A-2 (10-lead, can)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center, RBRD, Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

1.3 Absolute maximum ratings.

Voltage, negative supply to positive supply $[(+V_{CC}) - (-V_{CC})]$	36 Vdc
Voltage, drain to positive supply $(+V_{CC} - V_D)$	33 Vdc
Voltage, negative supply to drain $[V_D - (-V_{CC})]$	33 Vdc
Voltage, source to drain $(V_D - V_S)$	±22 Vdc
Voltage, negative supply to logic supply $[V_L - (-V_{CC})]$	36 Vdc
Voltage, input to logic supply $(V_L - V_{IN})$	8 Vdc
Voltage, reference supply to logic supply $(V_L - V_R)$	8 Vdc
Voltage, reference supply to input $(V_{IN} - V_R)$	8 Vdc
Voltage, negative supply to reference supply $[V_R - (-V_{CC})]$	27 Vdc
Voltage, input to reference supply $(V_R - V_{IN})$	2 Vdc
Current, any terminal	30 mA
Lead temperature (soldering, 60 sec)	300°C
Junction temperature	T_J = 175°C
Storage temperature	-65°C to +150°C

1.4 Recommended operation conditions.

Positive supply voltage $(+V_{CC})$	+15 Vdc
Negative supply voltage $(-V_{CC})$	-15 Vdc
Reference supply voltage (V_R)	GND
Logic supply voltage (V_L)	+5 Vdc
Ambient temperature range (T_A)	-55°C to +125°C

1.5 Power and thermal characteristics.

Package	Case outline	Maximum allowable power dissipation	Maximum θJ-C	Maximum θJ-A
Dual-in-line	C,E	400 mW @ T_A = 125°C	35°C/W	120°C/W
14-lead FP	D,A	350 mW @ T_A = 125°C	60°C/W	140°C/W
10-lead can	I	350 mW @ T_A = 125°C	40°C/W	140°C/W

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Detail specifications. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

3.2 Design, construction, and physical dimensions. The design, construction and physical dimensions shall be as specified in MIL-M-38510 and 1.2.3 herein.

3.2.1 Terminal connections. Terminal connections shall be as specified on figure 1. Switch positions shown are for a high level input logic.

3.2.2 Schematic circuit. The schematic circuit shall be as specified on figure 2.

3.3 Lead material and finish. Lead material and finish shall be in accordance with MIL-M-38510.

3.4 Electrical performance characteristics. The electrical performance characteristics of table I apply over the full operating ambient temperature range of -55°C to 125°C and for supply voltages as indicated in 1.4, unless otherwise specified.

3.4.1 Switch operation. The analog switches are guaranteed to turn "on" with either a low input ($V_R \leq V_{IL} \leq 0.8$ V) or a high input ($2V \leq V_{IH} \leq V_L$) as follows:

Device type	V_{IN}	Switch ON	Switch OFF
01,02	0.8 Vdc	1,2	---
	2.0 Vdc	---	1,2
03,04	0.8 Vdc	---	1,2,3,4
	2.0 Vdc	1,2,3,4	---
05,06	0.8 Vdc	2	1
	2.0 Vdc	1	2
07,08	0.8 Vdc	3,4	1,2
	2.0 Vdc	1,2	3,4

3.5 Electrical test requirements. Electrical test requirements shall be as specified in table III for the applicable device type and device class. The subgroups of table III and limits of table IV which constitute the minimum electrical test requirements for screening, qualification and quality conformance, by device class are as specified in table II.

3.6 Marking. Marking shall be in accordance with MIL-M-38510. At the option of the manufacturer, the following marking may be omitted from the body of the microcircuit, but shall be retained on the initial container.

a. Country of origin.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 57 (see MIL-M-38510 appendix E).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-M- 38510. Inspections to be performed shall be those specified herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.3 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in (method 1015 of MIL-STD-883).
   1. Required for class S devices: Test condition D using the circuit shown in figure 3.
   2. Required for class B devices: Test condition D using the circuit shown in figure 3, test condition C using the circuit shown in figure 4, or test condition F using the circuit shown in figure 5, or equivalent.

   NOTE: If accelerated high-temperature test conditions are used, the device manufacturer shall ensure that at least 85% of the applied voltage is dropped across the device at temperature. The device is not considered functional under accelerated test conditions.

b. Reverse bias burn-in (method 1015 of MIL-STD-883).
   Required for class S devices only, using the circuit shown in figure 4.
   However, regardless of device class, for device types 05, 06, 07, and 08, an additional burn-in will be performed following an interim electrical test (see table II, PDA applies). The additional burn-in will be performed with the logic level of the switch drivers opposite to that used in the first burn-in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Characteristic	Symbol	Conditions 1/ (unless otherwise specified, V_L = +5 V, V_R = GND and $\pm V_{CC}$ = $\pm$15 V)	Temperature	Device type	Limits		Unit
					Min	Max	
Resistance drain-to-source (on)	R_{DS}	V_{IN} = (see 3.4.1) V_D = -7.5 V, I_S = -10 mA	-55°C $\leq T_A \leq$ 125°C	01,03, 05,07		60	Ω
		V_{IN} = (see 3.4.1) V_D = -10 V, I_S = -10 mA	-55°C $\leq T_A \leq$ 125°C	02,04, 06,08		150	Ω
Source leakage current (off)	$I_{S(OFF)}$	V_{IN} = (see 3.4.1), V_D = -10 V, V_S = 10 V, $+V_{CC}$ = 10 V, $-V_{CC}$ = -20 V	-55°C $\leq T_A \leq$ 125°C	All	-100	100	nA
		V_{IN} = (see 3.4.1), V_D = -7.5 V, V_S = +7.5 V	-55°C $\leq T_A \leq$ 125°C	01,03, 05,07	-100	100	nA
		V_{IN} = (see 3.4.1), V_D = -10 V, V_S = 10 V	-55°C $\leq T_A \leq$ 125°C	02,04, 06,08	-100	100	nA
Drain leakage current (off)	$I_{D(OFF)}$	V_{IN} = (see 3.4.1), V_D = 10 V, V_S = -10 V $+V_{CC}$ = 10 V, $-V_{CC}$ = -20 V	-55°C $\leq T_A \leq$ 125°C	All	-100	100	nA
		V_{IN} = (see 3.4.1), V_D = 7.5 V, V_S = -7.5 V	-55°C $\leq T_A \leq$ 125°C	01,03, 05,07	-100	100	nA
		V_{IN} = (see 3.4.1), V_D = 10 V, V_S = -10 V	-55°C $\leq T_A \leq$ 125°C	02,04, 06,08	-100	100	nA
Channel leakage current (on)	$I_{D(ON)}+$ $I_{S(ON)}$	V_{IN} = (see 3.4.1), V_D = V_S = -7.5 V	-55°C $\leq T_A \leq$ 125°C	01,03, 05,07	-200	200	nA
		V_{IN} = (see 3.4.1), V_D = V_S = -10 V	-55°C $\leq T_A \leq$ 125°C	02,04, 06,08	-200	200	nA
Low level input current	I_{IL}	V_{IN} = GND	-55°C $\leq T_A \leq$ 125°C	All	-250	-.1	µA
High level input current	I_{IH}	V_{IN} = 5 V	-55°C $\leq T_A \leq$ 125°C	All	-2	20	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics -Continued.

Characteristic	Symbol	Conditions 1/ (unless otherwise specified, V_L = +5 V, V_R = GND and $\pm V_{CC}$ = $\pm$15 V)	Temperature	Device type	Limits Min	Limits Max	Unit
Time to turn on	t_{ON}	See figure 9	T_A = -55°C	01,03, 05,07		150	ns
			T_A = 25°C			150	
			T_A = 125°C			300	
Time to turn on	t_{ON}	See figure 9	T_A = -55°C	02,04, 06,08		250	ns
			T_A = 25°C			250	
			T_A = 125°C			350	
Time to turn off	t_{OFF}	See figure 9	T_A = -55°C	All		130	ns
			T_A = 25°C			130	
			T_A = 125°C			200	
Positive supply current	$+I_{CC}$	V_{IN} = GND and 5 V	-55°C $\leq T_A \leq$ 125°C	01,02, 07,08		2.5	mA
			-55°C $\leq T_A \leq$ 125°C	05,06		1.4	mA
		V_{IN} = GND	-55°C $\leq T_A \leq$ 125°C	03,04		5	mA
		V_{IN} = 5 V	-55°C $\leq T_A \leq$ 125°C	03,04		1.7	mA
Negative supply current	$-I_{CC}$	V_{IN} = GND and 5 V	-55°C $\leq T_A \leq$ 125°C	01,02, 07,08	-8		mA
			-55°C $\leq T_A \leq$ 125°C	05,06	-4.8		mA
		V_{IN} = GND	-55°C $\leq T_A \leq$ 125°C	03,04	-8.8		mA
		V_{IN} = 5 V	-55°C $\leq T_A \leq$ 125°C	03,04	-6.4		mA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics -Continued.

Characteristic	Symbol	Conditions 1/ (unless otherwise specified, V_L = +5 V, V_R = GND and $\pm V_{CC}$ = ±15 V)	Temperature	Device type	Limits Min	Limits Max	Units
Logic supply current	I_L	V_{IN} = GND and 5 V	$-55°C \leq T_A \leq 125°C$	01,02,03, 04,07,08		7	mA
			$-55°C \leq T_A \leq 125°C$	05,06		5	mA
Reference supply current	I_R	V_{IN} = GND and 5 V	$-55°C \leq T_A \leq 125°C$	All	-2.2		mA
Charge transfer error	V_{CTE}	V_S = GND (see table III footnote 3/)	T_A = 25°C	All		20	mV
Crosstalk between channels	V_{CT} 2/	f = 10 MHz V_{gen} = 1 V_{p-p}	T_A = 25°C	All	50		dB
Single channel isolation	V_{ISO}	f = 10 MHz V_{gen} = 1 V_{p-p}	T_A = 25°C	All	50		dB
Break-before-make time delay	t_D	See figure 10	$-55°C \leq T_A \leq 125°C$	05,06, 07,08	5		ns

1/ Test conditions are specified in table III and figures 6, 7, 8, and 9.
2/ For monolithic devices only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirement	Subgroups (see table III)		
	Class S devices	Class B devices	Class C devices
Interim electrical parameters (preburn-in) (method 5004)	1	1	None
Final electrical test parameters (method 5004)	1*, 2, 3, 9	1*, 2, 3, 9	1
Group A test requirements (method 5005)	1, 2, 3, 9, 10, 11, 12	1, 2, 3, 9, 10, 11, 12	1, 2, 3, 9, 12
Group C end point and Group B, class S electrical parameters (method 5005)	1 and table IV delta limits	1 and table IV delta limits	1 and table IV delta limits
Additional electrical subgroups for group C periodic inspections	Not applicable	None	10, 11, 12
Group D end point electrical parameters (method 5005)	1, 2, 3, and table IV delta limits	1 and table IV delta limits	1 and table IV delta limits
Additional electrical subgroups for group D periodic inspections	(4,7)**	(4,7)**	(4,7)**

*PDA applied to subgroup 1 (see 4.3d).
**See 4.4.4c

c. Interim and final electrical test parameters shall be as specified in table II.
d. Percent defective allowable (PDA) - the PDA for class S devices shall be as specified in MIL-M-38510. The PDA is specified as 10 percent for class B devices based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with 5004 of MIL-STD-883, and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from preburn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1 after burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class. Those devices whose measured characteristics after burn-in exceed specified electrical parameter limits are defective and shall be removed from the lot.
e. Internal visual inspection (method 2010 of MIL-STD-883). For multichip devices, internal visual inspection shall be performed for each chip within the package.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Subgroups 5, 6, and 8 shall be omitted.
b. Tests shall be as specified in table II.


4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883 and as follows:

a. End point electrical parameters shall be as specified in table II herein.
b. Life test for class S shall be performed as specified in subgroup 5 of table IIa of method 5005 of MIL-STD-883 using circuit shown in figure 5.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

Case I

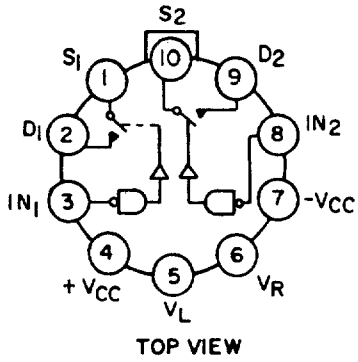

Cases A and D

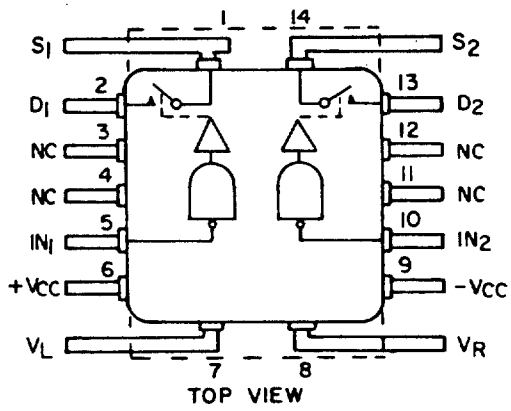

Case C


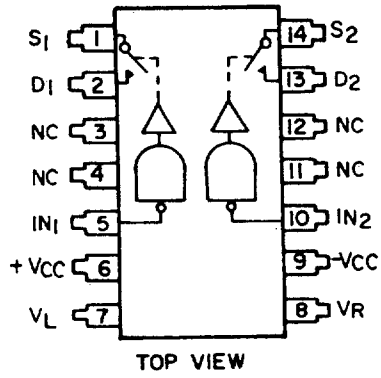


FIGURE 1. Terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.


Device types 03 and 04

Cases A and D

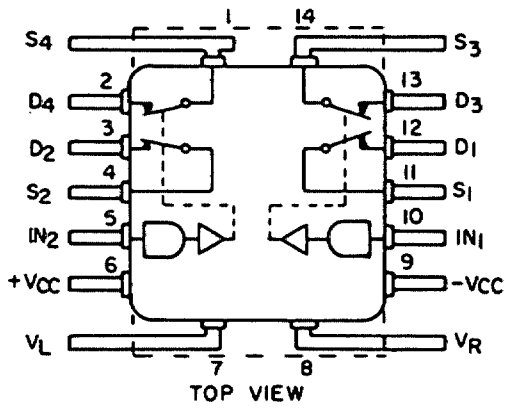

TOP VIEW

Case E

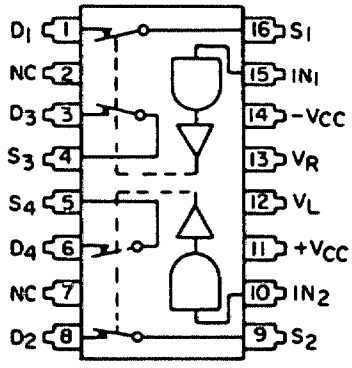

TOP VIEW


NOTES:
1. Switch positions are shown for the high logic level input condition.
2. $-V_{CC}$ may be connected to the base of metal packages (case I).

FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.


Device types 05 and 06

Case I




TOP VIEW

Cases A and D

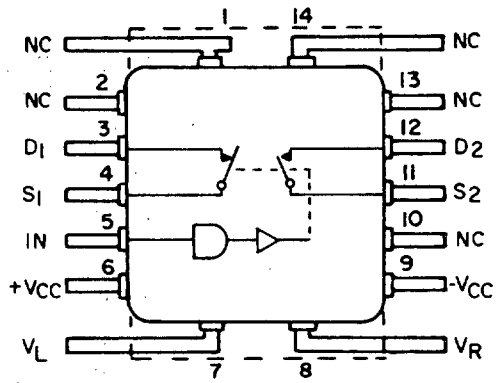

TOP VIEW

Case C

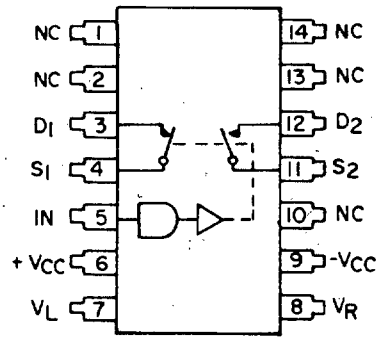

TOP VIEW


NOTES:
1. Switch positions are shown for the high logic level input condition.
2. $-V_{CC}$ may be connected to the base of metal packages (case I).

FIGURE 1. Terminal connections - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 07 and 08

Cases A and D

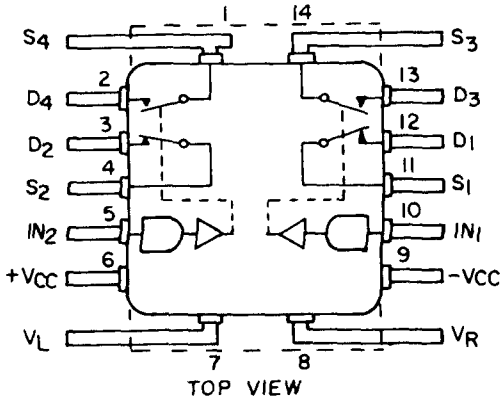

Case E

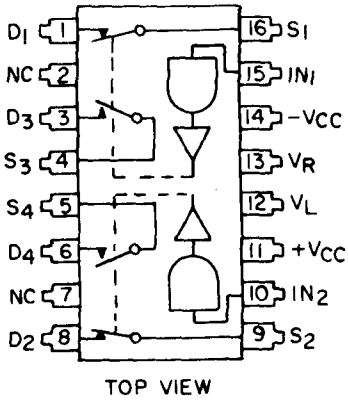


NOTES:
1. Switch positions are shown for the high logic level input condition.
2. $-V_{CC}$ may be connected to the base of metal packages (case I).

FIGURE 1. Terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

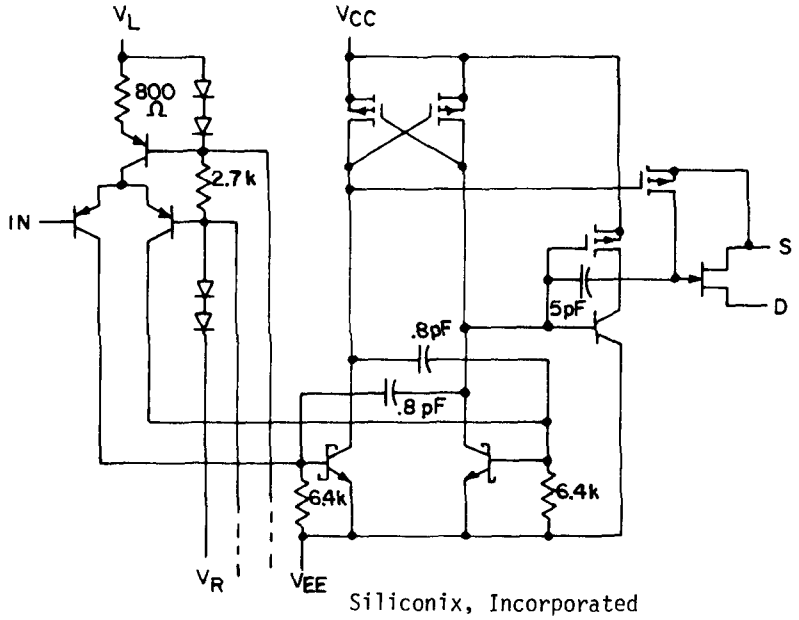

Device types 03 and 04


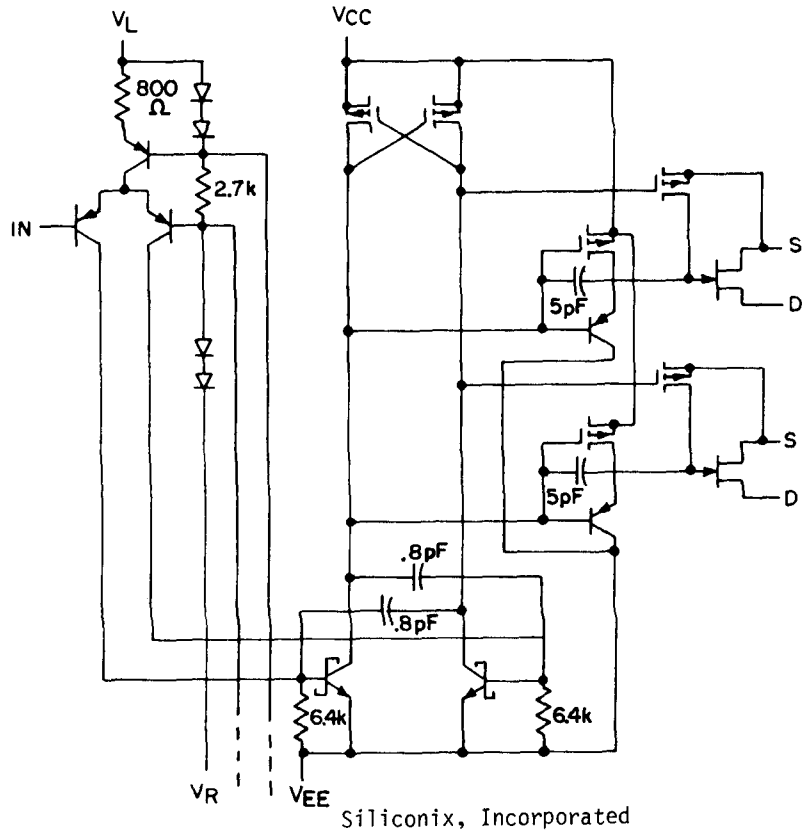


FIGURE 2. Schematic circuits.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 05 and 06

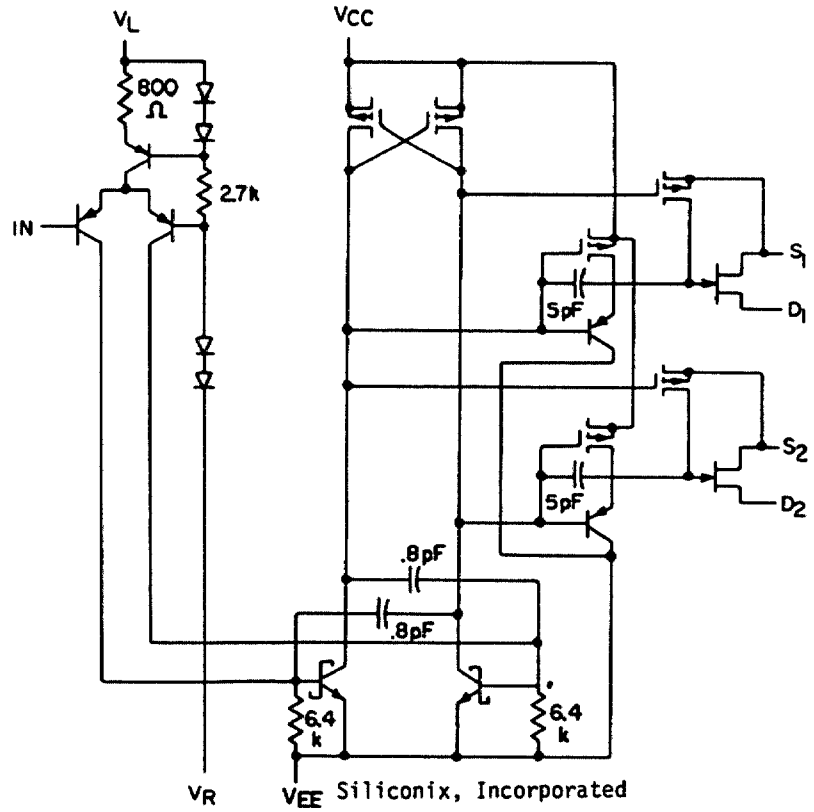

Siliconix, Incorporated

Device types 07 and 08

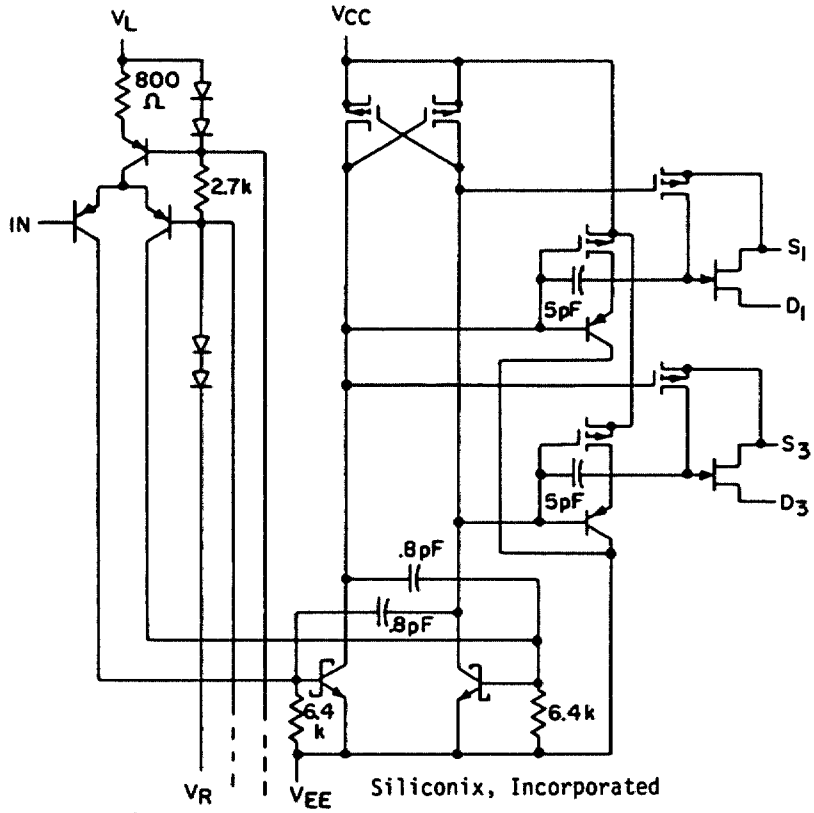


Siliconix, Incorporated

FIGURE 2. Schematic circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

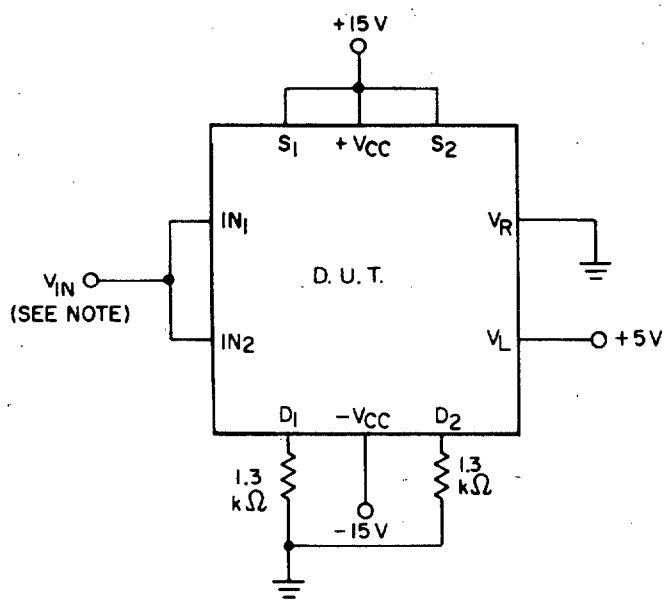

Device types 03, 04, 07 and 08


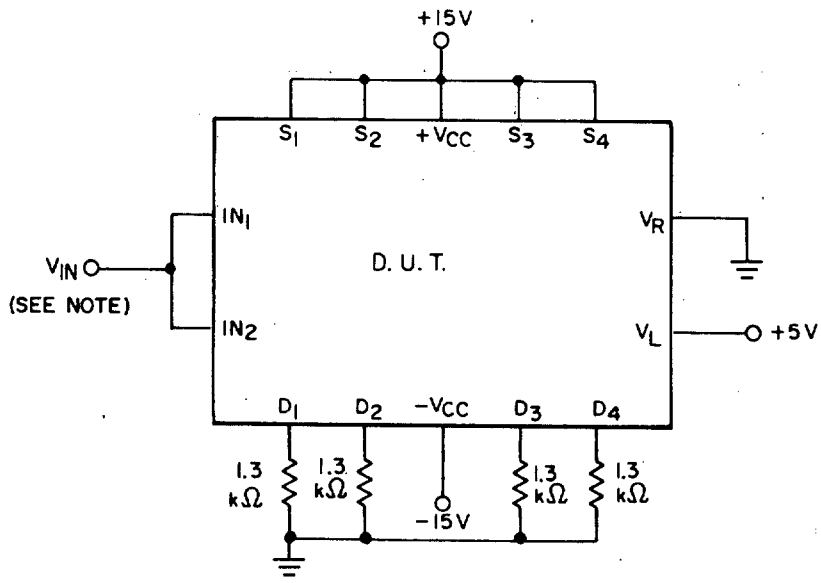


FIGURE 3. Test circuit, burn-in and operating life test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 05 and 06

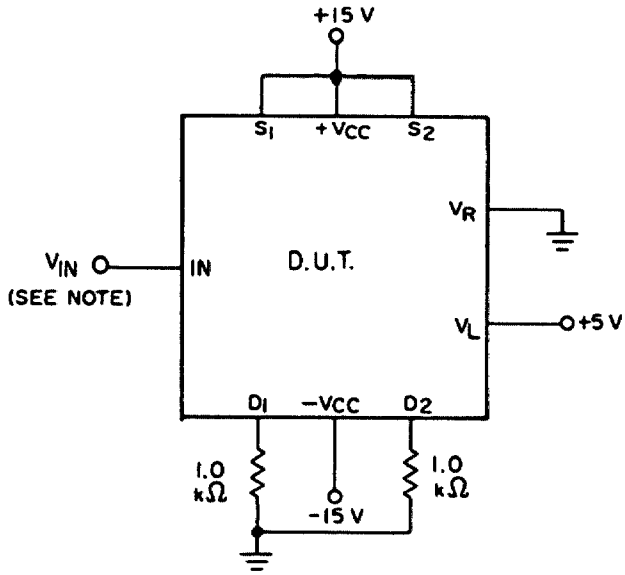


NOTE: The pulse generator shall have the following characteristics:

a. V_{gen} = 0 to 3.0 V.
b. Rise time ≤ 10 ns.
c. Fall time ≤ 10 ns.
d. PRR = 1 KHz at 50% duty cycle.

FIGURE 3. Test circuit, burn-in and operating life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

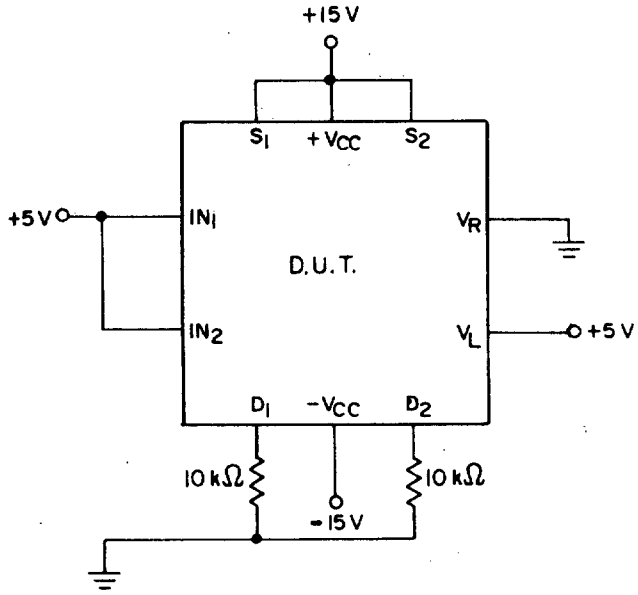

Device types 03 and 04

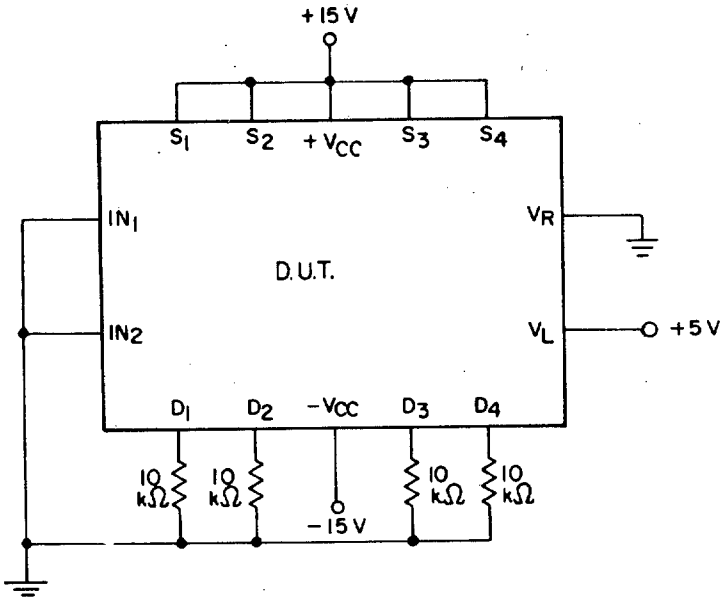


FIGURE 4. Test circuit, burn-in (steady state-reverse bias) and life test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 05 and 06

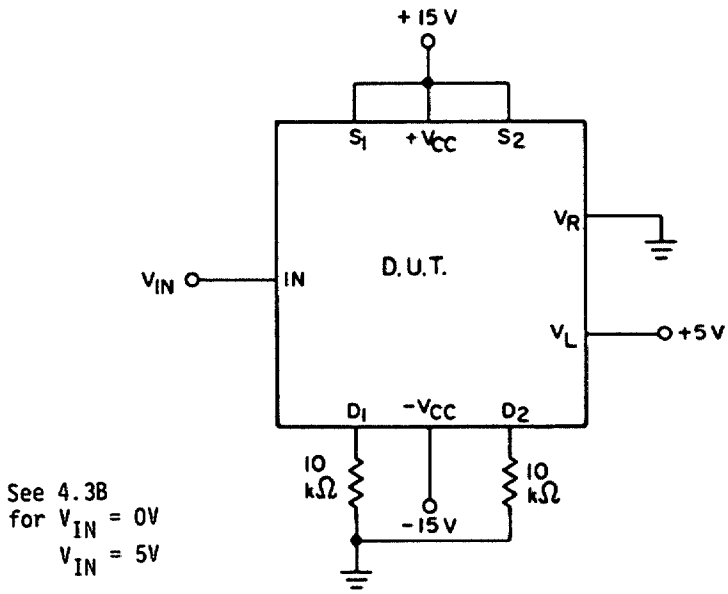


FIGURE 4. Test circuit, burn-in (steady state-reverse bias) and life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 07 and 08

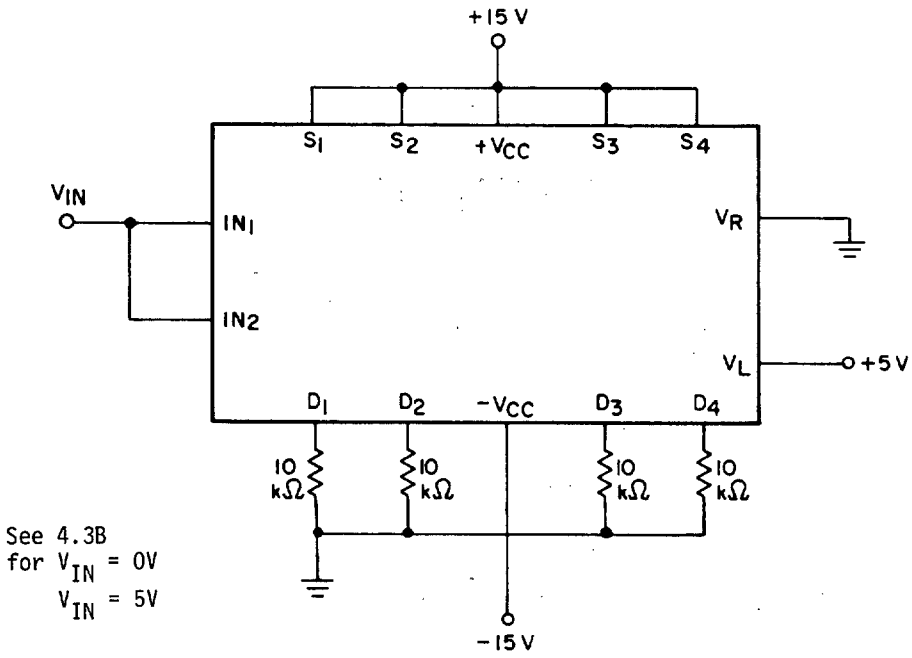


FIGURE 4. Test circuit, burn-in (steady state-reverse bias) and life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

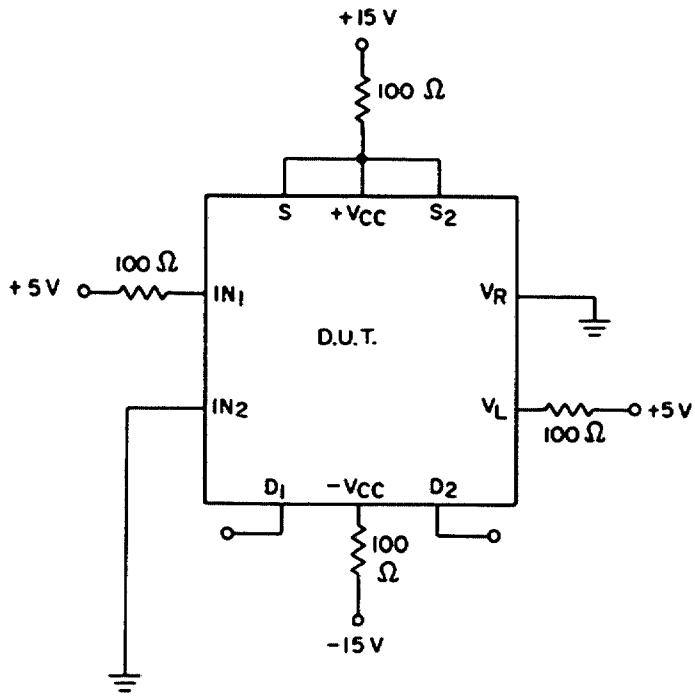


FIGURE 5. Test circuit, accelerated burn-in and life test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 05 and 06

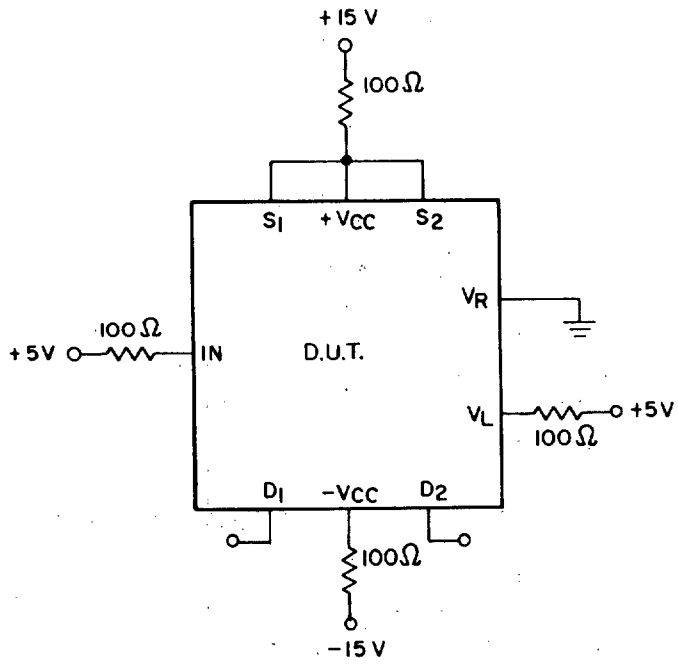


FIGURE 5. Test circuit, accelerated burn-in and life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device types 03, 04, 07 and 08

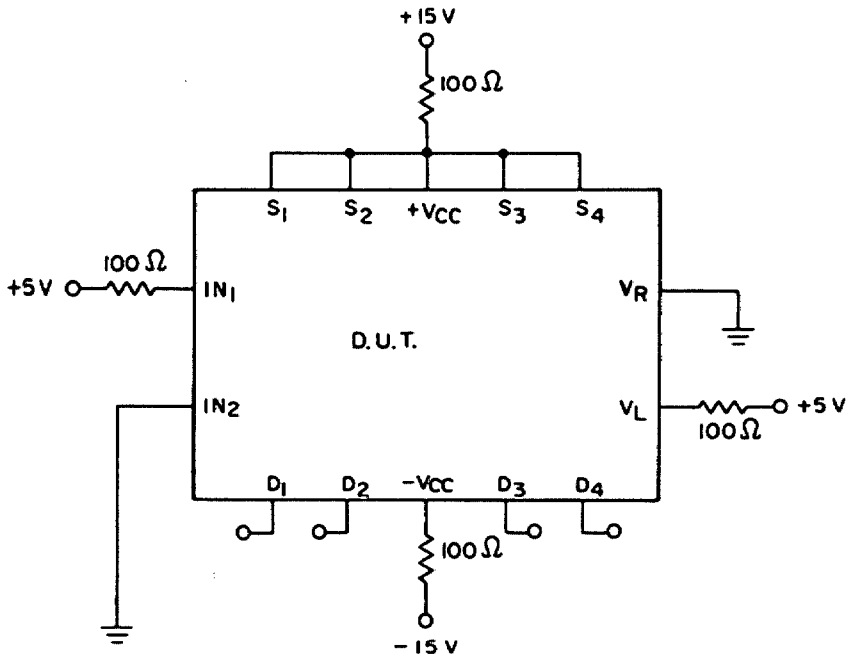


FIGURE 5. Test circuit, accelerated burn-in and life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

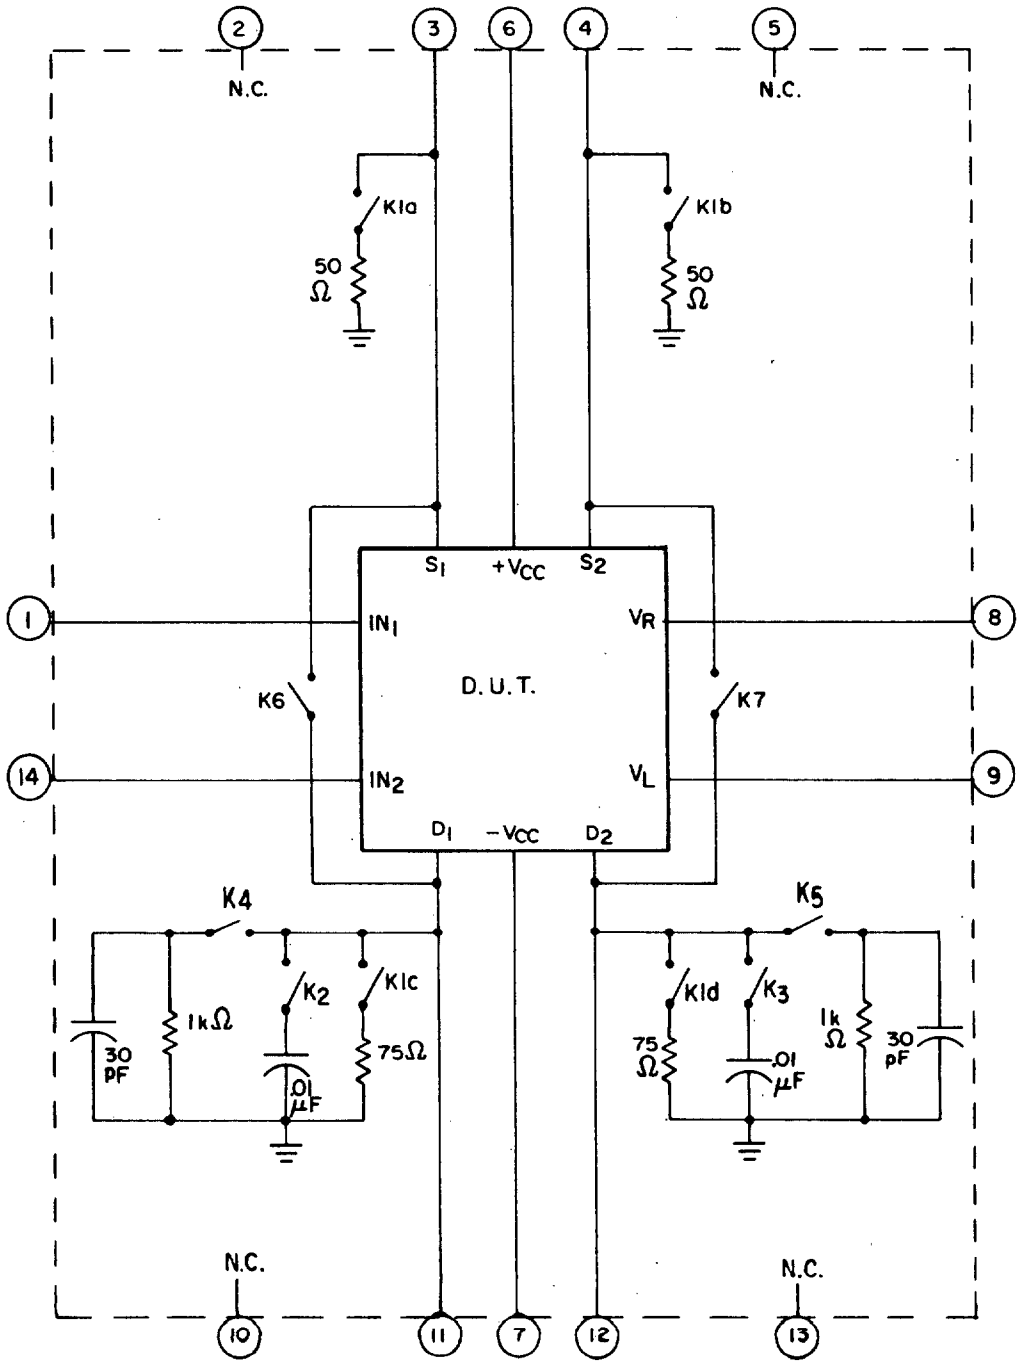


FIGURE 6. Test circuit (static and dynamic tests) for device types 01 and 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

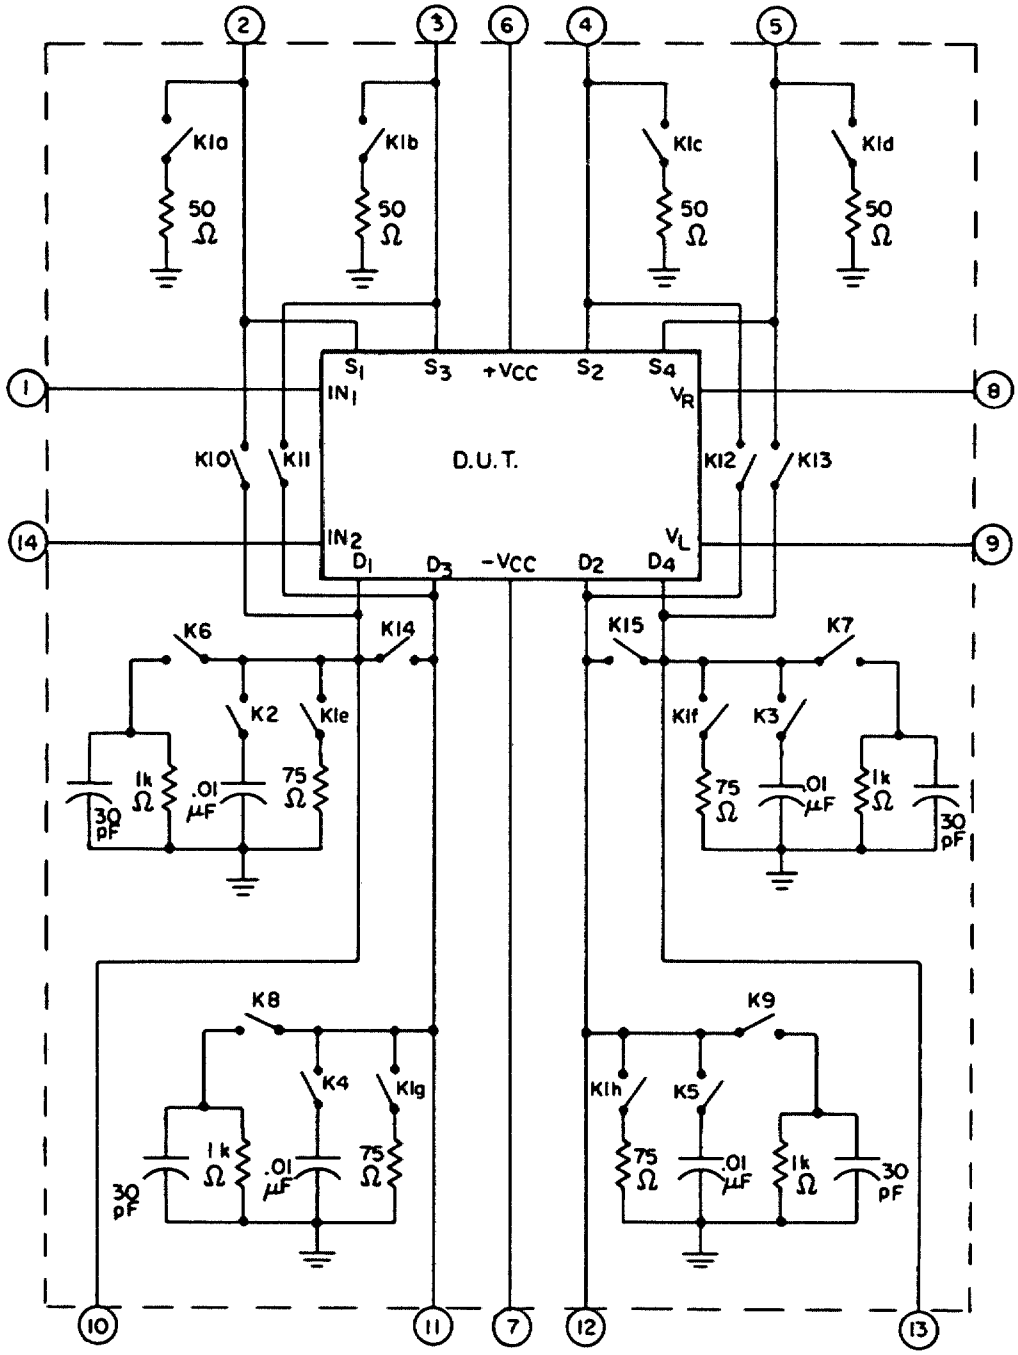


FIGURE 7. Test circuit (static and dynamic tests) for device types 03, 04, 07 and 08.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.


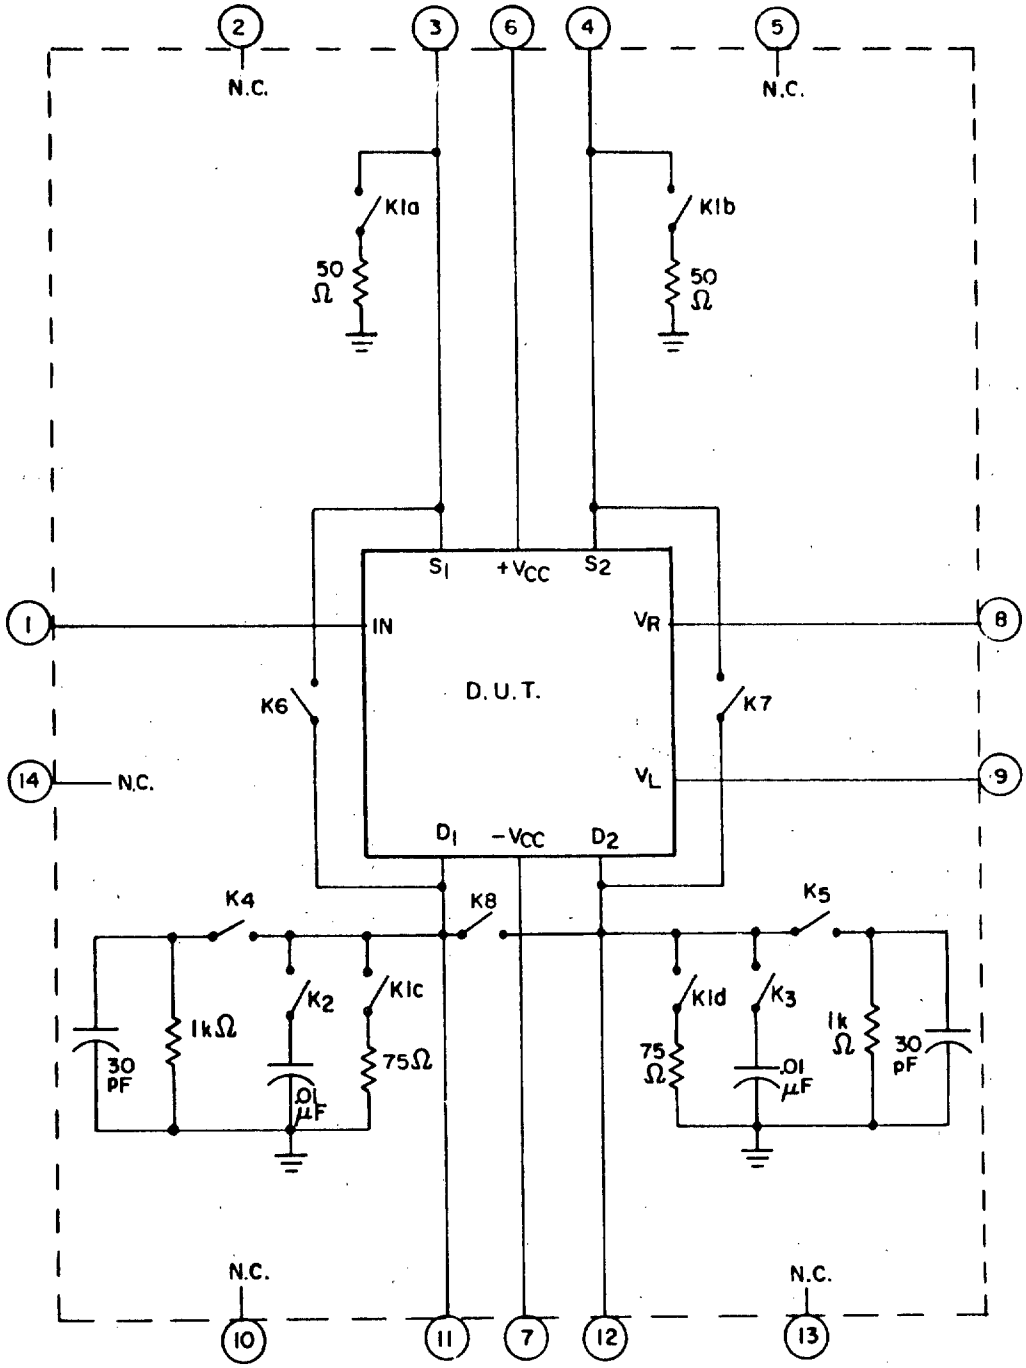


FIGURE 8. Test circuit (static and dynamic tests) for device types 05 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

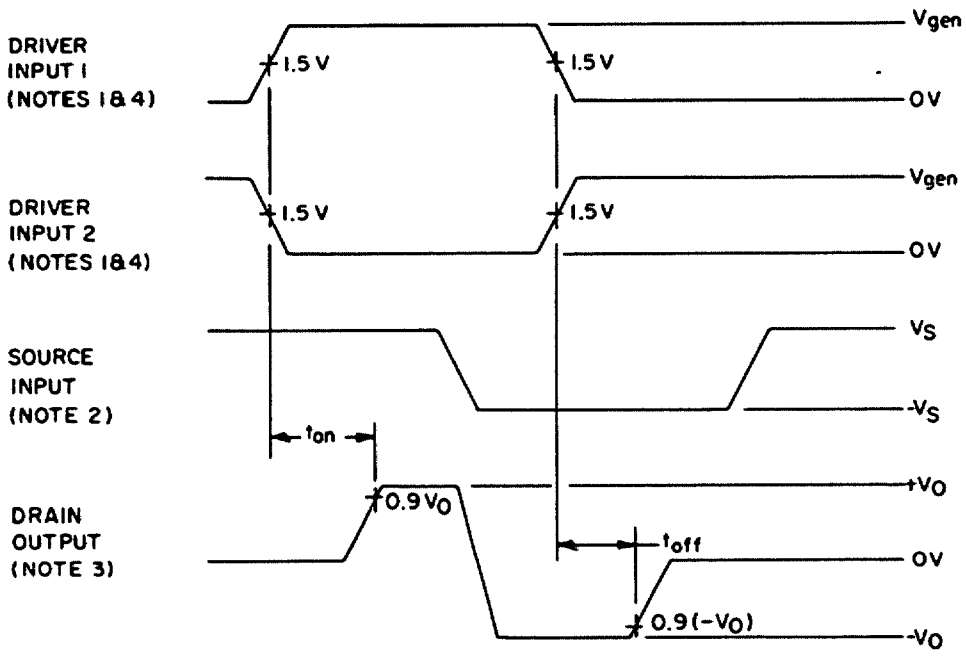

NOTES:
1. The driver pulse generator shall have the following characteristics:

   a. V_{gen} = 0 V to 3.0 V.
   b. Rise time (0.3 V to 0.7 V) $\leq$ 10 ns.
   c. Fall time (2.7 V to 0.3 V) $\leq$ 10 ns.

2. The source pulse generator shall have the following characteristics:

   a. V_{gen} = -7.5 V to +7.5 V square wave (device types 01, 03, 05 and 07).
   b. V_{gen} = -10.0 V to +10.0 V square wave (device types 02, 04, 06 and 08).

FIGURE 9. Input-output waveforms for time delay tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.


3. For device types 01, 03, 05 and 07:

   a. V_{source} = +7.5 V for T_{on}.
   b. V_{source} = -7.5 V for T_{off}.
   c. V_o = +7.2 V for T_{on} (-55°C, 25°C).
   d. V_o = +7.0 V for T_{on} (125°C).
   e. V_o = -7.2 V for T_{off} (-55°C, 25°C).
   f. V_o = -7.0 V for T_{off} (125°C).

   For device types 02, 04, 06 and 08:

   a. V_{source} = +10.0 V for T_{on}.
   b. V_{source} = -10.0 V for T_{off}.
   c. V_o = +9.2 V for T_{on} (-55°C, 25°C).
   d. V_o = +8.6 V for T_{on} (125°C).
   e. V_o = -9.2 V for T_{off} (-55°C, 25°C).
   f. V_o = -8.6 V for T_{off} (125°C).

4. Driver input 1 shall be used to test all switches for device types 03 and 04, switch 1 for device types 05 and 06 and switches 1 and 2 for device types 07 and 08. Driver input 2 shall be used to test all switches for device types 01 and 02, switch 2 for device types 05 and 06 and switches 3 and 4 for device types 07 and 08.

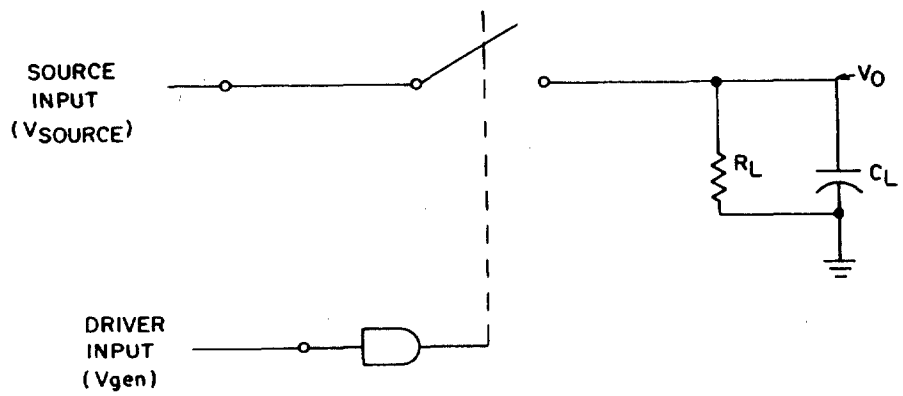

R_L = 1 kΩ ±5%.
C_L = 100 pf ±5% (C_L includes associated test system capacitance)

FIGURE 9. Input-output waveforms for time delay tests - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

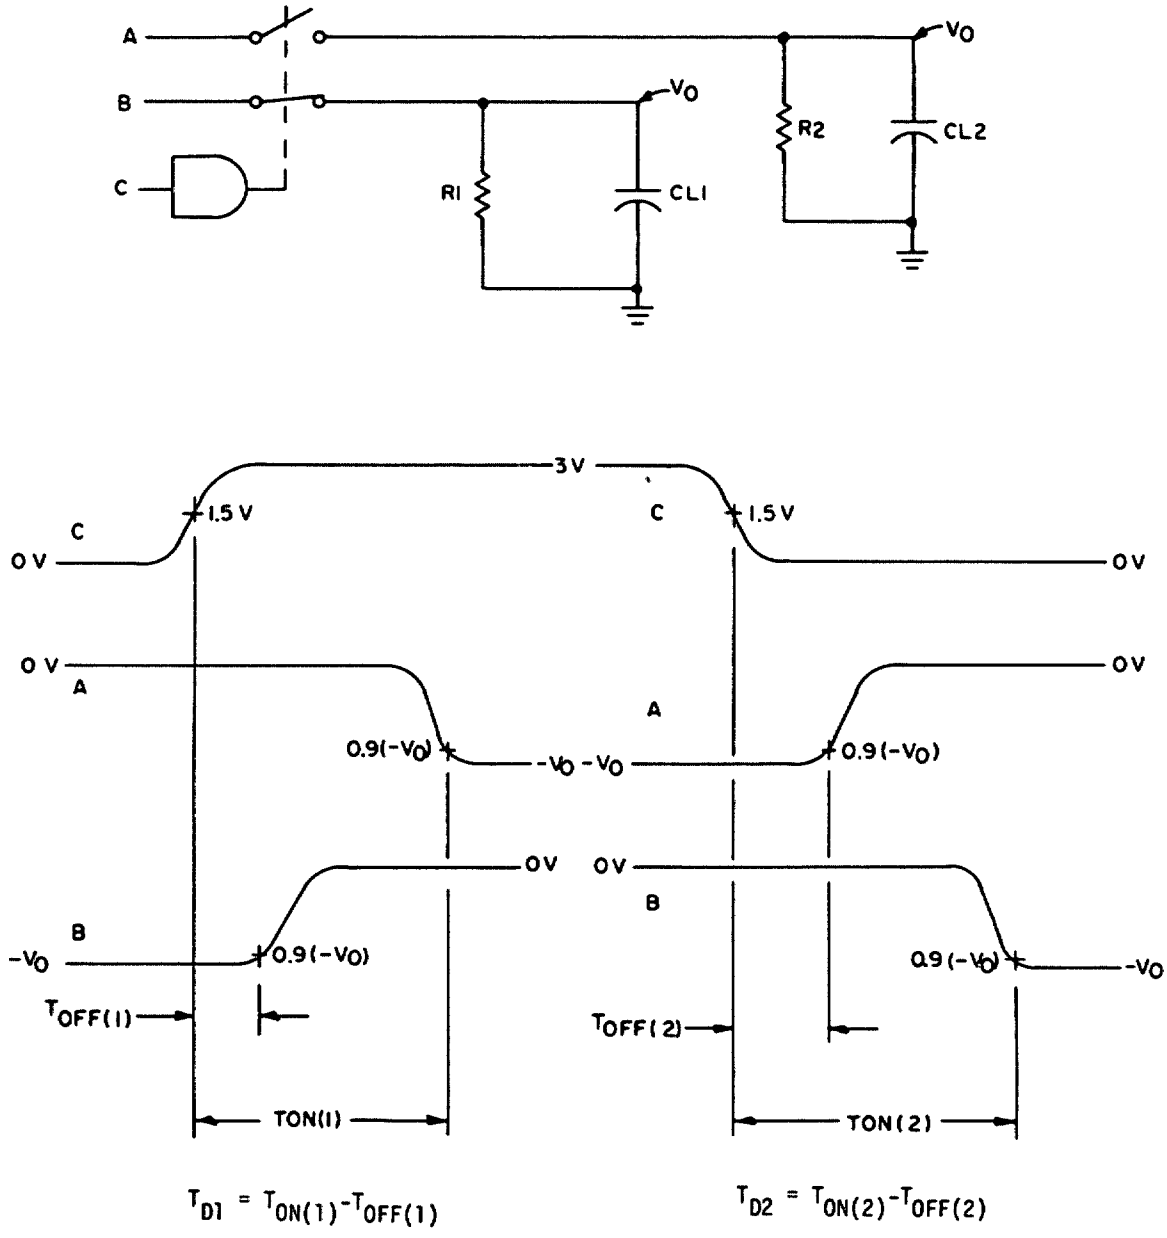


FIGURE 10. Break-before-make test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

NOTES:
1. R1 = R2 = 1 kΩ ±5%.
   CL1 = CL2 = 100 pf matched to 5%.
2. Both TD1 and TD2 shall be measured. These measurements shall apply only to device types 05, 06, 07 and 08. See 3.4.1 for switch conditions.
3. V_{source} = -7.5 V (for T_{on} and T_{off} - Device types 05 and 07).
   V_{source} = -10.0 V (for T_{on} and T_{off} - Device types 06 and 08).
4. V_o = -7.2 V (device types 05 and 07).
   V_o = -9.2 V (device types 06 and 08).
5. The driver pulse generator shall have the following characteristics:

   a. V_{gen} = 0 V to 3.0 V.
   b. Rise time (0.3 V to 2.7 V) ≤ 10 ns.
   c. Fall time (2.7 V to 0.3 V) ≤ 10 ns.

6. Break-before-make performance: The device types 05, 06, 07 and 08 all operate in the break-before-make mode at room temperature (25° ±3°C) and higher (to 125° ±3°C). Break-before-make performance is defined as a difference between T_{on} and T_{off} of ≤ 5 ns when two switches driven by a common driver are switching a common analog signal. T_{on} and T_{off} are measured as shown in figure 10. Below room temperature, it is possible that under negative analog voltage conditions, break-before-make action may not occur.

FIGURE 10. Break-before-make test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25°C	R_{DS}		1	0.8 V		-10 mA			15 V	-15 V	GND	5.0 V		-7.5 V				None	3	-7.8		V 2/
	R_{DS}		2				-10 mA		15 V	-15 V					-7.5 V		0.8 V		4	-7.8		V 2/
	$I_{S(OFF)}$		3	2.0 V		10 V			10 V	-20 V				-10 V					3	-1	1	nA
			4				10 V		10 V	-20 V					-10 V		2.0 V		4	-1	1	nA
			5	2.0 V		7.5 V			15 V	-15 V				-7.5 V					3	-1	1	nA
			6				7.5 V		15 V	-15 V					-7.5 V		2.0 V		4	-1	1	nA
	$I_{D(OFF)}$		7	2.0 V		-10 V			10 V	-20 V				10 V					11	-1	1	nA
			8				-10 V		10 V	-20 V					10 V		2.0 V		12	-1	1	nA
			9	2.0 V		-7.5 V			15 V	-15 V				7.5 V					11	-1	1	nA
			10				-7.5 V		15 V	-15 V					7.5 V		2.0 V		12	-1	1	nA
	$I_{D(ON)}$		11	0.8 V		-7.5 V			15 V	-15 V								K6	3	-2	2	nA
	$+I_{S(ON)}$		12				-7.5 V										0.8 V	K7	4	-2	2	nA
	I_{IL}		13	GND														None	1	-250	-.1	µA
	I_{IL}		14														GND		14	-250	-.1	µA
	I_{IH}		15	5.0 V															1	-1	10	µA
	I_{IH}		16														5.0 V		14	-1	10	µA
	$+I_{CC}$		17	GND													GND		6		1.5	mA
	$+I_{CC}$		18	5.0 V													5.0 V		6		1.5	
	$-I_{CC}$		19	GND													GND		7	-5		
	$-I_{CC}$		20	5.0 V													5.0 V		7	-5		
	I_L		21	GND													GND		9		4.5	
	I_L		22	5.0 V													5.0 V		9		4.5	
	I_R		23	GND													GND		8	-2.2		
	I_R		24	5.0 V													5.0 V		8	-2.2		
2 T_A=125°C	R_{DS}		25	0.8 V		-10 mA								-7.5 V					3	-8.1		V 2/
	R_{DS}		26				-10 mA								-7.5 V		0.8 V		4	-8.1		V 2/

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test No.	Adapter pin number 1/ 1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
2 T_A=125° C	$I_{S(OFF)}$		27	2.0 V		10 V			10 V	-20 V	GND	5.0 V		-10 V				None	3	-100	100	nA
			28				10 V		10 V	-20 V					-10 V		2.0 V		4			
			29	2.0 V		7.5 V			15 V	-15 V				7.5 V					3			
			30				7.5 V		15 V	-15 V					7.5 V		2.0 V		4			
	$I_{D(OFF)}$		31	2.0 V		-10 V			10 V	-20 V				10 V					11			
			32				-10 V		10 V	-20 V					10 V		2.0 V		12			
			33	2.0 V		-7.5 V			15 V	-15 V				7.5 V					11			
			34				-7.5 V		15 V	-15 V					7.5 V		2.0 V		12			
	$I_{D(ON)}$		35	0.8 V		-7.5 V			15 V	-15 V								K6	3	-200	200	
	$+I_{S(ON)}$		36				-7.5 V										0.8 V	K7	4	-200	200	
	I_{IL}		37	GND														None	1	-250	-.1	μA
	I_{IL}		38														GND		14	-250	-.1	μA
	I_{IH}		39	5.0 V															1	-2	20	μA
	I_{IH}		40														5.0 V		14	-2	20	μA
	$+I_{CC}$		41	GND													GND		6		1.5	mA
	$+I_{CC}$		42	5.0 V													5.0 V		6		1.5	mA
	$-I_{CC}$		43	GND													GND		7	-5		mA
	$-I_{CC}$		44	5.0 V													5.0 V		7	-5		mA
	I_L		45	GND													GND		9		4.5	mA
	I_L		46	5.0 V													5.0 V		9		4.5	mA
	I_R		47	GND													GND		8	-2.2		mA
	I_R		48	5.0 V													5.0 V		8	-2.2		mA
3 T_A=-55° C	R_{DS}		49	0.8 V		-10 mA			15 V	-15 V				-7.5 V					3	-7.8		V 2/
	R_{DS}		50				-10 mA		15 V	-15 V					-7.5 V		0.8 V		4	-7.8		V 2/
	$I_{S(OFF)}$		51	2.0 V		10 V			10 V	-20 V				-10 V					3	-100	100	nA
			52				10 V		10 V	-20 V					-10 V		2.0 V		4			
			53	2.0 V		7.5 V			15 V	-15 V				-7.5 V					3			
			54				7.5 V		15 V	-15 V					-7.5 V		2.0 V		4			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
3 T_A = -55°C	$I_{D(OFF)}$		55	2.0 V		-10 V			10 V	-20 V	GND	5.0 V		10 V				None	11	-100	100	nA
			56				-10 V		10 V	-20 V					10 V		2.0 V		12	-100	100	
			57	2.0 V		-7.5 V			15 V	-15 V				7.5 V					11	-100	100	
			58				-7.5 V		15 V	-15 V					7.5 V		2.0 V		12	-100	100	
	$I_{D(ON)}$		59	0.8 V		-7.5 V			15 V	-15 V								K6	3	-200	200	
	$+I_{S(ON)}$		60				-7.5 V		15 V	-15 V							0.8 V	K7	4	-200	200	
	I_{IL}		61	GND					15 V	-15 V								None	1	-250	-.1	µA
	I_{IL}		62														GND		14	-250	-.1	µA
	I_{IH}		63	5.0 V															1	-1	10	µA
	I_{IH}		64														5.0 V		14	-1	10	µA
	$+I_{CC}$		65	GND													GND		6		2.5	mA
	$+I_{CC}$		66	5.0 V													5.0 V		6		2.5	
	$-I_{CC}$		67	GND													GND		7	-8		
	$-I_{CC}$		68	5.0 V													5.0 V		7	-8		
	I_L		69	GND													GND		9		7	
	I_L		70	5.0 V													5.0 V		9		7	
	I_R		71	GND													GND		8	-2		
	I_R		72	5.0 V													5.0 V		8	-2		
4 T_A = 25°C	V_{CTE}		73	IN 3/		GND												K2	11		20	mV_{p-p}
	V_{CTE}		74				GND										IN 3/	K3	12		20	mV_{p-p}
7 T_A = 25°C	V_{CT} 4/		75	0.8 V		IN 4/ dB_{CT} = -20 log (V_{OUT}/V_{IN})			15 V	-15 V	GND	5.0 V					2.0 V	K1	12	60	1.0	mV_{p-p} dB
	V_{ISO}		76	2.0 V		IN 4/			15 V	-15 V	GND	5.0 V						K1	11		3.16	mV_{p-p}
	V_{ISO}		77				IN 4/ dB_{ISO} = -20 log (V_{OUT}/V_{IN})		15 V	-15 V	GND	5.0 V						K1	12	50	3.16	mV_{p-p} dB
9 T_A = 25°C	t_{ON}		78	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	1 to 11		150	ns
	t_{ON}		79				IN								OUT		IN	K5	14 to 12		150	ns
	t_{OFF}		80	IN		IN								OUT				K4	1 to 11		130	ns
	t_{OFF}		81				IN								OUT		IN	K5	14 to 12		130	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
10 T_A=+125°C	t_{ON}		82	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	1 to 11		300	ns
	t_{ON}		83				IN								OUT		IN	K5	14 to 12		300	
	t_{OFF}		84	IN		IN								OUT				K4	1 to 11		200	
	t_{OFF}		85				IN								OUT		IN	K5	14 to 12		200	
11 T_A=-55°C	t_{ON}		86	IN		IN								OUT				K4	1 to 11		150	
	t_{ON}		87				IN								OUT		IN	K5	14 to 12		150	
	t_{OFF}		88	IN		IN								OUT				K4	1 to 11		130	
	t_{OFF}		89				IN								OUT		IN	K5	14 to 12		130	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. *Group A inspection for device type 02.*

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A = 25 °C	R_{DS}		1	0.8 V		-10 mA			15 V	-15 V	GND	5.0 V		-10 V				None	3	-10.75		V 2/
	R_{DS}		2				-10 mA		15 V	-15 V					-10 V		0.8 V		4	-10.75		V 2/
	$I_{S(OFF)}$		3	2.0 V		10 V			10 V	-20 V				-10 V					3	-1	1	nA
			4				10 V		10 V	-20 V					-10 V		2.0 V		4			
			5	2.0 V		10 V			15 V	-15 V				-10 V					3			
			6				10 V		15 V	-15 V					-10 V		2.0 V		4			
	$I_{D(OFF)}$		7	2.0 V		-10 V			10 V	-20 V				10 V					11			
			8				-10 V		10 V	-20 V					10 V		2.0 V		12			
			9	2.0 V		-10 V			15 V	-15 V				10 V					11			
			10				-10 V		15 V	-15 V					10 V		2.0 V		12			
	$I_{D(ON)+}$		11	0.8 V		-10 V			15 V	-15 V								K6	3	-2	2	
	$I_{S(ON)}$		12				-10 V										0.8 V	K7	4	-2	2	
	I_{IL}		13	GND														None	1	-250	-.1	µA
	I_{IL}		14														GND		14	-250	-.1	µA
	I_{IH}		15	5.0 V															1	-1	10	µA
	I_{IH}		16														5.0 V		14	-1	10	µA
	$+I_{CC}$		17	GND													GND		8		1.5	mA
	$+I_{CC}$		18	5.0 V													5.0 V		8		1.5	
	$-I_{CC}$		19	GND													GND		7	-5		
	$-I_{CC}$		20	5.0 V													5.0 V		7	-5		
	I_L		21	GND													GND		9		4.5	
	I_L		22	5.0 V													5.0 V		9		4.5	
	I_R		23	GND													GND		8	-2.2		
	I_R		24	5.0 V													5.0 V		8	-2.2		
2 T_A = 125 °C	R_{DS}		25	0.8 V		-10 mA			15 V	-15 V				-10 V					3	-11.50		V 2/
	R_{DS}		26				-10 mA		15 V	-15 V					- 10 V		0.8 V		4	-11.50		V 2/
	$I_{S(OFF)}$		27	2.0 V		10 V			10 V	-20 V				-10 V					3	-100	100	nA
	$I_{S(OFF)}$		28				10 V		10 V	-20 V					-10 V		2.0 V		4	-100	100	nA
	$I_{S(OFF)}$		29	2.0 V		10 V			15 V	-15 V				-10 V					3	-100	100	nA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
				IN_1	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	V_R	V_L	NC	D_1	D_2	NC	IN_2					
2 T_A= 125° C	$I_{S(OFF)}$		30				10 V		15 V	-15 V	GND	5.0 V			-10 V		2.0 V	None	4	-100	100	nA
	$I_{D(OFF)}$		31	2.0 V		-10 V			10 V	-20 V				10 V					11			
			32				-10 V		10 V	-20 V					10 V		2.0 V		12			
			33	2.0 V		-10 V			15 V	-15 V				10 V					11			
			34				-10 V		15 V	-15 V					10 V		2.0 V		12			
	$I_{D(ON)+}$		35	0.8 V		-10 V			15 V	-15 V								K6	3	-200	200	
	$I_{S(ON)}$		36				-10 V										0.8 V	K7	4	-200	200	
	I_{IL}		37	GND														None	1	-250	-.1	μA
	I_{IL}		38														GND		14	-250	-.1	μA
	I_{IH}		39	5.0 V															1	-2	20	μA
	I_{IH}		40														5.0 V		14	-2	20	μA
	$+I_{CC}$		41	GND													GND		6		1.5	mA
	$+I_{CC}$		42	5.0 V													5.0 V		6		1.5	mA
	$-I_{CC}$		43	GND													GND		7	-5		mA
	$-I_{CC}$		44	5.0 V													5.0 V		7	-5		mA
	I_L		45	GND													GND		9		4.5	mA
	I_L		46	5.0 V													5.0 V		9		4.5	mA
	I_R		47	GND													GND		8	-2.2		mA
	I_R		48	5.0 V													5.0 V		8	-2.2		mA
3 T_A= -55° C	R_{DS}	R	49	0.8 V		-10 mA			15 V	-15 V				-10 V					3	-10.75		V 2/
	R_{DS}		50				-10 mA		15 V	-15 V					-10 V		0.8 V		4	-10.75		V 2/
	$I_{S(OFF)}$		51	2.0 V		10 V			10 V	-20 V				-10 V					3	-100	100	nA
			52				10 V		10 V	-20 V					-10 V		2.0 V		4			
			53	2.0 V		10 V			15 V	-15 V				-10 V					3			
			54				10 V		15 V	-15 V					-10 V		2.0 V		4			
	$I_{D(OFF)}$		55	2.0 V		-10 V			10 V	-20 V				10 V					11			
			56				-10 V		10 V	-20 V					10 V		2.0 V		12			
			57	2.0 V		-10 V			15 V	-15 V				10 V					11			
			58				-10 V		15 V	-15 V					10 V		2.0 V		12			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type '02 - Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
3 T_A=-55°C	$I_{D(ON)+}$		59	0.8 V		-10 V			15 V	-15 V	GND	5.0 V						K6	3	-200	200	nA
	$I_{D(ON)+}$		60				-10 V		15 V	-15 V							0.8 V	K7	4	-200	200	nA
	I_{IL}		61	GND														None	1	-250	-.1	µA
	I_{IL}		62														GND		14	-250	-.1	µA
	I_{IH}		63	5.0 V															1	-1	10	µA
	I_{IH}		64														5.0 V		14	-1	10	µA
	$+I_{CC}$		65	GND													GND		8		2.5	mA
	$+I_{CC}$		66	5.0 V													5.0 V		6		2.5	
	$-I_{CC}$		67	GND													GND		7	-8		
	$-I_{CC}$		68	5.0 V													5.0 V		7	-8		
	I_L		69	GND													GND		9		7	
	I_L		70	5.0 V													5.0 V		9		7	
	I_R		71	GND													GND		8	-2		
	I_R		72	5.0 V													5.0 V		8	-2		
4 T_A=25°C	V_{CTE}		73	IN 3/		GND												K2	11		20	mV_{p-p}
	V_{CTE}		74				GND										IN 3/	K3	12		20	mV_{p-p}
7 T_A=25°C	V_{CT} 7/		75	0.8 V		IN 4/											2.0 V	K1	12		1.0	mV_{p-p}
							dB_{CT} = -20 log (V_{OUT}/V_{IN})													60		dB
	V_{ISO}		76	2.0 V		IN 4/			15 V	-15 V	GND	5.0 V						K1	11		3.16	mV_{p-p}
	V_{ISO}		77				IN 4/		15 V	-15 V	GND	5.0 V						K1	12		3.16	mV_{p-p}
							dB_{ISO} = -20 log (V_{OUT}/V_{IN})													50		dB
9 T_A=25°C	t_{ON}		78	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	1 to 11		250	ns
	t_{ON}		79				IN								OUT		IN	K5	14 to 12		250	
	t_{OFF}		80	IN		IN								OUT				K4	1 to 11		130	
	t_{OFF}		81				IN								OUT		IN	K5	14 to 12		130	
10 T_A=125°C	t_{ON}		82	IN		IN								OUT				K4	1 to 11		350	
	t_{ON}		83				IN								OUT		IN	K5	14 to 12		350	
	t_{OFF}		84	IN		IN								OUT				K4	1 to 11		200	
	t_{OFF}		85				IN								OUT		IN	K5	14 to 12		200	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device 02 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
				IN_1	NC	S_1	S_2	NC	$+V_{CC}$	$-V_{CC}$	V_R	V_L	NC	D_1	D_2	NC	IN_2					
11 T_A=-55° C	t_{ON}		86	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	1 to 11		250	ns
	t_{ON}		87				IN		15 V	-15 V	GND	5.0 V			OUT		IN	K5	14 to 12		250	ns
	t_{OFF}		88	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	1 to 11		130	ns
	t_{OFF}		89				IN		15 V	-15 V	GND	5.0 V			OUT		IN	K5	14 to 12		130	ns

See notes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Max	Limits Min	Unit
1 T_A=25°C	R_{DS}		1	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-7.5 V					None	2	-7.8		V 2/
			2	2.0 V		-10 mA								-7.5 V					3	-7.8		V 2/
			3				-10 mA								-7.5 V		2.0 V		4	-7.8		V 2/
			4					-10 mA								-7.5 V	2.0 V		5	-7.8		V 2/
	$I_{S(OFF)}$		5	0.8 V	10 V				10 V	-20 V			-10 V						2	-1	1	nA
			6	0.8 V		10 V								-10 V					3			
			7				10 V								-10 V		0.8 V		4			
			8					10 V								-10 V	0.8 V		5			
			9	0.8 V	7.5 V				15 V	-15 V			-7.5 V						2			
			10	0.8 V		7.5 V								-7.5 V					3			
			11				7.5 V								-7.5 V		0.8 V		4			
			12					7.5 V								-7.5 V	0.8 V		5			
	$I_{D(OFF)}$		13	0.8 V	-10 V				10 V	-20 V			10 V						10			
			14	0.8 V		-10 V								10 V					11			
			15				-10 V								10 V		0.8 V		12			
			16					-10 V								10 V	0.8 V		13			
			17	0.8 V	-7.5 V				15 V	-15 V			7.5 V						10			
			18	0.8 V		-7.5 V								7.5 V					11			
			19				-7.5 V								7.5 V		0.8 V		12			
			20					-7.5 V								7.5 V	0.8 V		13			
	$I_{D(ON)+}$		21	2.0 V	-7.5 V													K10	2	-2	2	
	$I_{S(ON)}$		22	2.0 V		-7.5 V												K11	3	-2	2	
			23				-7.5 V										2.0 V	K12	4	-2	2	
			24					-7.5 V									2.0 V	K13	5	-2	2	
	I_{IL}		25	GND														None	1	-250	-.1	µA
	I_{IL}		26														GND		14	-250	-.1	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN1	2 S1	3 S3	4 S2	5 S4	6 +VCC	7 -VCC	8 VR	9 VL	10 D1	11 D3	12 D2	13 D4	14 IN2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25°C	I_{IH}		27	5.0 V					15 V	-15 V	GND	5.0 V						None	1	-1	10	µA
	I_{IH}		28														5.0 V		14	-1	10	µA
	$+I_{CC}$		29	GND													GND		6		3	mA
	$+I_{CC}$		30	5.0 V													5.0 V		6		0.1	
	$-I_{CC}$		31	GND													GND		7	-5.5		
	$-I_{CC}$		32	5.0 V													5.0 V		7	-4		
	I_L		33	GND													GND		9		4.5	
	I_L		34	5.0 V													5.0 V		9		4.5	
	I_R		35	GND													GND		8	-2.2		
	I_R		36	5.0 V													5.0 V		8	-2.2		
2 T_A=125°C	R_{DS}		37	2.0 V	-10 mA								-7.5 V						2	-8.1		V 2/
			38	2.0 V		-10 mA								-7.5 V					3	-8.1		V 2/
			39				-10 mA								-7.5 V		2.0 V		4	-8.1		V 2/
			40					-10 mA								-7.5 V	2.0 V		5	-8.1		V 2/
	$I_{S(OFF)}$		41	0.8 V	10 V				10 V	-20 V			-10 V						2	-100	100	nA
			42	0.8 V		10 V								-10 V					3			
			43				10 V								-10 V		0.8 V		4			
			44					10 V								-10 V	0.8 V		5			
			45	0.8 V	7.5 V				15 V	-15 V			-7.5 V						2			
			46	0.8 V		7.5 V								-7.5 V					3			
			47				7.5 V								-7.5 V		0.8 V		4			
			48					7.5 V								-7.5 V	0.8 V		5			
	$I_{D(OFF)}$		49	0.8 V	-10 V				10 V	-20 V			10 V						10			
			50	0.8 V		-10 V								10 V					11			
			51				-10 V								10 V		0.8 V		12			
			52					-10 V								10 V	0.8 V		13			
			53	0.8 V	-7.5 V				15 V	-15 V			7.5 V						10			
			54	0.8 V		-7.5 V								7.5 V					11			
			55				-7.5 V								7.5 V		0.8 V		12			
			56					-7.5 V								7.5 V	0.8 V		13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
2 T_A= 125° C	$I_{D(ON)+}$		57	2.0 V	-7.5 V				15 V	-15 V	GND	5.0 V						K10	2	-200	200	nA
	$I_{S(ON)}$		58	2.0 V		-7.5 V												K11	3	-200	200	nA
			59				-7.5 V										2.0 V	K12	4	-200	200	nA
			60					-7.5 V									2.0 V	K13	5	-200	200	nA
	I_{IL}		61	GND														None	1	-250	-.1	μA
	I_{IL}		62														GND		14	-250	-.1	μA
	I_{IH}		63	5.0 V															1	-2	20	μA
	I_{IH}		64														5.0 V		14	-2	20	μA
	$+I_{CC}$		65	GND													GND		6		3	mA
	$+I_{CC}$		66	5.0 V													5.0 V		6		0.1	mA
	$-I_{CC}$		67	GND													GND		7	-5.5		mA
	$-I_{CC}$		68	5.0 V													5.0 V		7	-4		mA
	I_L		69	GND													GND		9		4.5	mA
	I_L		70	5.0 V													5.0 V		9		4.5	mA
	I_R		71	GND													GND		8	-2.2		mA
	I_R		72	5.0 V													5.0 V		8	-2.2		mA
3 T_A= -55° C	R_{DS}		73	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-7.5 V						2	-7.8		V 2/
			74	2.0 V		-10 mA								-7.5 V					3	-7.8		V 2/
			75				-10 mA								-7.5 V		2.0 V		4	-7.8		V 2/
			76					-10 mA								-7.5 V	2.0 V		5	-7.8		V 2/
	$I_{S(OFF)}$		77	0.8 V	10 V				10 V	-20 V			-10 V						2	-100	100	nA
			78	0.8 V		10 V								-10 V					3			
			79				10 V								-10 V		0.8 V		4			
			80					10 V								-10 V	0.8 V		5			
			81	0.8 V	7.5 V				15 V	-15 V			-7.5 V						2			
			82	0.8 V		7.5 V								-7.5 V					3			
			83				7.5 V								-7.5 V		0.8 V		4			
			84					7.5 V								-7.5 V	0.8 V		5			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
3 T_A= -55° C	$I_{D(OFF)}$		85	0.8 V	-10 V				10 V	-20 V	GND	5.0 V	10 V					None	10	-100	100	nA
			86	0.8 V		-10 V								10 V					11			
			87				-10 V								10 V		0.8 V		12			
			88					-10 V								10 V	0.8 V		13			
			89	0.8 V	-7.5 V				15 V	-15 V			7.5 V						10			
			90	0.8 V		-7.5 V								7.5 V					11			
			91				-7.5 V								7.5 V		0.8 V		12			
			92					-7.5 V								7.5 V	0.8 V		13			
	$I_{D(ON)+}$ $I_{S(ON)}$		93	2.0 V	-7.5 V													K10	2	-200	200	
			94	2.0 V		-7.5 V												K11	3			
			95				-7.5 V										2.0 V	K12	4			
			96					-7.5 V									2.0 V	K13	5			
	I_{IL}		97	GND														None	1	-250	-.1	μA
	I_{IL}		98														GND		14	-250	-.1	μA
	I_{IH}		99	5.0 V															1	-1	10	μA
	I_{IH}		100														5.0 V		14	-1	10	μA
	$+I_{CC}$		101	GND													GND		6		5	mA
	$+I_{CC}$		102	5.0 V													5.0 V		6		1.7	mA
	$-I_{CC}$		103	GND													GND		7	-8.8		mA
	$-I_{CC}$		104	5.0 V													5.0 V		7	-6.4		mA
	I_L		105	GND													GND		9		7	mA
	I_L		106	5.0 V													5.0 V		9		7	mA
	I_R		107	GND													GND		8	-2		mA
	I_R		108	5.0 V													5.0 V		8	-2		mA
4 T_A= 25° C	V_{CTE}		109	IN 3/	GND													K2	10		20	mV_{p-p}
			110	IN 3/		GND												K4	11		20	
			111				GND										IN 3/	K5	12		20	
			112					GND									IN 3/	K3	13		20	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2,	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
7 T_A=25°C	V_{CT} 7/		113	2.0 V	5/	5/			15 V	-15 V	GND	5.0 V						K1	12 or 13		1.0	mV_{p-p}
	V_{CT} 7/		114				6/	6/	15 V	-15 V	GND	5.0 V					2.0 V	K1	10 or 11		1.0	mV_{p-p}
				dB_{CT} = -20 log (V_{OUT}/V_{IN})																60		dB
	V_{ISO}		115	0.8 V	IN 4/				15 V	-15 V	GND	5.0 V						K1	10		3.16	mV_{p-p}
			116	0.8 V		IN 4/												K1	11		3.16	
			117				IN 4/										0.8 V	K1	12		3.16	
			118					IN 4/									0.8 V	K1	13		3.16	
								dB_{ISO} = -20 log(V_{OUT}/V_{IN})												50		dB
9 T_A=25°C	t_{ON}		119	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		150	ns
			120	IN		IN								OUT				K8	3 to 11		150	
			121				IN								OUT		IN	K9	4 to 12		150	
			122					IN								OUT	IN	K7	5 to 13		150	
	t_{OFF}		123	IN	IN								OUT					K6	2 to 10		130	
			124	IN		IN								OUT				K8	3 to 11		130	
			125				IN								OUT		IN	K9	4 to 12		130	
			126					IN								OUT	IN	K7	5 to 13		130	
10 T_A=125°C	t_{ON}		127	IN	IN								OUT					K6	2 to 10		300	
			128	IN		IN								OUT				K8	3 to 11		300	
			129				IN								OUT		IN	K9	4 to 12		300	
			130					IN								OUT	IN	K7	5 to 13		300	
	t_{OFF}		131	IN	IN								OUT					K6	2 to 10		200	
			132	IN		IN								OUT				K8	3 to 11		200	
			133				IN								OUT		IN	K9	4 to 12		200	
			134					IN								OUT	IN	K7	5 to 13		200	
11 T_A=-55°C	t_{ON}		135	IN	IN	IN							OUT					K6	2 to 10		150	
			136	IN		IN								OUT				K8	3 to 11		150	
			137				IN								OUT		IN	K9	4 to 12		150	
			138					IN								OUT	IN	K7	5 to 13		150	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
11 T_A= -55° C	t_{OFF}		139	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		130	ns
			140	IN		IN								OUT				K8	3 to 11		130	ns
			141				IN								OUT		IN	K9	4 to 12		130	ns
			142					IN								OUT	IN	K7	5 to 13		130	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25°C	R_{DS}		1	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-10 V					None	2	-10.75		V 2/
			2	2.0 V		-10 mA								-10 V					3	-10.75		V 2/
			3				-10 mA								-10 V		2.0 V		4	-10.75		V 2/
			4					-10 mA								-10 V	2.0 V		5	-10.75		V 2/
	$I_{S(OFF)}$		5	0.8 V	10 V				10 V	-20 V			-10 V						2	-1	1	nA
			6	0.8 V		10 V								-10 V					3	-1	1	
			7				10 V								-10 V		0.8 V		4	-1	1	
			8					10 V								-10 V	0.8 V		5	-1	1	
			9	0.8 V	10 V				15 V	-15 V			-10 V						2	-1	1	
			10	0.8 V		10 V								-10 V					3	-1	1	
			11				10 V								-10 V		0.8 V		4	-1	1	
			12					10 V								-10 V	0.8 V		5	-1	1	
	$I_{D(OFF)}$		13	0.8 V	-10 V				10 V	-20 V			10 V						10	-1	1	
			14	0.8 V		-10 V								10 V					11	-1	1	
			15				-10 V								10 V		0.8 V		12	-1	1	
			16					-10 V								10 V	0.8 V		13	-1	1	
			17	0.8 V	-10 V				15 V	-15 V			10 V						10	-1	1	
			18	0.8 V		-10 V								10 V					11	-1	1	
			19				-10 V								10 V		0.8 V		12	-1	1	
			20					-10 V								10 V	0.8 V		13	-1	1	
	$I_{D(ON)}$+ $I_{S(ON)}$		21	2.0 V	-10 V													K10	2	-2	2	
			22	2.0 V		-10 V												K11	3	-2	2	
			23				-10 V										2.0 V	K12	4	-2	2	
			24					-10 V									2.0 V	K13	5	-2	2	
	I_{IL}		25	GND														None	1	-250	-.1	µA
	I_{IL}		26														GND		14	-250	-.1	µA
	I_{IH}		27	5.0 V															1	-1	10	µA
	I_{IH}		28														5.0 V		14	-1	10	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25° C	$+I_{CC}$		29	GND					15 V	-15 V	GND	5.0 V					GND	None	6		3	mA
	$+I_{CC}$		30	5.0 V													5.0 V		6		0.1	mA
	$-I_{CC}$		31	GND													GND		7	-5.5		mA
	$-I_{CC}$		32	5.0 V													5.0 V		7	-4		mA
	I_L		33	GND													GND		9		4.5	mA
	I_L		34	5.0 V													5.0 V		9		4.5	mA
	I_R		35	GND													GND		8	-2.2		mA
	I_R		36	5.0 V													5.0 V		8	-2.2		mA
2 T_A=125° C	R_{DS}		37	2.0 V	-10 mA								-10 V						2	-11.50		V 2/
			38	2.0 V		-10 mA								-10 V					3	-11.50		V 2/
			39				-10 mA								-10 V		2.0 V		4	-11.50		V 2/
			40					-10 mA								-10 V	2.0 V		5	-11.50		V 2/
	$I_{S(OFF)}$		41	0.8 V	10 V				10 V	-20 V			-10 V						2	-100	100	nA
			42	0.8 V		10 V								-10 V					3			
			43				10 V								-10 V		0.8 V		4			
			44					10 V								-10 V	0.8 V		5			
			45	0.8 V	10 V				15 V	-15 V			-10 V						2			
			46	0.8 V		10 V								-10 V					3			
			47				10 V								-10 V		0.8 V		4			
			48					10 V								-10 V	0.8 V		5			
	$I_{D(OFF)}$		49	0.8 V	-10 V				10 V	-20 V			10 V						10			
			50	0.8 V		-10 V								10 V					11			
			51				-10 V								10 V		0.8 V		12			
			52					-10 V								10 V	0.8 V		13			
			53	0.8 V	-10 V				15 V	-15 V			10 V						10			
			54	0.8 V		-10 V								10 V					11			
			55				-10 V								10 V		0.8 V		12			
			56					-10 V								10 V	0.8 V		13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
2 T_A= 125°C	$I_{D(ON)+}$ $I_{S(ON)}$		57	8.0 V	-10 V				15 V	-15 V	GND	8.0 V						K10	2	-200	200	nA
			58	8.0 V		-10 V												K11	3			
			59				-10 V										8.0 V	K12	4			
			60					-10 V									8.0 V	K13	5			
	I_{IL}		61	GND														None	1	-250	-.1	µA
	I_{IL}		62														GND		14	-250	-.1	µA
	I_{IH}		63	8.0 V															1	-2	20	µA
	I_{IH}		64														8.0 V		14	-2	20	µA
	$+I_{CC}$		65	GND													GND		6		3	mA
	$+I_{CC}$		66	8.0 V													8.0 V		6		0.1	mA
	$-I_{CC}$		67	GND													GND		7	-5.5		mA
	$-I_{CC}$		68	8.0 V													8.0 V		7	-4		mA
	I_L		69	GND													GND		9		4.5	mA
	I_L		70	8.0 V													8.0 V		9		4.5	mA
	I_R		71	GND													GND		8	-2.2		mA
	I_R		72	8.0 V													8.0 V		8	-2.2		mA
3 T_A= -55°C	R_{DS}		73	8.0 V	-10 mA								-10 V						2	-10.75		V 2/
			74	8.0 V		-10 mA								-10 V					3	-10.75		V 2/
			75				-10 mA								-10 V		8.0 V		4	-10.75		V 2/
			76					-10 mA								-10 V	8.0 V		5	-10.75		V 2/
	$I_{S(OFF)}$		77	0.8 V	10 V				10 V	-20 V			-10 V						2	-100	100	nA
			78	0.8 V		10 V								-10 V					3			
			79				10 V								-10 V		0.8 V		4			
			80					10 V								-10 V	0.8 V		5			
			81	0.8 V	10 V				15 V	-15 V			-10 V						2			
			82	0.8 V		10 V								-10 V					3			
			83				10 V								-10 V		0.8 V		4			
			84					10 V								-10 V	0.8 V		5			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
3 T_A= -55° C	$I_{D(OFF)}$		85	0.8 V	-10 V				10 V	-20 V	GND	5.0 V	10 V					None	10	-100	100	nA
			86	0.8 V		-10 V								10 V					11			
			87				-10 V								10 V		0.8 V		12			
			88					-10 V								10 V	0.8 V		13			
			89	0.8 V	-10 V				15 V	-15 V			10 V						10			
			90	0.8 V		-10 V								10 V					11			
			91				-10 V								10 V		0.8 V		12			
			92					-10 V								10 V	0.8 V		13			
	$I_{D(ON)+}$		93	2.0 V	-10 V													K10	2	-200	200	
	$I_{S(ON)}$		94	2.0 V		-10 V												K11	3			
			95				-10 V										2.0 V	K12	4			
			96					-10 V									2.0 V	K13	5			
	I_{IL}		97	GND														None	1	-250	-.1	μA
	I_{IL}		98														GND		14	-250	-.1	μA
	I_{IH}		99	5.0 V															1		10	μA
	I_{IH}		100														5.0 V		14		10	μA
	$+I_{CC}$		101	GND													GND		6		5	mA
	$+I_{CC}$		102	5.0 V													5.0 V		6		1.7	mA
	$-I_{CC}$		103	GND													GND		7	-8.8		
	$-I_{CC}$		104	5.0 V													5.0 V		7	-6.4		
	I_L		105	GND													GND		9		7	
	I_L		106	5.0 V													5.0 V		9		7	
	I_R		107	GND													GND		8	-2		
	I_R		108	5.0 V													5.0 V		8	-2		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
4 T_A = 25°C	V_{CTE}		109	IN 3/	GND				15 V	-15 V	GND	5.0 V						K2	10		20	mV_{p-p}
			110	IN 3/		GND												K4	11		20	
			111				GND										IN 3/	K5	12		20	
			112					GND									IN 3/	K3	13		20	
7 T_A = 25°C	V_{CT} 7/		113	2.0 V	5/	5/												K1	12 or 13		1.0	mV_{p-p}
	V_{CT} 7/		114				6/	6/									2.0 V	K1	10 or 11		1.0	mV_{p-p}
							$dB_{CT} = -20 \log(V_{OUT}/V_{IN})$													60		dB
	V_{ISO}		115	0.8 V	IN 4/				15 V	-15 V	GND	5.0 V						K1	10		3.16	mV_{p-p}
			116	0.8 V		IN 4/												K1	11		3.16	
			117				IN 4/										0.8 V	K1	12		3.16	
			118					IN 4/									0.8 V	K1	13		3.16	
								$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$												50		dB
9 T_A = 25°C	t_{ON}		119	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K8	2 to 10		250	ns
			120	IN		IN								OUT				K8	3 to 11		250	
			121				IN								OUT		IN	K9	4 to 12		250	
			122					IN								OUT	IN	K7	5 to 13		250	
	t_{OFF}		123	IN	IN								OUT					K8	2 to 10		130	
			124	IN		IN								OUT				K8	3 to 11		130	
			125				IN								OUT		IN	K9	4 to 12		130	
			126					IN								OUT	IN	K7	5 to 13		130	
10 T_A = 125°C	t_{ON}		127	IN	IN								OUT					K8	2 to 10		350	
			128	IN		IN								OUT				K8	3 to 11		350	
			129				IN								OUT		IN	K9	4 to 12		350	
			130					IN								OUT	IN	K7	5 to 13		350	
	t_{OFF}		131	IN	IN								OUT					K8	2 to 10		200	
			132	IN		IN								OUT				K8	3 to 11		200	
			133				IN								OUT		IN	K9	4 to 12		200	
			134					IN								OUT	IN	K7	5 to 13		200	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
11 T_A= -55° C	t_{ON}		135	IN	IN	IN			15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		250	ns
			136	IN		IN								OUT				K8	3 to 11			
			137				IN								OUT		IN	K9	4 to 12			
			138					IN								OUT	IN	K7	5 to 13			
	t_{OFF}		139	IN	IN								OUT					K6	2 to 10		130	
			140	IN		IN								OUT				K8	3 to 11			
			141				IN								OUT		IN	K9	4 to 12			
			142					IN								OUT	IN	K7	5 to 13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Subgroup	Symbol	MIL-STD-883 method	Test No.	Adapter pin number 1/ 1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25°C	R_{DS}		1	0.8 V			-10 mA		15 V	-15 V	GND	5.0 V			-7.5 V			None	4	-7.8		V 2/
	R_{DS}		2	2.0 V		-10 mA			15 V	-15 V				-7.8 V					3	-7.8		V 2/
	$I_{S(OFF)}$		3	0.8 V		10 V			10 V	-20 V				-10 V					3	-1	1	nA
			4	2.0 V			10 V		10 V	-20 V					-10 V				4			
			5	0.8 V		7.5 V			15 V	-15 V				-7.5 V					3			
			6	2.0 V			7.5 V		15 V	-15 V					-7.5 V				4			
	$I_{D(OFF)}$		7	0.8 V		-10 V			10 V	-20 V				10 V					11			
			8	2.0 V			-10 V		10 V	-20 V					10 V				12			
			9	0.8 V		-7.5 V			15 V	-15 V				7.5 V					11			
			10	2.0 V			-7.5 V		15 V	-15 V					7.5 V				12			
	$I_{D(ON)+}$ $I_{S(ON)}$		11	0.8 V			-7.5 V		15 V	-15 V								K7	4	-2	2	
			12	2.0 V		-7.5 V												K6	3	-2	2	
	I_{IL}		13	GND														None	1	-250	-.1	µA
	I_{IH}		14	5.0 V															1	-1	10	µA
	$+I_{CC}$		15	GND															6		0.8	mA
	$+I_{CC}$		16	5.0 V															6		0.8	
	$-I_{CC}$		17	GND															7	-3		
	$-I_{CC}$		18	5.0 V															7	-3		
	I_L		19	GND															9		3.2	
	I_L		20	5.0 V															9		3.2	
	I_R		21	GND															8	-2.2		
	I_R		22	5.0 V															8	-2.2		
2 T_A=125°C	R_{DS}		23	0.8 V			-10 mA		15 V	-15 V					-7.5 V				4	-8.1		V 2/
	R_{DS}		24	2.0 V		-10 mA			15 V	-15 V				-7.5 V					3	-8.1		V 2/
	$I_{S(OFF)}$		25	0.8 V		10 V			10 V	-20 V				10 V					3	-100	100	nA
			26	2.0 V			10 V		10 V	-20 V					-10 V				4	-100	100	nA
			27	0.8 V		7.5 V			15 V	-15 V				-7.5 V					3	-100	100	nA
			28	2.0 V			7.5 V		16 V	-15 V					-7.5 V				4	-100	100	nA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
				IN		S_1	S_2		$+V_{CC}$	$-V_{CC}$	V_R	V_L		D_1	D_2							
2 T_A=125° C	$I_{D(OFF)}$		29	0.8 V		-10 V			10 V	-20 V	GND	5.0 V		10 V				None	11	-100	100	nA
			30	2.0 V			-10 V		10 V	-20 V					10 V				12			
			31	0.8 V		-7.5 V			15 V	-15 V				7.5 V					11			
			32	2.0 V			-7.5 V								7.5 V				12			
	$I_{D(ON)+}$		33	0.8 V			-7.5 V											K7	4	-200	200	
	$I_{S(ON)}$		34	2.0 V		-7.5 V												K6	3	-200	200	
	I_{IL}		35	GND														None	1	-250	-.1	µA
	I_{IH}		36	5.0 V															1	-2	20	µA
	$+I_{CC}$		37	GND															6		0.8	mA
	$+I_{CC}$		38	5.0 V															6		0.8	mA
	$-I_{CC}$		39	GND															7	-3		mA
	$-I_{CC}$		40	5.0 V															7	-3		mA
	I_L		41	GND															9		3.2	mA
	I_L		42	5.0 V															9		3.2	mA
	I_R		43	GND															8	-2.2		mA
	I_R		44	5.0 V															8	-2.2		mA
3 T_A=-55° C	R_{DS}		45	0.8 V			-10 mA								-7.5 V				4	-7.8		V 2/
	R_{DS}		46	2.0 V		-10 mA								-7.5 V					3	-7.8		V 2/
	$I_{S(OFF)}$		47	0.8 V		10 V			10 V	-20 V				-10 V					3	-100	100	nA
			48	2.0 V			10 V		10 V	-20 V					-10 V				4			
			49	0.8 V		7.5 V			15 V	-15 V				-7.5 V					3			
			50	2.0 V			7.5 V		15 V	-15 V					-7.5 V				4			
	$I_{D(OFF)}$		51	0.8 V		-10 V			10 V	-20 V				10 V					11			
			52	2.0 V			-10 V		10 V	-20 V					10 V				12			
			53	0.8 V		-7.5 V			15 V	-15 V				7.5 V					11			
			54	2.0 V			-7.5 V		15 V	-15 V					7.5 V				12			
	$I_{D(ON)+}$		55	0.8 V			-7.5 V		15 V	-15 V								K7	4	-200	200	
	$I_{S(ON)}$		56	2.0 V		-7.5 V			15 V	-15 V								K6	3	-200	200	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
				IN		S_1	S_2		$+V_{CC}$	$-V_{CC}$	V_R	V_L		D_1	D_2							
3 T_A = -55°C	I_{IL}		57	GND					15 V	-15 V	GND	5.0 V						None	1	-250	-.1	µA
	I_{IH}		58	5.0 V															1	-1	10	µA
	$+I_{CC}$		59	GND															6		1.4	mA
	$+I_{CC}$		60	5.0 V															6		1.4	
	$-I_{CC}$		61	GND															7	-4.8		
	$-I_{CC}$		62	5.0 V															7	-4.8		
	I_L		63	GND															9		5	
	I_L		64	5.0 V															9		5	
	I_R		65	GND															8	-2		
	I_R		66	5.0 V															8	-2		
4 T_A = 25°C	V_{CTE}		67	IN 3/														K2	11		20	mV_{p-p}
	V_{CTE}		68	IN 3/														K3	12		20	mV_{p-p}
7 T_A = 25°C	V_{CT} 7/		69	2.0 V		IN 4/			15 V	-15 V	GND	5.0 V						K1	12		1.0	mV_{p-p}
								$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$												60		dB
	V_{ISO}		70	2.0 V			IN 4/		15 V	-15 V	GND	5.0 V						K1	12		3.16	mV_{p-p}
	V_{ISO}		71	0.8 V		IN 4/			15 V	-15 V	GND	5.0 V						K1	11		3.16	mV_{p-p}
								$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$												60		dB
9 T_A = 25°C	t_{ON}		72	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	11		150	ns
	t_{ON}		73				IN								OUT			K5	12		150	
	t_{OFF}		74			IN								OUT				K4	11		130	
	t_{OFF}		75				IN								OUT			K5	12		130	
10 T_A = 125°C	t_{ON}		76			IN								OUT				K4	11		300	
	t_{ON}		77				IN								OUT			K5	12		300	
	t_{OFF}		78			IN								OUT				K4	11		200	
	t_{OFF}		79				IN								OUT			K5	12		200	
11 T_A = -55°C	t_{ON}		80			IN								OUT				K4	11		150	
	t_{ON}		81				IN								OUT			K5	12		150	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
				IN		S_1	S_2		$+V_{CC}$	$-V_{CC}$	V_R	V_L		D_1	D_2							
11 T_A=-55°C	t_{OFF}		82	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	11		130	ns
	t_{OFF}		83	↓			IN		15 V	-15 V	GND	5.0 V			OUT			K5	12		130	ns
12 T_A=25°C	t_{D1}		84	IN		IN	IN		15 V	-15 V	GND	5.0 V						K4, K8	11	5		ns
	t_{D2}		85	IN		IN	IN		15 V	-15 V	GND	5.0 V						K4, K8	11	5		ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25°C	R_{DS}		1	0.8 V			-10mA		15 V	-15 V	GND	5.0 V			-10 V			None	4	-10.75		V 2/
	R_{DS}		2	2.0 V		-10 mA			15 V	-15 V				-10 V					3	-10.75		V 2/
	$I_{S(OFF)}$		3	0.8 V		10 V			10 V	-20 V				-10 V					3	-1	1	nA
			4	2.0 V			10 V		10 V	-20 V					-10 V				4			
			5	0.8 V		10 V			15 V	-15 V				-10 V					3			
			6	2.0 V			10 V		15 V	-15 V					-10 V				4			
	$I_{D(OFF)}$		7	0.8 V		-10 V			10 V	-20 V				10 V					11			
			8	2.0 V			-10 V		10 V	-20 V					10 V				12			
			9	0.8 V		-10 V			15 V	-15 V				10 V					11			
			10	2.0 V			-10 V		15 V	-15 V					10 V				12			
	$I_{D(ON)+}$		11	0.8 V			-10 V		15 V	-15 V								K7	4	-2	2	
	$I_{S(ON)}$		12	2.0 V		-10 V												K6	3	-2	2	
	I_{IL}		13	GND														None	1	-250	-.1	µA
	I_{IH}		14	5.0 V															1	-1	10	µA
	$+I_{CC}$		15	GND															6		0.8	mA
	$+I_{CC}$		16	5.0 V															6		0.8	
	$-I_{CC}$		17	GND															7	-3		
	$-I_{CC}$		18	5.0 V															7	-3		
	I_L		19	GND															9		3.2	
	I_L		20	5.0 V															9		3.2	
	I_R		21	GND															8	-2.2		
	I_R		22	5.0 V															8	-2.2		
2 T_A=125°C	R_{DS}		23	0.8 V			-10mA		15 V	-15 V					-10 V				4	-11.50		V 2/
	R_{DS}		24	2.0 V		-10 mA			15 V	-15 V				-10 V					3	-11.50		V 2/
	$I_{S(OFF)}$		25	0.8 V		10 V			10 V	-20 V				-10 V					3	-100	100	nA
	$I_{S(OFF)}$		26	2.0 V			10 V		10 V	-20 V					-10 V				4	-100	100	nA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
				IN		S_1	S_2		$+V_{CC}$	$-V_{CC}$	V_R	V_L		D_1	D_2							
2 T_A=125°C	$I_{S(OFF)}$		27	0.8 V		10 V			15 V	-15 V	GND	5.0 V		-10 V				None	3	-100	100	nA
	$I_{S(OFF)}$		28	2.0 V			10 V		15 V	-15 V					-10 V				4			
	$I_{D(OFF)}$		29	0.8 V		-10 V			10 V	-20 V				10 V					11			
			30	2.0 V			-10 V		10 V	-20 V					10 V				12			
			31	0.8 V		-10 V			15 V	-15 V				10 V					11			
			32	2.0 V			-10 V		15 V	-15 V					10 V				12			
	$I_{D(ON)}$+		33	0.8 V			-10 V											K7	4	-200	200	
	$I_{S(ON)}$		34	2.0 V		-10 V												K6	3	-200	200	
	I_{IL}		35	GND														None	1	-250	-.1	µA
	I_{IH}		36	5.0 V															1	-2	20	µA
	$+I_{CC}$		37	GND															6		0.8	mA
	$+I_{CC}$		38	5.0 V															6		0.8	
	$-I_{CC}$		39	GND															7	-3		
	$-I_{CC}$		40	5.0 V															7	-3		
	I_L		41	GND															9		3.2	
	I_L		42	5.0 V															9		3.2	
	I_R		43	GND															8	-2.2		
	I_R		44	5.0 V															8	-2.2		
3 T_A=-55°C	R_{DS}		45	0.8 V			-10 mA												4	-10.75		V 2/
	R_{DS}		46	2.0 V		-10 mA													3	-10.75		V 2/
	$I_{S(OFF)}$		47	0.8 V		10 V			10 V	-20 V				-10 V					3	-100	100	nA
			48	2.0 V			10 V		10 V	-20 V					-10 V				4			
			49	0.8 V					15 V	-15 V									3			
			50	2.0 V					15 V	-15 V									4			
	$I_{D(OFF)}$		51	0.8 V		-10 V			10 V	-20 V				10 V					11			
			52	2.0 V			-10 V		10 V	-20 V					10 V				12			
			53	0.8 V					15 V	-15 V									11			
			54	2.0 V					15 V	-15 V									12			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
3 T_A = -55° C	$I_{D(ON)+}$		55	0.8 V			-10 V		15 V	-15 V	GND	5.0 V						K7	4	-200	200	nA
	$I_{S(ON)}$		56	2.0 V		-10 V												K6	3	-200	200	nA
	I_{IL}		57	GND														None	1	-250	-.1	µA
	I_{IH}		58	5.0 V															1	-1	10	µA
	$+I_{CC}$		59	GND															6		1.4	mA
	$+I_{CC}$		60	5.0 V															6		1.4	
	$-I_{CC}$		61	GND															7	-4.8		
	$-I_{CC}$		62	5.0 V															7	-4.8		
	I_L		63	GND															9		5	
	I_L		64	5.0 V															9		5	
	I_R		65	GND															8	-2		
	I_R		66	5.0 V															8	-2		
4 T_A = 25° C	V_{CTE}		67	IN 3/														K2	11		20	mV_{p-p}
	V_{CTE}		68	IN 3/														K3	12		20	mV_{p-p}
7 T_A = 25° C	V_{CT} 7/		69	2.0 V		IN 4/												K1	12		1.0	mV_{p-p}
							dB_{CT} = -20 log (V_{OUT}/V_{IN})													50		dB
	V_{ISO}		70	2.0 V			IN 4/		15 V	-15 V	GND	5.0 V						K1	12		3.16	mV_{p-p}
	V_{ISO}		71	0.8 V		IN 4/			15 V	-15 V	GND	5.0 V						K1	11		3.16	mV_{p-p}
							dB_{ISO} = -20 log (V_{OUT}/V_{IN})													60		dB
9 T_A = 25° C	t_{ON}		72	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	11		250	ns
	t_{ON}		73				IN								OUT			K5	12		250	
	t_{OFF}		74			IN								OUT				K4	11		130	
	t_{OFF}		75				IN								OUT			K5	12		130	
10 T_A = 125° C	t_{ON}		76			IN								OUT				K4	11		350	
	t_{ON}		77				IN								OUT			K5	12		350	
	t_{OFF}		78			IN								OUT				K4	11		200	
	t_{OFF}		79				IN								OUT			K5	12		200	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1	2	3	4	5	6	7	8	9	10	11	12	13	14	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
				IN		S_1	S_2		$+V_{CC}$	$-V_{CC}$	V_R	V_L		D_1	D_2							
11 T_A=-55° C	t_{ON}		80	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	11		250	ns
	t_{ON}		81	IN			IN								OUT			K5	12		250	ns
	t_{OFF}		82	IN		IN								OUT				K4	11		130	ns
	t_{OFF}		83	IN			IN								OUT			K5	12		130	ns
12 T_A=25° C	t_{D1}		84	IN		IN	IN											K4, K8	11	5		ns
	t_{D2}		85	IN		IN	IN											K4, K8	11	5		ns

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN1	2 S_1	3 S_3	4 S_2	5 S4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25° C	R_{DS}		1	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-7.5 V					None	2	-7.8		V 2/
			2	0.8 V		-10 mA								-7.5 V					3	-7.8		V 2/
			3				-10 mA								-7.5 V		2.0 V		4	-7.8		V 2/
			4					-10 mA								-7.5 V	0.8 V		5	-7.8		V 2/
	$I_{S(OFF)}$		5	0.8 V	10 V				10 V	-20 V			-10 V						2	-1	1	nA
			6	2.0 V		10 V								-10 V					3			
			7				10 V								-10 V		0.8 V		4			
			8					10 V								-10 V	2.0 V		5			
			9	0.8 V	7.5 V				15 V	-15 V			-7.5 V						2			
			10	2.0 V		7.5 V								-7.5 V					3			
			11				7.5 V								-7.5 V		0.8 V		4			
			12					7.5 V								-7.5 V	2.0 V		5			
	$I_{D(OFF)}$		13	0.8 V	-10 V				10 V	-20 V			10 V						10			
			14	2.0 V		-10 V								10 V					11			
			15				-10 V								10 V		0.8 V		12			
			16					-10 V								10 V	2.0 V		13			
			17	0.8 V	-7.5 V				15 V	-15 V			7.5 V						10			
			18	2.0 V		-7.5 V								7.5 V					11			
			19				-7.5 V								7.5 V		0.8 V		12			
			20					-7.5 V								7.5 V	2.0 V		13			
	$I_{D(ON)+}$ $I_{S(ON)}$		21	2.0 V	-7.5 V													K10	9	-2	2	
			22	0.8 V		-7.5 V												K11	3	-2	2	
			23				-7.5 V										2.0 V	K12	4	-2	2	
			24					-7.5 V									0.8 V	K13	5	-2	2	
	I_{IL}		25	GND														None	1	-250	-.1	µA
	I_{IL}		26														GND	None	14	-250	-.1	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25° C	I_{IH}		27	5.0 V					15 V	-15 V	GND	5.0 V						None	1	-1	10	µA
	I_{IH}		28														5.0 V		14	-1	10	µA
	$+I_{CC}$		29	GND													GND		6		1.5	mA
	$+I_{CC}$		30	5.0 V													5.0 V		6		1.5	
	$-I_{CC}$		31	GND													GND		7	-5		
	$-I_{CC}$		32	5.0 V													5.0 V		7	-5		
	I_L		33	GND													GND		9		4.5	
	I_L		34	5.0 V													5.0 V		9		4.5	
	I_R		35	GND													GND		8	-2.2		
	I_R		36	5.0 V													5.0 V		8	-2.2		
2 T_A=125° C	R_{DS}		37	2.0 V	-10 mA								-7.5 V						2	-8.1		V 2/
			38	0.8 V		-10 mA								-7.5 V					3	-8.1		V 2/
			39				-10 mA								-7.5 V		2.0 V		4	-8.1		V 2/
			40					-10 mA								-7.5 V	0.8 V		5	-8.1		V 2/
	$I_{S(OFF)}$		41	0.8 V	10 V				10 V	-20 V			-10 V						2	-100	100	nA
			42	2.0 V		10 V								-10 V					3			
			43				10 V								-10 V		0.8 V		4			
			44					10 V								-10 V	2.0 V		5			
			45	0.8 V	7.5 V				15 V	-15 V			-7.5 V						2			
			46	2.0 V		7.5 V								-7.5 V					3			
			47				7.5 V								-7.5 V		0.8 V		4			
			48					7.5 V								-7.5 V	2.0 V		5			
	$I_{D(OFF)}$		49	0.8 V	-10 V				10 V	-20 V			10 V						10			
			50	2.0 V		-10 V								10 V					11			
			51				-10 V								10 V		0.8 V		12			
			52					-10 V								10 V	2.0 V		13			
			53	0.8 V	-7.5 V				15 V	-15 V			7.5 V						10			
			54	2.0 V		-7.5 V								7.5 V					11			
			55				-7.5 V								7.5 V		0.8 V		12			
			56					-7.5 V								7.5 V	2.0 V		13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
2 T_A=125°C	$I_{D(ON)+}$		57	2.0 V	-7.5 V				15 V	-15 V	GND	5.0 V						K10	2	-200	200	nA
	$I_{S(ON)}$		58	0.8 V		-7.5 V												K11	3			
			59				-7.5 V										2.0 V	K12	4			
			60					-7.5 V									0.8 V	K13	5			
	I_{IL}		61	GND														None	1	-250	-.1	μA
	I_{IL}		62														GND		14	-250	-.1	μA
	I_{IH}		63	5.0 V															1	-2	20	μA
	I_{IH}		64														3.0 V		14	-2	20	μA
	$+I_{CC}$		65	GND													GND		6		1.5	mA
	$+I_{CC}$		66	5.0 V													3.0 V		6		1.5	
	$-I_{CC}$		67	GND													GND		7	-5		
	$-I_{CC}$		68	5.0 V													3.0 V		7	-5		
	I_L		69	GND													GND		9		4.5	
	I_L		70	5.0 V													3.0 V		9		4.5	
	I_R		71	GND													GND		8	-2.2		
	I_R		72	5.0 V													5.0 V		8	-2.2		
3 T_A=-55°C	R_{DS}		73	3.0 V	-10 mA								-7.5 V						2	-7.8		V 2/
			74	0.8 V		-10 mA								-7.5 V					3			V 2/
			75				-10 mA								-7.5 V		2.0 V		4			V 2/
			76					-10 mA								-7.5 V	0.8 V		5			V 2/
	$I_{S(OFF)}$		77	0.8 V	10 V				10 V	-20 V			-10 V						2	-100	100	nA
			78	2.0 V		10 V								-10 V					3			
			79				10 V								-10 V		0.8 V		4			
			80					10 V								-10 V	2.0 V		5			
			81	0.8 V	7.5 V				15 V	-15 V			-7.5 V						2			
			82	2.0 V		7.5 V								-7.5 V					3			
			83				7.5 V								-7.5 V		0.8 V		4			
			84					7.5 V								-7.5 V	2.0 V		5			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
3 T_A=-55° C	$I_{D(OFF)}$		85	0.8 V	-10 V				10 V	-20 V	GND	5.0 V	10 V					None	10	-100	100	nA
			86	2.0 V		-10 V								10 V					11			
			87				-10 V								10 V		0.8 V		12			
			88					-10 V								10 V	2.0 V		13			
			89	0.8 V	-7.5 V				15 V	-15 V			7.5 V						10			
			90	2.0 V		-7.5 V								7.5 V					11			
			91				-7.5 V								7.5 V		0.8 V		12			
			92					-7.5 V								7.5 V	2.0 V		13			
	$I_{D(ON)+}$		93	2.0 V	-7.5 V													K10	2	-200	200	
	$I_{S(ON)}$		94	0.8 V		-7.5 V												K11	3			
			95				-7.5 V										2.0 V	K12	4			
			96					-7.5 V									0.8 V	K13	5			
	I_{IL}		97	GND														None	1	-250	-.1	μA
	I_{IL}		98														GND		14	-250	-.1	μA
	I_{IH}		99	5.0 V															1	-1	10	μA
	I_{IH}		100														5.0 V		14	-1	10	μA
	$+I_{CC}$		101	GND													GND		6		2.5	mA
	$+I_{CC}$		102	5.0 V													5.0 V		6		2.5	
	$-I_{CC}$		103	GND													GND		7	-8		
	$-I_{CC}$		104	5.0 V													5.0 V		7	-8		
	I_L		105	GND													GND		9		7	
	I_L		106	5.0 V													5.0 V		9		7	
	I_R		107	GND													GND		8	-2		
	I_R		108	5.0 V													5.0 V		8	-2		
4 T_A=25° C	V_{CTE}		109	IN 3/	GND													K2	10		20	mV_{p-p}
			110	IN 3/		GND												K4	11		20	mV_{p-p}
			111				GND										IN 3/	K5	12		20	mV_{p-p}
			112					GND									IN 3/	K3	13		20	mV_{p-p}

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
7 T_A=25°C	V_{CT} 7/		113	2.0 V	IN 4/				15 V	-15 V	GND	5.0 V						K1	11		1.0	mV_{p-p}
			114	0.8 V		IN 4/												K1	10			
			115				IN 4/										2.0 V	K1	13			
			116					IN 4/									0.8 V	K1	12			
								dB_{CT} = -20 log (V_{OUT}/V_{IN})												60		dB
	V_{ISO}		117	0.8 V	IN 4/				15 V	-15 V	GND	5.0 V						K1	10		3.16	mV_{p-p}
			118	2.0 V		IN 4/												K1	11		3.16	
			119				IN 4/										0.8 V	K1	12		3.16	
			120					IN 4/									2.0 V	K1	13		3.16	
								dB_{ISO} = -20 log (V_{OUT}/V_{IN})												50		dB
9 T_A=25°C	t_{ON}		121	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K8	2 to 10		150	ns
			122	IN		IN								OUT				K8	3 to 11			
			123				IN								OUT		IN	K9	4 to 12			
			124					IN								OUT	IN	K7	5 to 13			
	t_{OFF}		125	IN	IN								OUT					K8	2 to 10		130	
			126	IN		IN								OUT				K8	3 to 11			
			127				IN								OUT			K9	4 to 12			
			128					IN								OUT		K7	5 to 13			
10 T_A=125°C	t_{ON}		129	IN	IN								OUT					K8	2 to 10		300	
			130	IN		IN								OUT				K8	3 to 11			
			131				IN								OUT		IN	K9	4 to 12			
			132					IN								OUT	IN	K7	5 to 13			
	t_{OFF}		133	IN	IN								OUT					K8	2 to 10		200	
			134	IN		IN								OUT				K8	3 to 11			
			135				IN								OUT		IN	K9	4 to 12			
			136					IN								OUT	IN	K7	5 to 13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN1	2 S_1	3 S_3	4 S_2	5 S_4	6 +VCC	7 -VCC	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
11 $T_A = -55°C$	t_{ON}		137	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		150	ns
			138	IN		IN								OUT				K8	3 to 11			
			139				IN								OUT		IN	K9	4 to 12			
			140					IN								OUT	IN	K7	5 to 13			
	t_{OFF}		141	IN	IN								OUT					K6	2 to 10		130	
			142	IN		IN								OUT				K8	3 to 11			
			143				IN								OUT		IN	K9	4 to 12			
			144					IN								OUT	IN	K7	5 to 13			
12 $T_A = 25°C$	t_{D1}		145	IN	IN	IN												K6, K14	11	5		
	t_{D2}		146	IN	IN	IN												K6, K14	11	5		
	t_{D1}		147				IN	IN									IN	K7, K15	12	5		
	t_{D2}		148				IN	IN									IN	K7, K15	12	5		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
1 T_A=25°C	R_{DS}		1	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-10 V					None	2	-10.75		V 2/
			2	0.8 V		-10 mA								-10 V					3			
			3				-10 mA								-10 V		2.0 V		4			
			4					-10 mA								-10 V	0.8 V		5			
	$I_{S(OFF)}$		5	0.8 V	10 V				10 V	-20 V			-10 V						2	-1	1	nA
			6	2.0 V		10 V								-10 V					3			
			7				10 V								-10 V		0.8 V		4			
			8					10 V								-10 V	2.0 V		5			
			9	0.8 V	10 V				15 V	-15 V			-10 V						2			
			10	2.0 V		10 V								-10 V					3			
			11				10 V								-10 V		0.8 V		4			
			12					10 V								-10 V	2.0 V		5			
	$I_{D(OFF)}$		13	0.8 V	-10 V				10 V	-20 V			10 V						10			
			14	2.0 V		10 V								10 V					11			
			15				10 V								10 V		0.8 V		12			
			16					10 V								10 V	2.0 V		13			
			17	0.8 V	-10 V				15 V	-15 V			10 V						10			
			18	2.0 V		-10 V								10 V					11			
			19				-10 V								10 V		0.8 V		12			
			20					-10 V								10 V	2.0 V		13			
	$I_{D(ON)+}$		21	2.0 V	-10 V													K10	2	-2	2	
	$I_{S(ON)}$		22	0.8 V		-10 V												K11	3			
			23				-10 V										2.0 V	K12	4			
			24					-10 V									0.8 V	K13	5			
	I_{IL}		25	GND														None	1	-250	-.1	µA
	I_{IL}		26														GND		14	-250	-.1	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min.	Limits Max	Unit
1 T_A=25°C	I_{IH}		27	5.0 V					15 V	-15 V	GND	5.0 V						None	1	-1	10	µA
	I_{IH}		28														5.0 V		14	-1	10	µA
	$+I_{CC}$		29	GND													GND		6		1.5	mA
	$+I_{CC}$		30	5.0 V													5.0 V		6		1.5	
	$-I_{CC}$		31	GND													GND		7	-5		
	$-I_{CC}$		32	5.0 V													5.0 V		7	-5		
	I_L		33	GND													GND		9		4.5	
	I_L		34	5.0 V													5.0 V		9		4.5	
	I_R		35	GND													GND		8	-2.2		
	I_R		36	5.0 V													5.0 V		8	-2.2		
2 T_A=125°C	R_{DS}		37	2.0 V	-10 mA								-10 V						2	-11.50		V 2/
			38	0.8 V		-10 mA								-10 V					3			
			39				-10 mA								-10 V		2.0 V		4			
			40					-10 mA								-10 V	0.8 V		5			
	$I_{S(OFF)}$		41	0.8 V	10 V				10 V	-20 V			-10 V						2	-100	100	nA
			42	2.0 V		10 V								-10 V					3			
			43				10 V								-10 V		0.8 V		4			
			44					10 V								-10 V	2.0 V		5			
			45	0.8 V	10 V				15 V	-15 V			-10 V						2			
			46	2.0 V		10 V								-10 V					3			
			47				10 V								-10 V		0.8 V		4			
			48					10 V								-10 V	2.0 V		5			
	$I_{D(OFF)}$		49	0.8 V	-10 V				10 V	-20 V			10 V						10			
			50	2.0 V		-10 V								10 V					11			
			51				-10 V								10 V		0.8 V		12			
			52					-10 V								10 V	2.0 V		13			
			53	0.8 V	-10 V				15 V	-15 V			10 V						10			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adaptor pin number 1/ 1 IN_1	2 S1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
2 T_A=125°C	$I_{D(OFF)}$		54	2.0 V		-10 V			15 V	-15 V	GND	5.0 V		10 V				None	11	-100	100	nA
	$I_{D(OFF)}$		55				-10 V								10 V		0.8 V	None	12	-100	100	
	$I_{D(OFF)}$		56					-10 V								10 V	2.0 V	None	13	-100	100	
	$I_{D(ON)}$+		57	2.0 V	-10 V													K10	2	-200	200	
	$I_{S(ON)}$		58	0.8 V		-10 V												K11	3	-200	200	
			59				-10 V										2.0 V	K12	4	-200	200	
			60					-10 V									0.8 V	K13	5	-200	200	
	I_{IL}		61	GND														None	1	-250	-.1	µA
	I_{IL}		62														GND		14	-250	-.1	µA
	I_{IH}		63	5.0 V															1	-2	20	µA
	I_{IH}		64														5.0 V		14	-2	20	µA
	$+I_{CC}$		65	GND													GND		6		1.5	mA
	$+I_{CC}$		66	5.0 V													5.0 V		6		1.5	
	$-I_{CC}$		67	GND													GND		7	-5		
	$-I_{CC}$		68	5.0 V													5.0 V		7	-5		
	I_L		69	GND													GND		9		4.5	
	I_L		70	5.0 V													5.0 V		9		4.5	
	I_R		71	GND													GND		8	-2.2		
	I_R		72	5.0 V													5.0 V		8	-2.2		
3 T_A=-55°C	R_{DS}		73	2.0 V	-10 mA								-10 V						2	-10.75		V 2/
			74	0.8 V		-10 mA								-10 V					3			
			75				-10 mA								-10 V		2.0 V		4			
			76					-10 mA								-10 V	0.8 V		5			
	$I_{S(OFF)}$		77	0.8 V	10 V				10 V	-20 V			-10 V						2	-100	100	nA
	$I_{S(OFF)}$		78	2.0 V		10 V			10 V	-20 V				-10 V					3	-100	100	nA
	$I_{S(OFF)}$		79				10 V		10 V	-20 V					-10 V		0.8 V		4	-100	100	nA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
3 T_A=-55° C	$I_{S(OFF)}$		80					10 V	10 V	-20 V	GND	5.0 V				-10 V	2.0 V	None	5	-100	100	nA
			81	0.8 V	10 V				15 V	-15 V			-10 V						2			
			82	2.0 V		10 V								-10 V					3			
			83				10 V								-10 V		0.8 V		4			
			84					10 V								-10 V	2.0 V		5			
	$I_{D(OFF)}$		85	0.8 V	-10 V				10 V	-20 V			10 V						10			
			86	2.0 V		-10 V								10 V					11			
			87				-10 V								10 V		0.8 V		12			
			88					-10 V								10 V	2.0 V		13			
			89	0.8 V	-10 V				15 V	-15 V			10 V						10			
			90	2.0 V		-10 V								10 V					11			
			91				-10 V								10 V		0.8 V		12			
			92					-10 V								10 V	2.0 V		13			
	$I_{D(ON)}$+ $I_{S(ON)}$		93	2.0 V	-10 V													K10	2	-200	200	
			94	0.8 V		-10 V												K11	3			
			95				-10 V										2.0 V	K12	4			
			96					-10 V									0.8 V	K13	5			
	I_{IL}		97	GND														None	1	-250	-.1	µA
	I_{IL}		98														GND		14	-250	-.1	µA
	I_{IH}		99	5.0 V															1	-1	10	µA
	I_{IH}		100														5.0 V		14	-1	10	µA
	$+I_{CC}$		101	GND													GND		6		2.5	mA
	$+I_{CC}$		102	5.0 V													5.0 V		6		2.5	
	$-I_{CC}$		103	GND													GND		7	-8		
	$-I_{CC}$		104	5.0 V													5.0 V		7	-8		
	I_L		105	GND													GND		9		7	
	I_L		106	5.0 V													5.0 V		9		7	
	I_R		107	GND													GND		8	-2		
	I_R		108	5.0 V													5.0 V		8	-2		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
4 T_A = 25°C	V_{CTE}		109	IN 3/	GND				15 V	-15 V	GND	5.0 V						K8	10		20	mV_{p-p}
			110	IN 3/		GND												K4	11		20	
			111				GND										IN 3/	K5	12		20	
			112					GND									IN 3/	K3	13		20	
7 T_A = 25°C	V_{CT} 2/		113	2.0 V	IN 4/													K1	11		1.0	
			114	0.8 V		IN 4/												K1	10		1.0	
			115				IN 4/										2.0 V	K1	13		1.0	
			116					IN 4/									0.8 V	K1	12		1.0	
							dB_{CT} = -20 log (V_{OUT}/V_{IN})													60		dB
	V_{ISO}		117	0.8 V	IN 4/				15 V	-15 V	GND	5.0 V						K1	10	0	3.16	mV_{p-p}
			118	2.0 V		IN 4/												K1	11	0	3.16	
			119				IN 4/										0.8 V	K1	12	0	3.16	
			120					IN 4/									2.0 V	K1	13	0	3.16	
							dB_{ISO} = -20 log (V_{OUT}/V_{IN})													50		dB
9 T_A = 25°C	t_{ON}		121	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		250	ns
			122	IN		IN								OUT				K8	3 to 11			
			123				IN								OUT		IN	K9	4 to 12			
			124					IN								OUT	IN	K7	5 to 13			
	t_{OFF}		125	IN	IN								OUT					K6	2 to 10		130	
			126	IN		IN								OUT				K8	3 to 11			
			127				IN								OUT			K9	4 to 12			
			128					IN								OUT		K7	5 to 13			
10 T_A = 125°C	t_{ON}		129	IN	IN								OUT					K6	2 to 10		350	
			130	IN		IN								OUT				K8	3 to 11			
			131				IN								OUT		IN	K9	4 to 12			
			132					IN								OUT	IN	K7	5 to 13			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 -Continued.

Subgroup	Symbol	MIL-STD-883 method	Test no.	Adapter pin number 1/ 1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2	Relays energized	Measured pin no.	Limits Min	Limits Max	Unit
10 T_A=125° C	t_{OFF}		133	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		200	ns
			134	IN		IN								OUT				K8	3 to 11			
			135				IN								OUT		IN	K9	4 to 12			
			136					IN								OUT	IN	K7	5 to 13			
11 T_A=-55° C	t_{ON}		137	IN	IN								OUT					K6	2 to 10		250	
			138	IN		IN								OUT				K8	3 to 11			
			139				IN								OUT		IN	K9	4 to 12			
			140					IN								OUT	IN	K7	5 to 13			
	t_{OFF}		141	IN	IN								OUT					K6	2 to 10		130	
			142	IN		IN								OUT				K8	3 to 11			
			143				IN								OUT		IN	K9	4 to 12			
			144					IN								OUT	IN	K7	5 to 13			
12 T_A=25° C	t_{D1}		145	IN	IN	IN												K6, K14	11	5		
	t_{D2}		146	IN	IN	IN												K6, K14	11	5		
	t_{D1}		147				IN	IN									IN	K7, K15	12	5		
	t_{D2}		148				IN	IN									IN	K7, K15	12	5		

NOTES:

1/ The test circuits used with table III are shown in figures 6, 7, and 8. The waveforms on figure 9 apply to all device types as specified within table III (see tests for t_{ON} and t_{OFF}). The waveforms in figure 10 apply to device types 05, 06, 07, and 08 as specified within table III.

2/ R_{DS} (in Ω) = -100 (measured value +7.5) for device types 01, 03, 05, and 07. R_{DS} (in Ω) = -100 (measured value +10) for device types 02, 04, 06, and 08. R_{DS} may be measured differentially with respect to V_A. In case of differentially measured voltages, the table III limits representing voltage drop across the tested switch must be maintained.

3/ The input pulse generator shall have the following characteristics: (a) V_{gen} = 3.0 V, (b) Rise time ≤ 10ns (c) Fall time ≤10 ns and (d) PRR = 100 KHz at 50% duty cycle.

4/ The input generator shall have the following characteristics: V_{gen} = 1 V_{p-p} at 10 MHz. V_{CT} is measured on monolithic devices only.

5/ Input (IN 3/) shall be applied to either S_1 or S_3.

6/ Input (IN 3/) shall be applied to either S_2 or S_4.

7/ V_{CT} applies only to monolithic devices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End point electrical parameters shall be as specified in table II.
b. Life tests for class B and C (method 1005 of MIL-STD-883): Test condition C using the circuit shown on figure 4, test condition D using the circuit shown on figure 3 or test condition F using the circuit shown on figure 5.
c. Subgroup 12 shall be added to group A inspection as specified in table III herein. The LTPD for subgroup 12 shall be 5 for all classes.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883 and as follows:

a. End point electrical parameters shall be as specified in table II herein.
b. Subgroup 6, method 5005 of MIL-STD-883 shall be added to group D inspection and it shall consist of the group A, subgroups 4 and 7 (see table III herein).
c. Subgroup 6 shall be performed during initial qualification one device for each device type listed in 1.2.1 herein and shall be performed periodically on one device chosen from those device types listed in 1.2.1 herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables. Electrical test circuits as prescribed herein or in the referenced test methods of MIL-STD-883 shall be acceptable. Other test circuits shall require the approval of the qualifying activity.

4.5.1 Voltage and current. All voltage values given, except differential voltages, are referenced to the external zero reference level of the supply voltage. Currents given are conventional current and positive when flowing into the referenced terminal.

4.5.2 Life test cooldown procedure. When devices are measured at 25°C following application of the operating life or burn-in test condition, they shall be cooled to room temperature prior to removal of the bias.

4.6 Inspection of packaging. The inspection of packaging shall be in accordance with MIL-M-38510, except that the rough handling test shall not apply.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

TABLE IV. Groups C and D end point electrical parameters (T_A = 25°C, $\pm V_{CC}$ = ±15 V).

Test no.	Test	Device types					
		01,03,05,07			02,04,06,08		
		Limits		Delta	Limits		Delta
		Min	Max		Min	Max	
1,2	R_{DS}	-7.8 V		±30 mV	-10.75 V		75 mV
3,4,5,6	$I_{S(OFF)}$	-1 mA	1 nA	±0.5 nA	-1 nA	1 nA	±0.5 nA
7,8,9,10	$I_{D(OFF)}$	-1 mA	1 nA	±0.5 nA	-1 nA	1 nA	±0.5 nA

6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

6.2 Intended use. Microcircuits conforming to this specification are intended for use for Government microcircuit applications (original equipment) and logistic purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

6.3 Ordering data. The contract should specify the following:

a. Complete part number (see 1.2).
b. Requirements for delivery of one copy of the qualify conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.
c. Requirement for certificate of compliance, if applicable.
d. Requirements for notification of change of product or process to procuring activity in addition to notification to the qualifying activity, if applicable.
e. Requirements for failure analysis (including required test condition of method 5003), corrective action and reporting of results, if applicable.
f. Requirements for quality assurance options.
g. Requirements for carriers, special lead lengths or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.
h. Requirement for JAN marking.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-STD-1313, MIL-STD-1331 and as follows:

$+V_{CC}$	Positive supply voltage
$-V_{CC}$	Negative supply voltage
$+I_{CC}$	Positive supply current
$-I_{CC}$	Negative supply current
V_L	Logic supply voltage
I_L	Logic supply current
R_{DS}	Resistance of an "ON" switch
V_D	Drain voltage
V_S	Source voltage
I_D	Drain current
I_S	Source current
$I_{D(ON)}$	Leakage current from an "ON" driver into the switch
$I_{D(OFF)}$	Leakage current into the drain terminal of an "OFF" switch
$I_{S(OFF)}$	Leakage current into the source terminal of an "OFF" switch
t_{ON}	Switching time as defined in figure 9
t_{OFF}	Switching time as defined in figure 9
V_A	Analog signal voltage
I_R	Reference current
V_R	Reference voltage
V_{CTE}	Charge transfer error
V_{CT}	Crosstalk between switches
V_{ISO}	Isolation from source to drain of a closed switch

6.5 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits procured for Government logistic support will be procured to device class B (see 1.2.2), lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

6.6 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed Generic-Industry type. Generic-Industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of Generic-Industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-Industry type
01	DG 181A
02	DG 182A
03	DG 184A
04	DG 185A
05	DG 187A
06	DG 188A
07	DG 190A
08	DG 191A

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - ER, MI
Navy - EC, SH
Air Force - 11, 85, 99
DLA - ES
NASA - NA

User activities:
Army - SM, AR
Navy - CG, MC, AS, OS
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-0231)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.