INCH-POUND
MIL-M-38510/111A
10 December 2003
SUPERSEDING
MIL-M-38510/111
3 January 1979

MILITARY SPECIFICATION

MICROCIRCUITS, ANALOG SWITCH WITH DRIVER, MONOLITHIC AND MULTI-CHIP SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Reactivated for new design as of 10 December 2003. May be used for either new or existing design acquisition

1. SCOPE

1.1 Scope. This specification covers the detail requirements for silicon, break-before-make, monolithic and multi-chip analog switches with drivers. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete part number. For this product, the requirements of MIL-M-38510 have been superseded by MIL-PRF-38535, (see 6.3)

1.2 Part number. The part number should be in accordance with MIL-PRF-38535, and as specified herein.

1.2.1 Device types. The device types should be as follows:

Device type	Circuit
01	Dual channel, 30 Ω, SPST switches
02	Dual channel, 75 Ω, SPST switches
03	Dual channel, 30 Ω, DPST switches
04	Dual channel, 75 Ω, DPST switches
05	Single channel, 30 Ω, SPDT switch
06	Single channel, 75 Ω, SPDT switch
07	Dual channel, 30 Ω, SPDT switches
08	Dual channel, 75 Ω, SPDT switches

NOTE: A channel is defined as a driver with associated switches.

1.2.2 Device class. The device class should be the product assurance level as defined in MIL-PRF-38535.

1.2.3 Case outline. The case outline should be as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	Terminals	Package style
A 1/	GDFP5-F14 or CDFP6-F14	14	Flat pack
C	GDIP1-T14 or CDIP2-T14	14	Dual-in-line
D	GDFP1-F14 or CDFP2-F14	14	Flat pack
E	GDIP1-T16 or CDIP2-T16	16	Dual-in-line
I	MACY1-X10	10	Can
X	CDFP3-F14	14	Flat pack

1/ Inactive package case outline.

Comments, suggestions, or questions on this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAS, 3990 East Broad St., Columbus, OH 43216-5000, or email bipolar@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil.

AMSC N/A FSC 5962

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

1.3 Absolute maximum ratings.

Voltage, negative supply to positive supply [$(+V_{CC}) - (-V_{CC})$]	36 V dc
Voltage, drain to positive supply ($+V_{CC} - V_D$)	33 V dc
Voltage, negative supply to drain [$V_D - (-V_{CC})$]	33 V dc
Voltage, source to drain ($V_D - V_S$)	±22 V dc
Voltage, negative supply to logic supply [$V_L - (-V_{CC})$]	36 V dc
Voltage, input to logic supply ($V_L - V_{IN}$)	8 V dc
Voltage, reference supply to logic supply ($V_L - V_R$)	8 V dc
Voltage, reference supply to input ($V_{IN} - V_R$)	8 V dc
Voltage, negative supply to reference supply [$V_R - (-V_{CC})$]	27 V dc
Voltage, input to reference supply ($V_R - V_{IN}$)	2 V dc
Current, any terminal	30 mA
Lead temperature (soldering, 60 seconds)	+300°C
Junction temperature	+175°C
Storage temperature	-65°C to +150°C

1.4 Recommended operating conditions.

Positive supply voltage ($+V_{CC}$)	+15 V dc
Negative supply voltage ($-V_{CC}$)	- 15 V dc
Reference supply voltage (V_R)	GND
Logic supply voltage (V_L)	+5 V dc
Ambient operating temperature range (T_A)	$-55°C \leq T_A \leq +125°C$

1.5 Power and thermal characteristics.

Case outline	Maximum allowable power dissipation	Maximum θ_{JC}	Maximum θ_{JA}
C, E	400 mW @ T_A = 125°C	35°C/W	120°C/W
D, A	350 mW @ T_A = 125°C	60°C/W	140°C/W
I	350 mW @ T_A = 125°C	40°C/W	140°C/W
X	300 mW @ T_A = 125°C	30°C/W	166°C/W

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Departments of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-38535 - Integrated Circuits (Microcircuits) Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard for Microelectronics.
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

(Copies of these documents are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein the text of this document shall takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Qualification. Microcircuits furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.3 and 6.4).

3.2 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein.

3.3.1 Terminal connections. The terminal connections shall be as specified on figure 1. Switch positions shown are for a high level input logic.

3.3.2 Schematic circuits. The schematic circuits shall be maintained by the manufacturer and made available to the qualifying activity and the preparing activity (DSCC-VA) upon request.

3.3.4 Case outlines. The case outlines shall be as specified in 1.2.3.

3.4 Lead material and finish. The lead material and finish shall be in accordance with MIL-PRF-38535 (see 6.6).

3.5 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended ambient operating temperature range, unless otherwise specified.

3.5.1 Switch operation. The analog switches shall turn “on” with either a low input ($V_R \le V_{IL} \le 0.8$ V) or a high input ($2 \text{ V} \le V_{IH} \le V_L$) as follows:

Device type	V_{IN}	Switch ON	Switch OFF
01, 02	0.8 V dc	1,2	----
	2.0 V dc	----	1,2
03, 04	0.8 V dc	----	1,2,3,4
	2.0 V dc	1,2,3,4	----
05, 06	0.8 V dc	2	1
	2.0 V dc	1	2
07, 08	0.8 V dc	3,4	1,2
	2.0 V dc	1,2	3,4

3.6 Electrical test requirements. Electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.8 Marking. Marking shall be in accordance with MIL-PRF-38535.

3.9 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 94 (see MIL-PRF-38535, appendix A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Characteristic	Symbol	Conditions 1/ (unless otherwise specified, V_L = +5 V, V_R = GND and $\pm V_{CC}$ = ±15 V	Temperature range	Device type	Limits		Unit
					Min	Max	
Resistance drain-to-source (on)	R_{DS}	V_{IN} = (see 3.5.1), V_D = -7.5 V, I_S = -10 mA	-55°C ≤ T_A ≤ 125°C	01, 03, 05, 07		60	Ω
		V_{IN} = (see 3.5.1), V_D = -10 V, I_S = -10 mA		02, 04, 06, 08		150	
Source leakage current (off)	$I_{S(OFF)}$	V_{IN} = (see 3.5.1), V_D = -10 V, V_S = 10 V, $+V_{CC}$ = 10 V, $-V_{CC}$ = -20 V	-55°C ≤ T_A ≤ 125°C	All	-100	100	nA
		V_{IN} = (see 3.5.1), V_D = -7.5 V, V_S = +7.5 V		01, 03, 05, 07	-100	100	
		V_{IN} = (see 3.5.1), V_D = -10 V, V_S = 10 V		02, 04, 06, 08	-100	100	
Drain leakage current (off)	$I_{D(OFF)}$	V_{IN} = (see 3.5.1), V_D = 10 V, V_S = -10 V, $+V_{CC}$ = 10 V, $-V_{CC}$ = -20 V	-55°C ≤ T_A ≤ 125°C	All	-100	100	nA
		V_{IN} = (see 3.5.1), V_D = 7.5 V, V_S = -7.5 V		01, 03, 05, 07	-100	100	
		V_{IN} = (see 3.5.1), V_D = 10 V, V_S = -10 V		02, 04, 06, 08	-100	100	
Channel leakage current (on)	$I_{D(ON)+}$ $I_{S(ON)}$	V_{IN} = (see 3.5.1), V_D = V_S = -7.5 V	-55°C ≤ T_A ≤ 125°C	01, 03, 05, 07	-200	200	nA
		V_{IN} = (see 3.5.1), V_D = V_S = -10 V		02, 04, 06, 08	-200	200	
Low level input current	I_{IL}	V_{IN} = GND	-55°C ≤ T_A ≤ 125°C	All	-250	-0.1	µA
High level input current	I_{IH}	V_{IN} = 5 V	-55°C ≤ T_A ≤ 125°C	All	-2	20	µA
Time to turn on	t_{ON}	See figure 5	T_A = -55°C	01, 03, 05, 07		150	ns
			T_A = 25°C			150	
			T_A = 125°C			300	
Time to turn on	t_{ON}	See figure 5	T_A = -55°C	02, 04, 06, 08		250	ns
			T_A = 25°C			250	
			T_A = 125°C			350	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics – Continued.

Characteristic	Symbol	Conditions 1/ (unless otherwise specified, V_L = +5 V, V_R = GND and $\pm V_{CC}$ = ±15 V	Temperature range	Device type	Limits		Unit
					Min	Max	
Time to turn off	t_{OFF}	See figure 5	T_A = -55°C	All		130	ns
			T_A = 25°C			130	
			T_A = 125°C			200	
Positive supply current	$+I_{CC}$	V_{IN} = GND and 5 V	-55°C ≤ T_A ≤ 125°C	01, 02, 07, 08		2.5	mA
				05, 06		1.4	
		V_{IN} = GND		03, 04		5	
		V_{IN} = 5 V				1.7	
Negative supply current	$-I_{CC}$	V_{IN} = GND and 5 V	-55°C ≤ T_A ≤ 125°C	01, 02, 07, 08	-8		mA
				05, 06	-4.8		
		V_{IN} = GND		03, 04	-8.8		
		V_{IN} = 5 V			-6.4		
Logic supply current	I_L	V_{IN} = GND and 5 V	-55°C ≤ T_A ≤ 125°C	01, 02, 03, 04, 07, 08		7	mA
				05, 06		5	
Reference supply current	I_R	V_{IN} = GND and 5 V	-55°C ≤ T_A ≤ 125°C	All	-2.2		mA
Charge transfer error	V_{CTE}	V_S = GND (See table III footnote 3/)	T_A = 25°C	All		20	mV
Crosstalk between channels	V_{CT} 2/	f = 10 MHz, V_{gen} = 1 V_{P-P}	T_A = 25°C	All	60		dB
Single channel isolation	V_{ISO}	f = 10 MHz, V_{gen} = 1 V_{P-P}	T_A = 25°C	All	50		dB
Break-before-make time delay	t_D	See figure 6	-55°C ≤ T_A ≤ 125°C	05, 06, 07, 08	5		ns

1/ Test conditions are specified in table III and figures 2, 3, 4, and 5.
2/ For monolithic devices only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-PRF-38535 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters	1	1
Final electrical test parameters	1*, 2, 3, 9	1*, 2, 3, 9
Group A test requirements	1,2,3,(4,7)**, 9,10,11, (12)***	1,2,3,(4,7)**, 9,10,11, (12)***
Group B electrical test parameters when using the method 5005 QCI option	1,2,3 and table IV delta limits	N/A
Group C end-point electrical parameters	1,2,3 and table IV delta limits	1 and table IV delta limits
Additional electrical subgroups for group C periodic inspections	N/A	(4, 7)****
Group D end-point electrical parameters	1,2,3	1
Additional electrical subgroups for group D periodic inspections	(4,7)*****	None

* PDA applies to subgroup 1.
** See 4.4.1d
*** See 4.4.1c
**** See 4.4.3c
***** See 4.4.4

4. VERIFICATION.

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not effect the form, fit, or function as function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. The burn-in test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

b. Reverse bias burn-in (method 1015 of MIL-STD-883). This screen shall apply to class S only. However, regardless of device class, for device types 05, 06, 07, and 08, an additional burn-in will be performed following an interim electrical test (see table II, PDA applies). The additional burn-in will be performed with the logic level of the switch drivers opposite to that used in the first burn-in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

c. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

d. Additional screening for space level product shall be as specified in MIL-PRF-38535.

e. Internal visual inspection (method 2010 and method 2017 multichip criteria of MIL-STD-883). For multichip devices, internal visual inspection shall be performed for each chip within the package.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-38535.

4.4 Technology Conformance inspection (TCI). Technology conformance inspection shall be in accordance with MIL-PRF-38535 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table III of MIL-PRF-38535 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 5, 6, and 8 shall be omitted.

c. Subgroup 12 (device types 05, 06, 07, and 08) shall be added to group A inspection as specified in table III herein. The sample size series number shall be 7 for all classes (accept on 0).

d. Subgroups 4 and 7 shall be performed for initial qualification only using a sample of 5 devices for each device type submitted to group A inspection, with no failure allowed. If not more than 1 failure is found in the first sample of 5, a second sample of 5 is permitted with no further failures allowed.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of MIL-PRF-38535.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table IV of MIL-PRF-38535 and as follows:

a. End point electrical parameters shall be as specified in table II herein.

b. The steady-state life test duration, test condition, and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document control by the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

c. A special subgroup shall be added to group C inspection for class B devices only, and it shall consist of the group A subgroups 4 and 7 as specified in table III herein. This special subgroup shall be performed on each device type that is qualified from those listed in 1.2.1 herein. After initial qualification, the special subgroup shall be performed periodically on a single device type selected from those device types previously qualified. A sample of 5 devices (of the device type to be inspected) shall be chosen and submitted to test with no failures allowed. If not more than 1 failure is found in the first sample of 5, a second sample of 5 is permitted with no further failures allowed. When more than one device type is qualified, the single device type selected shall be different device type for each subsequent periodic inspection until all qualified device types have been inspected. The sequence of single device types shall be repeated to fulfill the periodic inspection requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device type 01 and 02


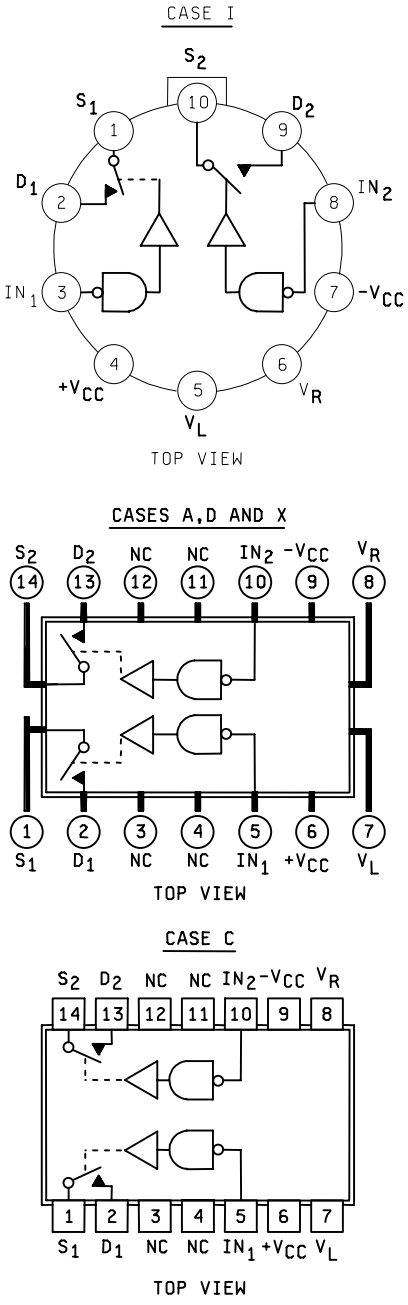


Figure 1. Terminal connections.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device type 03 and 04

CASES A,D AND X

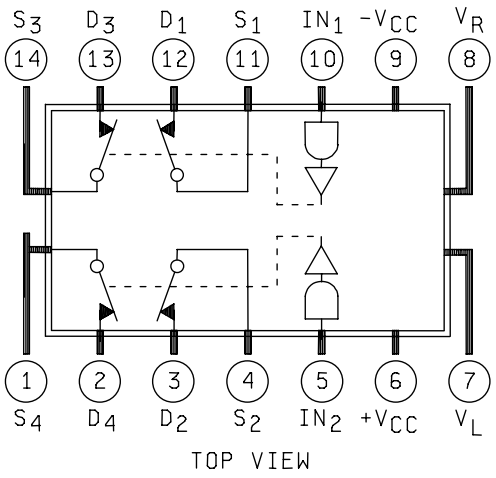

CASE E

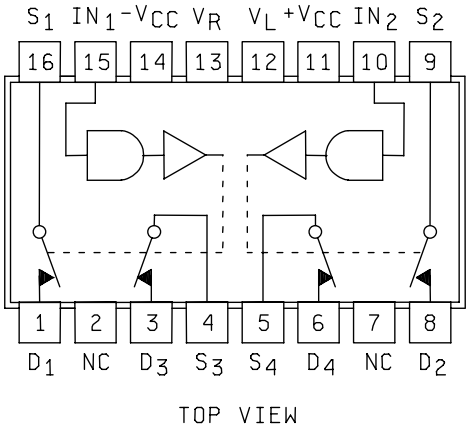


NOTES:
1. Switch positions are shown for the high logic level input condition.
2. $-V_{CC}$ may be connected to the base of metal packages (case I).

Figure 1. Terminal connections – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.


Device type 05 and 06

CASE I

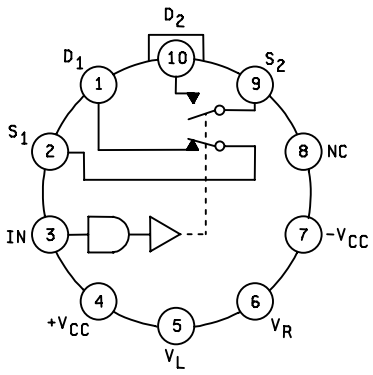


TOP VIEW

CASES A,D AND X

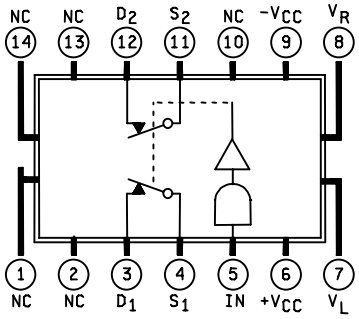

TOP VIEW

CASE C



TOP VIEW


NOTES:
1. Switch positions are shown for the high logic level input condition.
2. $-V_{CC}$ may be connected to the base of metal packages (case I).

Figure 1. Terminal connections – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

Device type 07 and 08

CASES A,D AND X

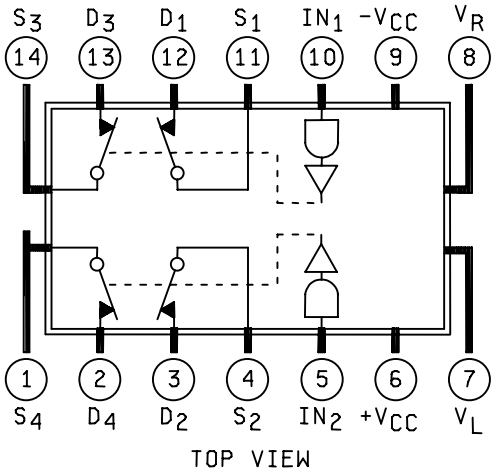

CASE E

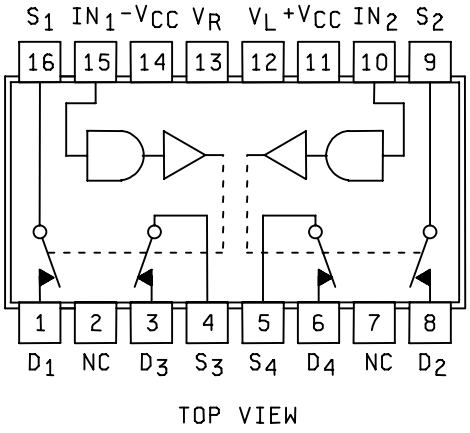

NOTES:
1. Switch positions are shown for the high logic level input condition.
2. $-V_{CC}$ may be connected to the base of metal packages (case I).

Figure 1. Terminal connections – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

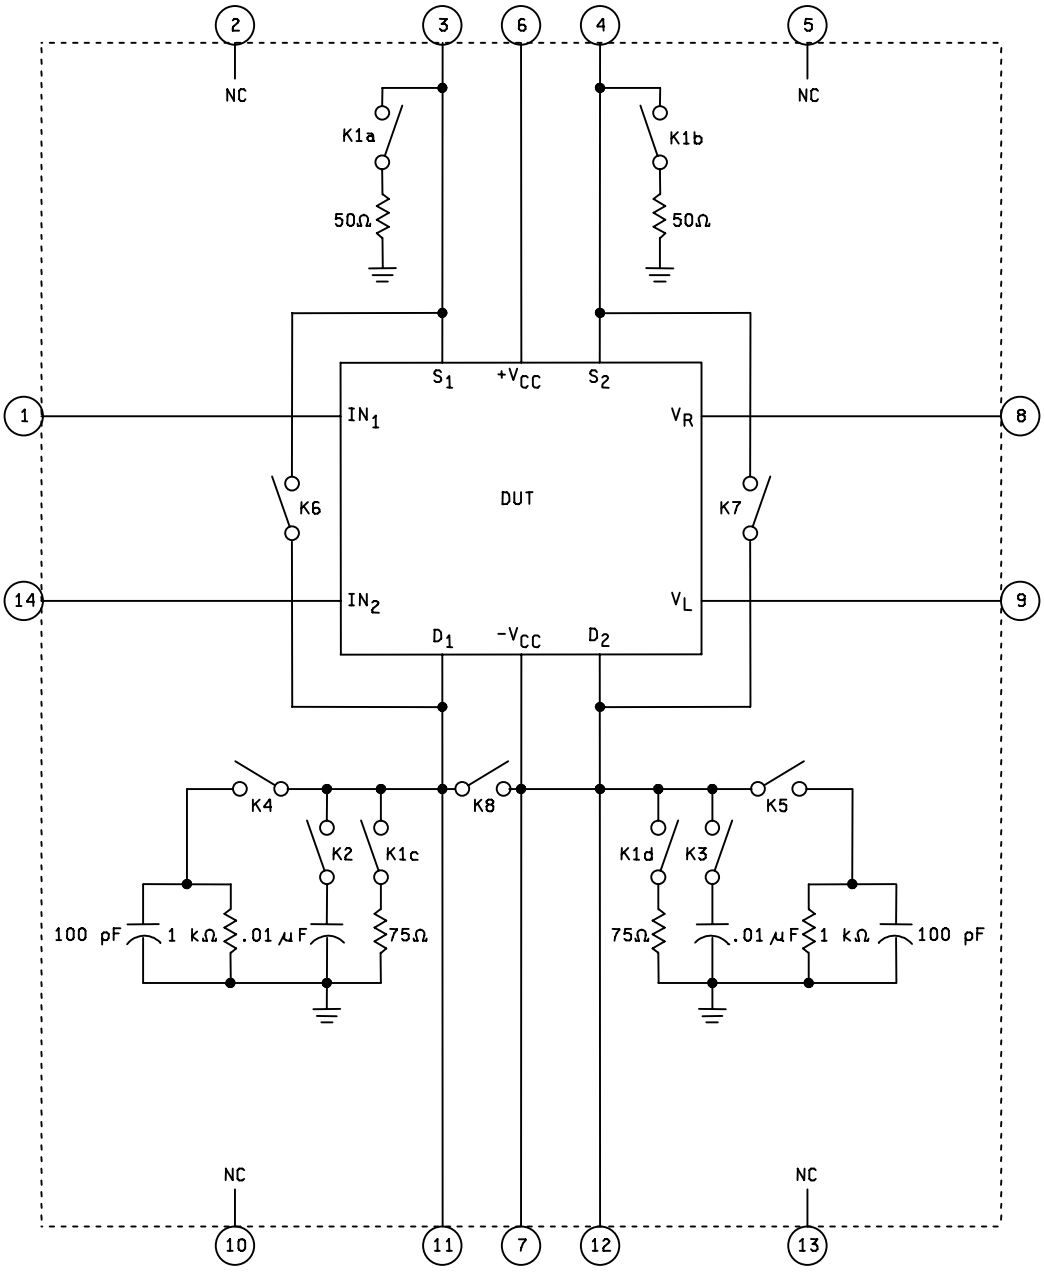


FIGURE 2. Test circuit (static and dynamic tests) for device types 01 and 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

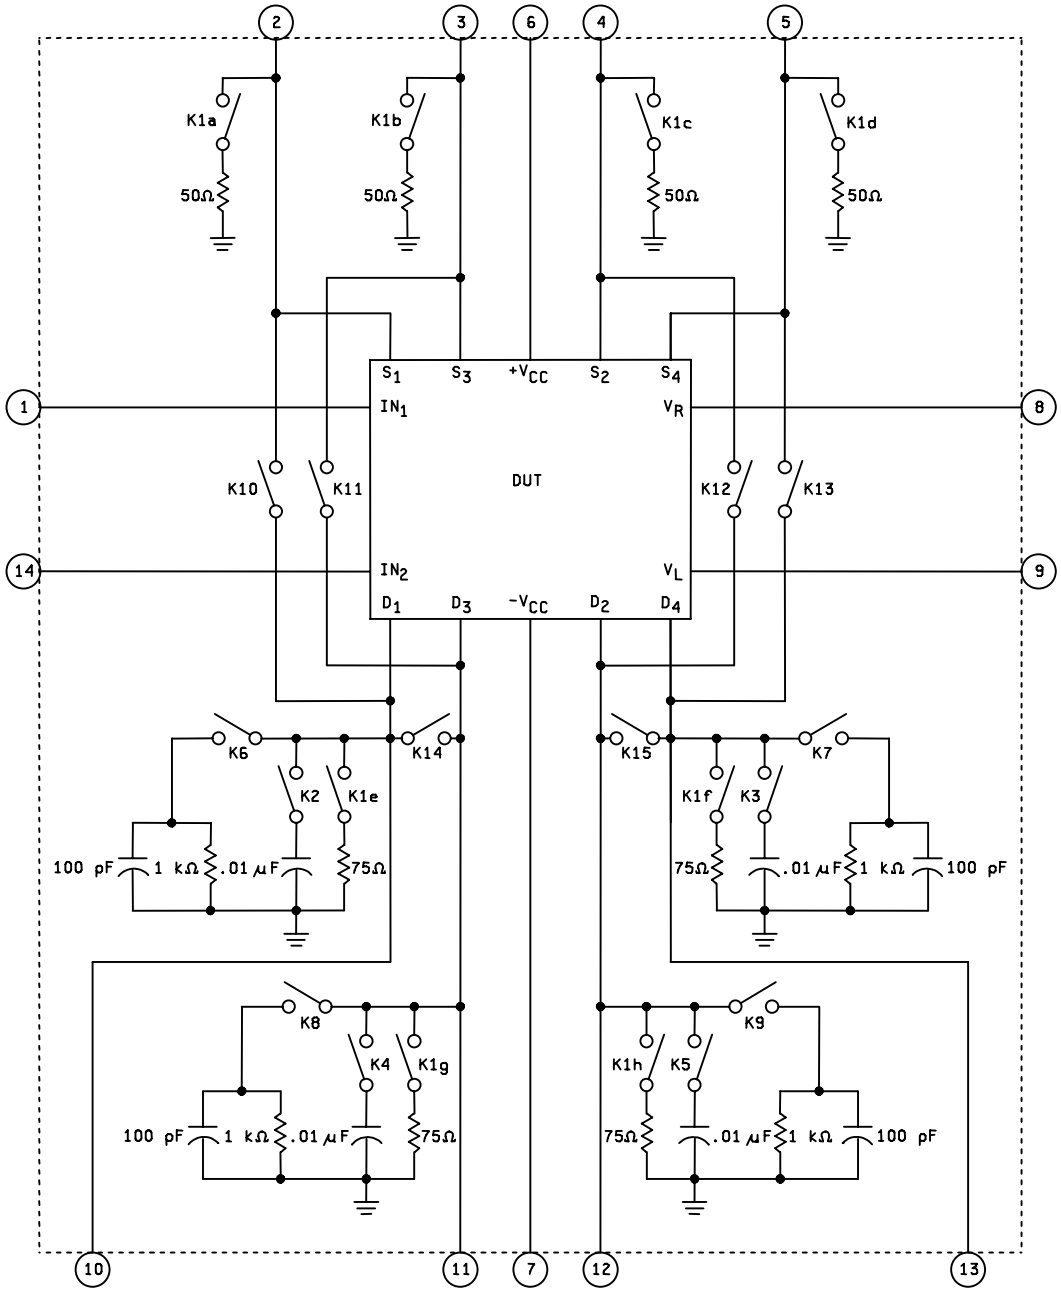


FIGURE 3. Test circuit (static and dynamic tests) for device types 03, 04, 07, and 08.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.


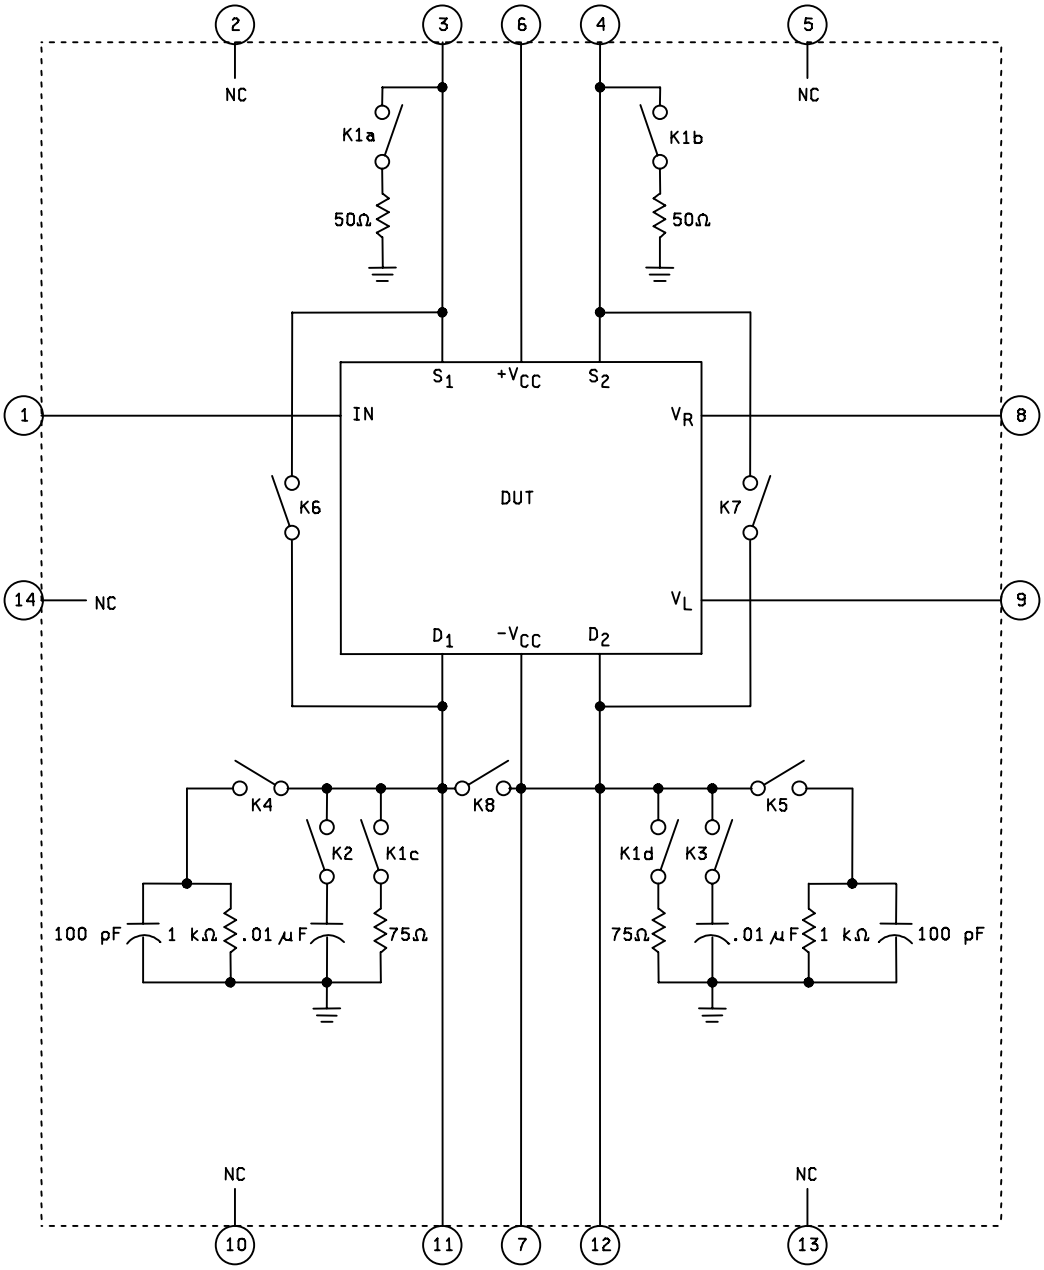


FIGURE 4. Test circuit (static and dynamic tests) for device types 05 and 06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

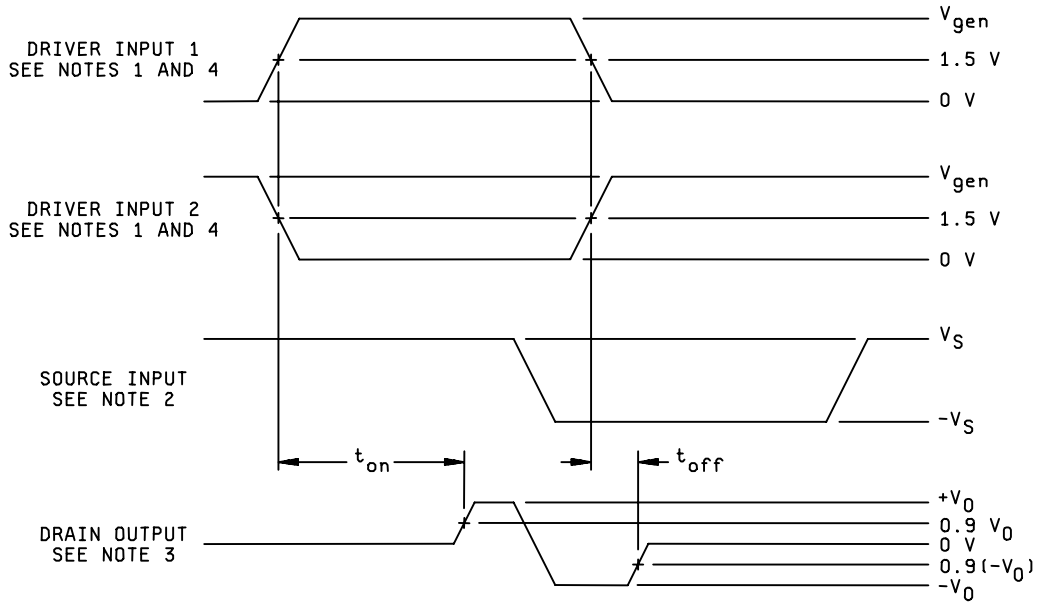

NOTES:

1. The driver pulse generator shall have the following characteristics:

   a. V_{gen} = 0 V to 3.0 V.
   b. Rise time (0.3 V to 2.7 V) ≤ 10 ns
   c. Fall time (2.7 V to 0.3 V) ≤ 10 ns

2. The source pulse generator shall have the following characteristics:

   a. V_{gen} = -7.5 V to +7.5 V square wave (device types 01, 03, 05, and 07).
   b. V_{gen} = -10 V to +10 V square wave (device types 02, 04, 06, and 08).

FIGURE 5. Input-output waveforms for time delay tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

3. For device types 01, 03, 05, and 07:

   a. V_{source} = +7.5 V for T_{on}.
   b. V_{source} = -7.5 V for T_{off}.

   For device types 02, 04, 06, and 08:

   a. V_{source} = +10.0 V for T_{on}.
   b. V_{source} = -10.0 V for T_{off}.

4. Driver input 1 shall be used to test all switches for device types 03 and 04, switch 1 for device types 05 and 06 and switches 1 and 2 for device types 07 and 08. Driver input 2 shall be used to test all switches for device types 01 and 02, switch 2 for device types 05 and 06 and switches 3 and 4 for device types 07 and 08.

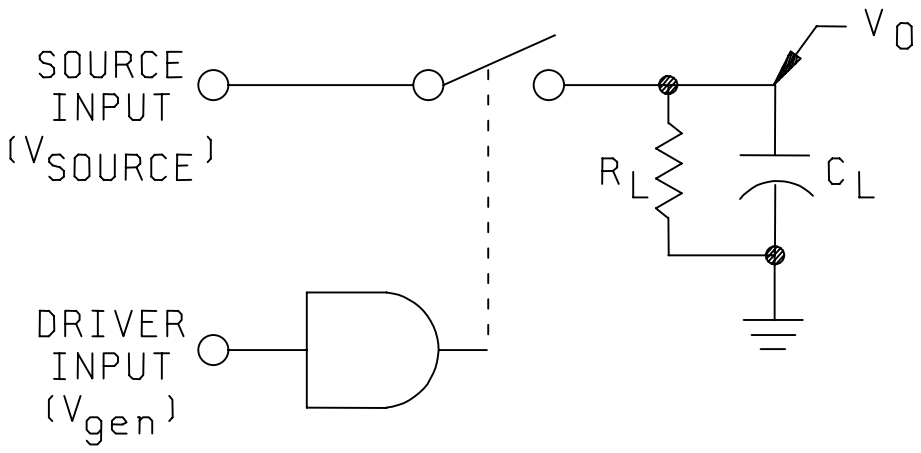


FIGURE 5. Input-output waveforms for time delay tests – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

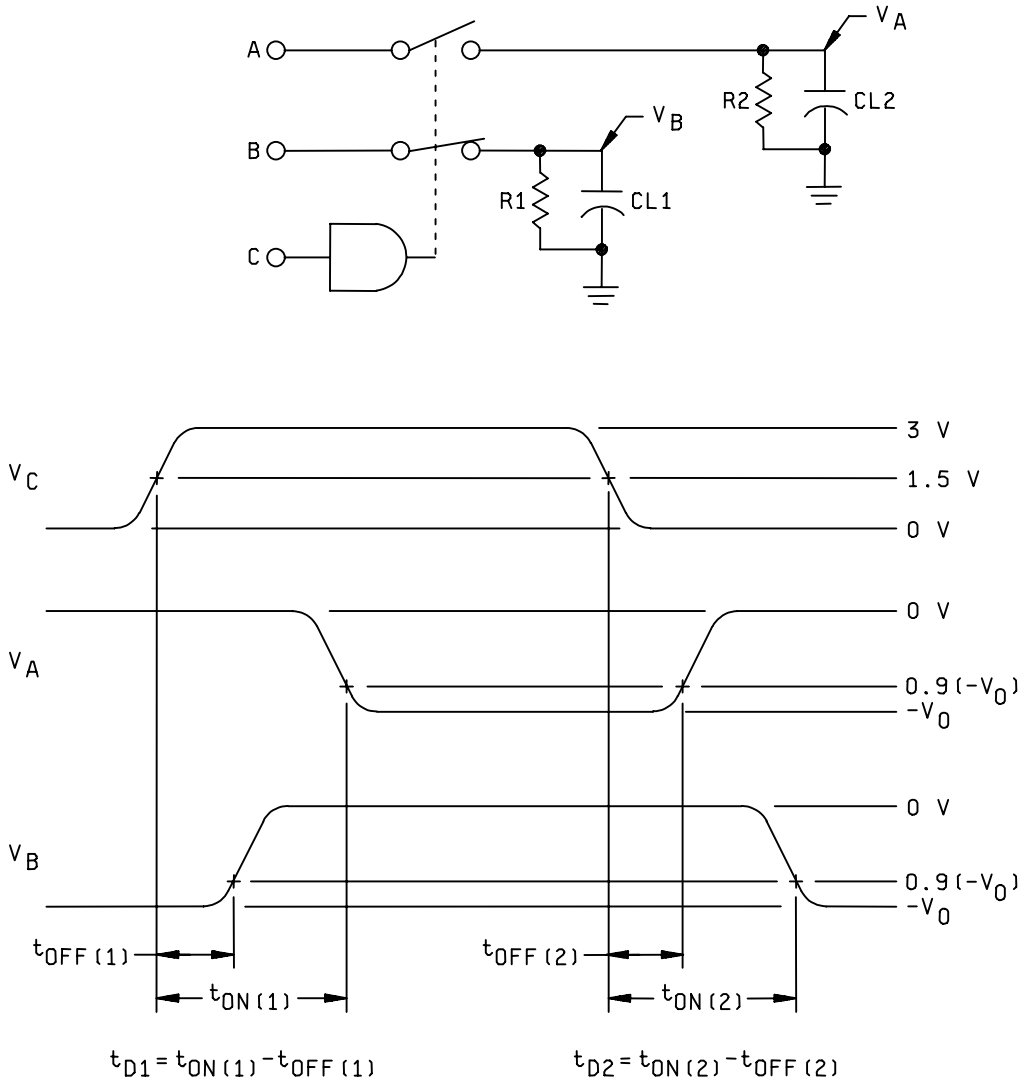


FIGURE 6. Break-before-make test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

NOTES:

1. R1 = R2 = 1 kΩ ± 5%. $C_{L1} = C_{L2}$ = (95-200) pF ± 5%, to include test and fixture capacitance.
2. Both TD1 and TD2 shall be measured. These measurements shall apply only to device types 05, 06, 07, and 08. See 3.5.1 for switch conditions.
3. V_{source} = -7.5 V (for T_{on} and T_{off} – Device types 05 and 07).
   V_{source} = -10.0 V (for T_{on} and T_{off} – Device types 06 and 08).
4. V_O = -7.2 V (device types 05 and 07).
   V_O = -9.2 V (device types 06 and 08).
5. The driver pulse generator shall have the following characteristics:

   a. V_{gen} = 0 V to 3.0 V.
   b. Rise time (0.3 V to 2.7 V) ≤ 10 ns.
   c. Fall time (2.7 V to 0.3 V) ≤ 10 ns.

6. Break-before-make performance: The device types 05, 06, 07 and 08 all operate in the break-before-make mode at room temperature (25° ± 3°C) and higher (to 125° ± 3°C). Break-before-make performance is defined as a difference between T_{on} and T_{off} of ≥ 5 ns when two switches driven by a common driver are switching a common analog signal. T_{on} and T_{off} are measured as shown in figure 6. Below room temperture, it is possible that under negative analog voltage conditions, break-before-make action may not occur.

FIGURE 6. Break-before-make test – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2			Min	Max	
1	R_{DS}	1	0.8 V		-10 mA			15 V	-15 V	GND	5.0 V		-7.5 V				None	3	-7.8		V 2/
T_A =+25°C	R_{DS}	2				-10 mA		15 V	-15 V	"	"			-7.5 V		0.8 V	"	4	-7.8		V 2/
	$I_{S(OFF)}$	3	2.0 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-1	1	nA
	"	4				10 V		10 V	-20 V	"	"			-10 V		2.0 V	"	4	-1	1	nA
	"	5	2.0 V		7.5 V			15 V	-15 V	"	"		-7.5 V				"	3	-1	1	nA
	"	6				7.5 V		15 V	-15 V	"	"			-7.5 V		2.0 V	"	4	-1	1	nA
	$I_{D(OFF)}$	7	2.0 V		-10 V			10 V	-20 V	"	"		10 V				"	11	-1	1	nA
	"	8				-10 V		10 V	-20 V	"	"			10 V		2.0 V	"	12	-1	1	nA
	"	9	2.0 V		-7.5 V			15 V	-15 V	"	"		7.5 V				"	11	-1	1	nA
	"	10				-7.5 V		15 V	-15 V	"	"			7.5 V		2.0 V	"	12	-1	1	nA
	$I_{D(ON)}$	11	0.8 V		-7.5 V			15 V	-15 V	"	"		7.5 V				K6	3	-2	2	nA
	$+I_{S(ON)}$	12				-7.5 V		"	"	"	"			-7.5 V		0.8 V	K7	4	-2	2	nA
	I_{IL}	13	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	14						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	15	5.0 V					"	"	"	"						"	1	-1	10	µA
	I_{IH}	16						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	17	GND					"	"	"	"					GND	"	6		1.5	mA
	$+I_{CC}$	18	5.0 V					"	"	"	"					5.0 V	"	6		1.5	"
	$-I_{CC}$	19	GND					"	"	"	"					GND	"	7	-5		"
	$-I_{CC}$	20	5.0 V					"	"	"	"					5.0 V	"	7	-5		"
	I_L	21	GND					"	"	"	"					GND	"	9		4.5	"
	I_L	22	5.0 V					"	"	"	"					5.0 V	"	9		4.5	"
	I_R	23	GND					"	"	"	"					GND	"	8	-2.2		"
	I_R	24	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		"
2	R_{DS}	25	0.8 V		-10 mA			"	"	"	"		-7.5 V				"	3	-8.1		V 2/
T_A =+125°C	R_{DS}	26				-10 mA		"	"	"	"			-7.5 V		0.8 V	"	4	-8.1		V 2/

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2			Min	Max	
2	$I_{S(OFF)}$	27	2.0 V		10 V			10 V	-20 V	GND	5.0 V		-10 V				None	3	-100	100	nA
T_A =+125°C		28				10 V		10 V	-20 V	"	"			-10 V		2.0 V	"	4	"	"	"
		29	2.0 V		7.5 V			15 V	-15 V	"	"		7.5 V				"	3	"	"	"
		30				7.5 V		15 V	-15 V	"	"			7.5 V		2.0 V	"	4	"	"	"
	$I_{D(OFF)}$	31	2.0 V		-10 V			10 V	-20 V	"	"		10 V				"	11	"	"	"
		32				-10 V		10 V	-20 V	"	"			10 V		2.0 V	"	12	"	"	"
		33	2.0 V		-7.5 V			15 V	-15 V	"	"		7.5 V				"	11	"	"	"
		34				-7.5 V		15 V	-15 V	"	"			7.5 V		2.0 V	"	12	"	"	"
	$I_{D(ON)}$	35	0.8 V		-7.5 V			15 V	-15 V	"	"		7.5 V				K6	3	-200	200	"
	$+I_{S(ON)}$	36				-7.5 V		"	"	"	"			-7.5 V		0.8 V	K7	4	-200	200	"
	I_{IL}	37	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	38						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	39	5.0 V					"	"	"	"						"	1	-2	20	µA
	I_{IH}	40						"	"	"	"					5.0 V	"	14	-2	20	µA
	$+I_{CC}$	41	GND					"	"	"	"					GND	"	6		1.5	mA
	$+I_{CC}$	42	5.0 V					"	"	"	"					5.0 V	"	6		1.5	mA
	$-I_{CC}$	43	GND					"	"	"	"					GND	"	7	-5		mA
	$-I_{CC}$	44	5.0 V					"	"	"	"					5.0 V	"	7	-5		mA
	I_L	45	GND					"	"	"	"					GND	"	9		4.5	mA
	I_L	46	5.0 V					"	"	"	"					5.0 V	"	9		4.5	mA
	I_R	47	GND					"	"	"	"					GND	"	8	-2.2		mA
	I_R	48	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		mA
3	R_{DS}	49	0.8 V		-10 mA			15 V	-15 V	"	"		-7.5 V				"	3	-7.8		V 2/
T_A =-55°C	R_{DS}	50				-10 mA		15 V	-15 V	"	"			-7.5 V		0.8 V	"	4	-7.8		V 2/
	$I_{S(OFF)}$	51	2.0 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-100	100	nA
	"	52				10 V		10 V	-20 V	"	"			-10 V		2.0 V	"	4	"	"	"
	"	53	2.0 V		7.5 V			15 V	-15 V	"	"		-7.5 V				"	3	"	"	"
	"	54				7.5 V		15 V	-15 V	"	"			-7.5 V		2.0 V	"	4	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2			Min	Max	
3 T_A =-55°C	$I_{D(OFF)}$	55	2.0 V		-10 V			10 V	-20 V	GND	5.0 V		10 V				None	11	-100	100	nA
		56				-10 V		10 V	-20 V	"	"			10 V		2.0 V	"	12	-100	100	"
		57	2.0 V		-7.5 V			15 V	-15 V	"	"		7.5 V				"	11	-100	100	"
		58				-7.5 V		15 V	-15 V	"	"			7.5 V		2.0 V	"	12	-100	100	"
	$I_{D(ON)}$ $+I_{S(ON)}$	59	0.8 V		-7.5 V			15 V	-15 V	"	"		7.5 V				K6	3	-200	200	"
		60				-7.5 V		15 V	-15 V	"	"			-7.5 V		0.8 V	K7	4	-200	200	"
	I_{IL}	61	GND					15 V	-15 V	"	"						None	1	-250	-0.1	µA
	I_{IL}	62						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	63	5.0 V					"	"	"	"						"	1	-1	10	µA
	I_{IH}	64						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	65	GND					"	"	"	"						GND	6		2.5	mA
	$+I_{CC}$	66	5.0 V					"	"	"	"						5.0 V	6		2.5	"
	$-I_{CC}$	67	GND					"	"	"	"						GND	7	-8		"
	$-I_{CC}$	68	5.0 V					"	"	"	"						5.0 V	7	-8		"
	I_L	69	GND					"	"	"	"						GND	9		7	"
	I_L	70	5.0 V					"	"	"	"						5.0 V	9		7	"
	I_R	71	GND					"	"	"	"						GND	8	-2		"
	I_R	72	5.0 V					"	"	"	"						5.0 V	8	-2		"
4 T_A = 25°C	V_{CTE}	73	IN 3/		GND			"	"	"	"						K2	11		20	mV_{p-p}
	V_{CTE}	74				GND		"	"	"	"					IN 3/	K3	12		20	mV_{p-p}
7 T_A = 25°C	V_{CT} 7/	75	0.8		IN 4/ $dB_{CT} = -20 \log (V_{OUT}/V_{IN})$			15 V	-15 V	GND	5.0 V					2.0 V	K1	12	60	1.0	mV_{p-p} dB
	V_{ISO}	76	2.0 V		IN 4/			15 V	-15 V	GND	5.0 V						K1	11		3.16	mV_{p-p}
	V_{ISO}	77				IN 4/ $dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$		15 V	-15 V	GND	5.0 V					2.0 V	K1	12	50	3.16	mV_{p-p} dB
9 T_A = 25°C	t_{ON}	78	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	1 to11		150	ns
	t_{ON}	79				IN		"	"	"	"			OUT		IN	K5	14 to12		150	ns
	t_{OFF}	80	IN		IN			"	"	"	"		OUT				K4	1 to 11		130	ns
	t_{OFF}	81				IN		"	"	"	"			OUT		IN	K5	14 to 12		130	ns
10 T_A = +125°C	t_{ON}	82	IN		IN			"	"	"	"		OUT				K4	1 to11		300	ns
	t_{ON}	83				IN		"	"	"	"			OUT		IN	K5	14 to12		300	"
	t_{OFF}	84	IN		IN			"	"	"	"		OUT				K4	1 to 11		200	"
	t_{OFF}	85				IN		"	"	"	"			OUT		IN	K5	14 to 12		200	"
11 T_A = -55°C	t_{ON}	86	IN		IN			"	"	"	"		OUT				K4	1 to11		150	"
	t_{ON}	87				IN		"	"	"	"			OUT		IN	K5	14 to12		150	"
	t_{OFF}	88	IN		IN			"	"	"	"		OUT				K4	1 to 11		130	"
	t_{OFF}	89				IN		"	"	"	"			OUT		IN	K5	14 to 12		130	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2			Min	Max	
1	R_{DS}	1	0.8 V		-10 mA			15 V	-15 V	GND	5.0 V		-10 V				None	3	-10.75		V 2/
T_A =+25°C	R_{DS}	2				-10 mA		15 V	-15 V	"	"			-10 V		0.8 V	"	4	-10.75		V 2/
	$I_{S(OFF)}$	3	2.0 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-1	1	nA
	"	4				10 V		10 V	-20 V	"	"			-10 V		2.0 V	"	4	-1	1	"
	"	5	2.0 V		10 V			15 V	-15 V	"	"		-10 V				"	3	-1	1	"
	"	6				10 V		15 V	-15 V	"	"			-10 V		2.0 V	"	4	-1	1	"
	$I_{D(OFF)}$	7	2.0 V		-10 V			10 V	-20 V	"	"		10 V				"	11	-1	1	"
	"	8				-10 V		10 V	-20 V	"	"			10 V		2.0 V	"	12	-1	1	"
	"	9	2.0 V		-10 V			15 V	-15 V	"	"		10 V				"	11	-1	1	"
	"	10				-10 V		15 V	-15 V	"	"			10 V		2.0 V	"	12	-1	1	"
	$I_{D(ON)+}$ $I_{S(ON)}$	11	0.8 V		-10 V			15 V	-15 V	"	"		-10 V				K6	3	-2	2	"
		12				-10 V		"	"	"	"			-10 V		0.8 V	K7	4	-2	2	"
	I_{IL}	13	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	14						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	15	5.0 V					"	"	"	"						"	1	-1	10	µA
	I_{IH}	16						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	17	GND					"	"	"	"					GND	"	6		1.5	mA
	$+I_{CC}$	18	5.0 V					"	"	"	"					5.0 V	"	6		1.5	"
	$-I_{CC}$	19	GND					"	"	"	"					GND	"	7	-5		"
	$-I_{CC}$	20	5.0 V					"	"	"	"					5.0 V	"	7	-5		"
	I_L	21	GND					"	"	"	"					GND	"	9		4.5	"
	I_L	22	5.0 V					"	"	"	"					5.0 V	"	9		4.5	"
	I_R	23	GND					"	"	"	"					GND	"	8	-2.2		"
	I_R	24	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		"
2	R_{DS}	25	0.8 V		-10 mA			15 V	-15 V	"	"		-10 V				"	3	-11.50		V 2/
T_A =+125°C	R_{DS}	26				-10 mA		15 V	-15 V	"	"			-10 V		0.8 V	"	4	-11.50		V 2/
	$I_{S(OFF)}$	27	2.0 V		10 V			10 V	-20 V	GND	5.0 V		-10 V				None	3	-100	100	nA
		28				10 V		10 V	-20 V	"	"			-10 V		2.0 V	"	4	-100	100	nA
		29	2.0 V		10 V			15 V	-15 V	"	"		-10 V				"	3	-100	100	nA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2			Min	Max	
2	$I_{S(OFF)}$	30				10 V		15 V	-15 V	GND	5.0 V			-10 V		2.0 V	None	4	-100	100	nA
T_A =+125°C	$I_{D(OFF)}$	31	2.0 V		-10 V			10 V	-20 V	"	"		10 V				"	11	"	"	"
		32				-10 V		10 V	-20 V	"	"			10 V		2.0 V	"	12	"	"	"
		33	2.0 V		-10 V			15 V	-15 V	"	"		10 V				"	11	"	"	"
		34				-10 V		15 V	-15 V	"	"			10 V		2.0 V	"	12	"	"	"
	$I_{D(ON)+}$	35	0.8 V		-10 V			15 V	-15 V	"	"		-10 V				K6	3	-200	200	"
	$I_{S(ON)}$	36				-10 V		"	"	"	"			-10 V		0.8 V	K7	4	-200	200	"
	I_{IL}	37	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	38						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	39	5.0 V					"	"	"	"						"	1	-2	20	µA
	I_{IH}	40						"	"	"	"					5.0 V	"	14	-2	20	µA
	$+I_{CC}$	41	GND					"	"	"	"					GND	"	6		1.5	mA
	$+I_{CC}$	42	5.0 V					"	"	"	"					5.0 V	"	6		1.5	mA
	$-I_{CC}$	43	GND					"	"	"	"					GND	"	7	-5		mA
	$-I_{CC}$	44	5.0 V					"	"	"	"					5.0 V	"	7	-5		mA
	I_L	45	GND					"	"	"	"					GND	"	9		4.5	mA
	I_L	46	5.0 V					"	"	"	"					5.0 V	"	9		4.5	mA
	I_R	47	GND					"	"	"	"					GND	"	8	-2.2		mA
	I_R	48	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		mA
3	R_{DS}	49	0.8 V		-10 mA			15 V	-15 V	"	"		-10 V				"	3	-10.75		V 2/
T_A =-55°C	R_{DS}	50				-10 mA		15 V	-15 V	"	"			-10 V		0.8 V	"	4	-10.75		V 2/
	$I_{S(OFF)}$	51	2.0 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-100	100	nA
	"	52				10 V		10 V	-20 V	"	"			-10 V		2.0 V	"	4	"	"	"
	"	53	2.0 V		10 V			15 V	-15 V	"	"		-10 V				"	3	"	"	"
	"	54				10 V		15 V	-15 V	"	"			-10 V		2.0 V	"	4	"	"	"
	$I_{D(OFF)}$	55	2.0 V		-10 V			10 V	-20 V	GND	5.0 V		10 V				"	11	"	"	"
		56				-10 V		10 V	-20 V	"	"			10 V		2.0 V	"	12	"	"	"
		57	2.0 V		-10 V			15 V	-15 V	"	"		10 V				"	11	"	"	"
		58				-10 V		15 V	-15 V	"	"			10 V		2.0 V	"	12	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 NC	3 S_1	4 S_2	5 NC	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 NC	11 D_1	12 D_2	13 NC	14 IN_2			Min	Max	
3 T_A =-55°C	$I_{D(ON)+}$ $I_{D(ON)+}$	59 60	0.8 V		-10 V	 -10 V		15 V 15 V	-15 V -15 V	GND “	5.0 V “		-10 V	 -10 V		 0.8 V	K6 K7	3 4	-200 -200	200 200	nA nA
	I_{IL} I_{IL}	61 62	GND					“ “	“ “	“ “	“ “					 GND	None “	1 14	-250 -250	-0.1 -0.1	µA µA
	I_{IH} I_{IH}	63 64	5.0 V					“ “	“ “	“ “	“ “					 5.0 V	“ “	1 14	-1 -1	10 10	µA µA
	$+I_{CC}$ $+I_{CC}$	65 66	GND 5.0 V					“ “	“ “	“ “	“ “					GND 5.0 V	“ “	6 6		2.5 2.5	mA “
	$-I_{CC}$ $-I_{CC}$	67 68	GND 5.0 V					“ “	“ “	“ “	“ “					GND 5.0 V	“ “	7 7	-8 -8		“ “
	I_L I_L	69 70	GND 5.0 V					“ “	“ “	“ “	“ “					GND 5.0 V	“ “	9 9		7 7	“ “
	I_R I_R	71 72	GND 5.0 V					“ “	“ “	“ “	“ “					GND 5.0 V	“ “	8 8	-2 -2		“ “
4 T_A = 25°C	V_{CTE} V_{CTE}	73 74	IN 3/		GND	 GND		“ “	“ “	“ “	“ “					 IN 3/	K2 K3	11 12		20 20	mV_{p-p} mV_{p-p}
7 T_A = 25°C	V_{CT} 7/	75	0.8		IN 4/ $dB_{CT} = -20 \log (V_{OUT}/V_{IN})$			“	“	“	“					2.0 V	K1	12	 60	1.0	m_{Vp-p} dB
	V_{ISO} V_{ISO}	76 77	2.0 V		IN 4/ $dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$	 IN 4/		15 V 15 V	-15 V -15 V	GND GND	5.0 V 5.0 V					 2.0 V	K1 K1	11 12	 50	3.16 3.16	mV_{p-p} mV_{p-p} dB
9 T_A = 25°C	t_{ON} t_{ON}	78 79	IN		IN	 IN		15 V “	-15 V “	GND “	5.0 V “		OUT	 OUT		 IN	K4 K5	1 to11 14 to12		250 250	ns “
	t_{OFF} t_{OFF}	80 81	IN		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT		 IN	K4 K5	1 to 11 14 to 12		130 130	“ “
10 T_A = +125°C	t_{ON} t_{ON}	82 83	IN		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT		 IN	K4 K5	1 to11 14 to12		350 350	“ “
	t_{OFF} t_{OFF}	84 85	IN		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT		 IN	K4 K5	1 to 11 14 to 12		200 200	“ “
11 T_A = -55°C	t_{ON} t_{ON}	86 87	IN		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT		 IN	K4 K5	1 to11 14 to12		250 250	“ “
	t_{OFF} t_{OFF}	88 89	IN		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT		 IN	K4 K5	1 to 11 14 to 12		130 130	“ “

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
1 T_A =+25°C	R_{DS}	1	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-7.5 V					None	2	-7.8		V 2/
		2	2.0 V		-10 mA			"	"	"	"		-7.5 V				"	3	-7.8		V 2/
		3				-10 mA		"	"	"	"			-7.5 V		2.0 V	"	4	-7.8		V 2/
		4					-10 mA	"	"	"	"				-7.5 V	2.0 V	"	5	-7.8		V 2/
	$I_{S(OFF)}$	5	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-1	1	nA
		6	0.8 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
		7				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
		8					10 V	"	"	"	"				-10 V	0.8 V	"	5	"	"	"
		9	0.8 V	7.5 V				15 V	-15 V	"	"	-7.5 V					"	2	"	"	"
		10	0.8 V		7.5 V			"	"	"	"		-7.5 V				"	3	"	"	"
		11				7.5 V		"	"	"	"			-7.5 V		0.8 V	"	4	"	"	"
		12					7.5 V	"	"	"	"				-7.5 V	0.8 V	"	5	"	"	"
	$I_{D(OFF)}$	13	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
		14	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		15				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		16					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"
		17	0.8 V	-7.5 V				15 V	-15 V	"	"	7.5 V					"	10	"	"	"
		18	0.8 V		-7.5 V			"	"	"	"		7.5 V				"	11	"	"	"
		19				-7.5 V		"	"	"	"			7.5 V		0.8 V	"	12	"	"	"
		20					-7.5 V	"	"	"	"				7.5 V	0.8 V	"	13	"	"	"
	$I_{D(ON)+}$	21	2.0 V	-7.5 V				"	"	"	"	-7.5 V					K10	2	-2	2	"
	$I_{S(ON)}$	22	2.0 V		-7.5 V			"	"	"	"		-7.5 V				K11	3	-2	2	"
	"	23				-7.5 V		"	"	"	"			-7.5 V		2.0 V	K12	4	-2	2	"
	"	24					-7.5 V	"	"	"	"				-7.5 V	2.0 V	K13	5	-2	2	"
	I_{IL}	25	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	26						"	"	"	"					GND	"	14	-250	-0.1	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
1	I_{IH}	27	5.0 V					15 V	-15 V	GND	5.0 V						None	1	-1	10	µA
T_A =+25°C	I_{IH}	28						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	29	GND					"	"	"	"					GND	"	6		3	mA
	$+I_{CC}$	30	5.0 V					"	"	"	"					5.0 V	"	6		0.1	"
	$-I_{CC}$	31	GND					"	"	"	"					GND	"	7	-5.5		"
	$-I_{CC}$	32	5.0 V					"	"	"	"					5.0 V	"	7	-4		"
	I_L	33	GND					"	"	"	"					GND	"	9		4.5	"
	I_L	34	5.0 V					"	"	"	"					5.0 V	"	9		4.5	"
	I_R	35	GND					"	"	"	"					GND	"	8	-2.2		"
	I_R	36	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		"
2	R_{DS}	37	2.0 V	-10 mA				"	"	"	"	-7.5 V					"	2	-8.1		V 2/
T_A =+125°C		38	2.0 V		-10 mA			"	"	"	"		-7.5 V				"	3	-8.1		V 2/
		39				-10 mA		"	"	"	"			-7.5 V		2.0 V	"	4	-8.1		V 2/
		40					-10 mA	"	"	"	"				-7.5 V	2.0 V	"	5	-8.1		V 2/
	$I_{S(OFF)}$	41	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-100	100	nA
		42	0.8 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
		43				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
		44					10 V	"	"	"	"				-10 V	0.8 V	"	5	"	"	"
		45	0.8 V	7.5 V				15 V	-15 V	"	"	-7.5 V					"	2	"	"	"
		46	0.8 V		7.5 V			"	"	"	"		-7.5 V				"	3	"	"	"
		47				7.5 V		"	"	"	"			-7.5 V		0.8 V	"	4	"	"	"
		48					7.5 V	"	"	"	"				-7.5 V	0.8 V	"	5	"	"	"
	$I_{D(OFF)}$	49	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
		50	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		51				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		52					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"
		53	0.8 V	-7.5 V				15 V	-15 V	"	"	7.5 V					"	10	"	"	"
		54	0.8 V		-7.5 V			"	"	"	"		7.5 V				"	11	"	"	"
		55				-7.5 V		"	"	"	"			7.5 V		0.8 V	"	12	"	"	"
		56					-7.5 V	"	"	"	"				7.5 V	0.8 V	"	13	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
2	$I_{D(ON)+}$	57	2.0 V	-7.5 V				15 V	-15 V	GND	5.0 V	-7.5 V					K10	2	-200	200	nA
T_A =+125°C	$I_{S(ON)}$	58	2. 0 V		-7.5 V			"	"	"	"		-7.5 V				K11	3	-200	200	nA
		59				-7.5 V		"	"	"	"			-7.5 V		2.0 V	K12	4	-200	200	nA
		60					-7.5 V	"	"	"	"				-7.5 V	2.0 V	K13	5	-200	200	nA
	I_{IL}	61	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	62						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	63	5.0 V					"	"	"	"						"	1	-2	20	µA
	I_{IH}	64						"	"	"	"					5.0 V	"	14	-2	20	µA
	$+I_{CC}$	65	GND					"	"	"	"					GND	"	6		3	mA
	$+I_{CC}$	66	5.0 V					"	"	"	"					5.0 V	"	6		0.1	mA
	$-I_{CC}$	67	GND					"	"	"	"					GND	"	7	-5.5		mA
	$-I_{CC}$	68	5.0 V					"	"	"	"					5.0 V	"	7	-4		mA
	I_L	69	GND					"	"	"	"					GND	"	9		4.5	mA
	I_L	70	5.0 V					"	"	"	"					5.0 V	"	9		4.5	mA
	I_R	71	GND					"	"	"	"					GND	"	8	-2.2		mA
	I_R	72	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		mA
3	R_{DS}	73	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-7.5 V					"	2	-7.8		V 2/
T_A = -55°C		74	2.0 V		-10 mA			"	"	"	"		-7.5 V				"	3	-7.8		V 2/
		75				-10 mA		"	"	"	"			-7.5 V		2.0 V	"	4	-7.8		V 2/
		76					-10 mA	"	"	"	"				-7.5 V	2.0 V	"	5	-7.8		V 2/
	$I_{S(OFF)}$	77	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-100	100	nA
		78	0.8 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
		79				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
		80					10 V	"	"	"	"				-10 V	0.8 V	"	5	"	"	"
		81	0.8 V	7.5 V				15 V	-15 V	"	"	-7.5 V					"	2	"	"	"
		82	0.8 V		7.5 V			"	"	"	"		-7.5 V				"	3	"	"	"
		83				7.5 V		"	"	"	"			-7.5 V		0.8 V	"	4	"	"	"
		84					7.5 V	"	"	"	"				-7.5 V	0.8 V	"	5	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
3	$I_{D(OFF)}$	85	0.8 V	-10 V				10 V	-20 V	GND	5.0 V	10 V					None	10	-100	100	nA
T_A = -55°C		86	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		87				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		88					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"
		89	0.8 V	-7.5 V				15 V	-15 V	"	"	7.5 V					"	10	"	"	"
		90	0.8 V		-7.5 V			"	"	"	"		7.5 V				"	11	"	"	"
		91				-7.5 V		"	"	"	"			7.5 V		0.8 V	"	12	"	"	"
		92					-7.5 V	"	"	"	"				7.5 V	0.8 V	"	13	"	"	"
	$I_{D(ON)+}$	93	2.0 V	-7.5 V				"	"	"	"	-7.5 V					K10	2	-200	200	"
	$I_{S(ON)}$	94	2.0 V		-7.5 V			"	"	"	"		-7.5 V				K11	3	"	"	"
	"	95				-7.5 V		"	"	"	"			-7.5 V		2.0 V	K12	4	"	"	"
	"	96					-7.5 V	"	"	"	"				-7.5 V	2.0 V	K13	5	"	"	"
	I_{IL}	97	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	98						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	99	5.0 V					"	"	"	"						"	1	-1	10	µA
	I_{IH}	100						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	101	GND					"	"	"	"					GND	"	6		5	mA
	$+I_{CC}$	102	5.0 V					"	"	"	"					5.0 V	"	6		1.7	mA
	$-I_{CC}$	103	GND					"	"	"	"					GND	"	7	-8.8		mA
	$-I_{CC}$	104	5.0 V					"	"	"	"					5.0 V	"	7	-6.4		mA
	I_L	105	GND					"	"	"	"					GND	"	9		7	mA
	I_L	106	5.0 V					"	"	"	"					5.0 V	"	9		7	mA
	I_R	107	GND					"	"	"	"					GND	"	8	-2		mA
	I_R	108	5.0 V					"	"	"	"					5.0 V	"	8	-2		mA
4	V_{CTE}	109	IN 3/	GND				"	"	"	"						K2	10		20	mV_{p-p}
T_A =+25°C		110	IN 3/		GND			"	"	"	"						K4	11		20	"
		111				GND		"	"	"	"					IN 3/	K5	12		20	"
		112					GND	"	"	"	"					IN 3/	K3	13		20	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
7 T_A =+25°C	V_{CT} 7/ V_{CT} 7/	113 114	2.0 V	5/	5/	6/	6/	15 V 15 V	-15 V -15 V	GND GND	5.0 V 5.0 V					2.0 V	K1 K1	12 or 13 10 or 11		1.0 1.0	mV_{p-p} mV_{p-p}
			dB_{CT} = -20 log (V_{OUT}/V_{IN})																60		dB
	V_{ISO}	115 116 117 118	0.8 V 0.8 V	IN 4/	IN 4/	IN 4/	IN 4/	15 V “ “ “	-15 V “ “ “	GND “ “ “	5.0 V “ “ “					0.8 V 0.8 V	K1 K1 K1 K1	10 11 12 13		3.16 3.16 3.16 3.16	mV_{p-p} “ “ “
			dB_{ISO} = -20 log (V_{OUT}/V_{IN})								“								50		dB
9 T_A =+25°C	t_{ON}	119 120 121 122	IN IN	IN	IN	IN	IN	15 V “ “ “	-15 V “ “ “	GND “ “ “	5.0 V “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		150 150 150 150	ns “ “ “
	t_{OFF}	123 124 125 126	IN IN	IN	IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		130 130 130 130	ns “ “ “
10 T_A =+125°C	t_{ON}	127 128 129 130	IN IN	IN	IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		300 300 300 300	“ “ “ “
	t_{OFF}	131 132 133 134	IN IN	IN	IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		200 200 200 200	“ “ “ “
11 T_A =-55°C	t_{ON}	135 136 137 138	IN IN	IN	IN IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		150 150 150 150	“ “ “ “
	t_{OFF}	139 140 141 142	IN IN	IN	IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		130 130 130 130	“ “ “ “

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
1 T_A =+25°C	R_{DS}	1	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-10 V					None	2	-10.75		V 2/
		2	2.0 V		-10 mA			"	"	"	"		-10 V				"	3	-10.75		V 2/
		3				-10 mA		"	"	"	"			-10 V		2.0 V	"	4	-10.75		V 2/
		4					-10 mA	"	"	"	"				-10 V	2.0 V	"	5	-10.75		V 2/
	$I_{S(OFF)}$	5	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-1	1	nA
		6	0.8 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
		7				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
		8					10 V	"	"	"	"				-10 V	0.8 V	"	5	"	"	"
		9	0.8 V	10 V				15 V	-15 V	"	"	-10 V					"	2	"	"	"
		10	0.8 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
		11				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
		12					10 V	"	"	"	"				-10 V	0.8 V	"	5	"	"	"
	$I_{D(OFF)}$	13	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
		14	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		15				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		16					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"
		17	0.8 V	-10 V				15 V	-15 V	"	"	10 V					"	10	"	"	"
		18	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		19				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		20					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"
	$I_{D(ON)+}$ $I_{S(ON)}$	21	2.0 V	-10 V				"	"	"	"	-10 V					K10	2	-2	2	"
		22	2.0 V		-10 V			"	"	"	"		-10 V				K11	3	-2	2	"
	"	23				-10 V		"	"	"	"			-10 V		2.0 V	K12	4	-2	2	"
	"	24					-10 V	"	"	"	"				-10 V	2.0 V	K13	5	-2	2	"
	I_{IL}	25	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	26						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	27	5.0 V					"	"	"	"						"	1	-1	10	µA
	I_{IH}	28						"	"	"	"					5.0 V	"	14	-1	10	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
1	$+I_{CC}$	29	GND					15 V	-15 V	GND	5.0 V					GND	None	6		3	mA
T_A =+25°C	$+I_{CC}$	30	5.0 V					"	"	"	"					5.0 V	"	6		0.1	"
	$-I_{CC}$	31	GND					"	"	"	"					GND	"	7	-5.5		"
	$-I_{CC}$	32	5.0 V					"	"	"	"					5.0 V	"	7	-4		"
	I_L	33	GND					"	"	"	"					GND	"	9		4.5	"
	I_L	34	5.0 V					"	"	"	"					5.0 V	"	9		4.5	"
	I_R	35	GND					"	"	"	"					GND	"	8	-2.2		"
	I_R	36	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		"
2	R_{DS}	37	2.0 V	-10 mA				"	"	"	"	-10 V					"	2	-11.50		V 2/
T_A =+125°C		38	2.0 V		-10 mA			"	"	"	"		-10 V				"	3	-11.50		V 2/
		39				-10 mA		"	"	"	"			-10 V		2.0 V	"	4	-11.50		V 2/
		40					-10 mA	"	"	"	"				-10 V	2.0 V	"	5	-11.50		V 2/
	$I_{S(OFF)}$	41	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-100	100	nA
		42	0.8 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
		43				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
		44					10 V	"	"	"	"				-10 V	0.8 V	"	5	"	"	"
		45	0.8 V	10 V				15 V	-15 V	"	"	-10 V					"	2	"	"	"
		46	0.8 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
		47				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
		48					10 V	"	"	"	"				-10 V	0.8 V	"	5	"	"	"
	$I_{D(OFF)}$	49	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
		50	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		51				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		52					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"
		53	0.8 V	-10 V				15 V	-15 V	"	"	10 V					"	10	"	"	"
		54	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		55				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		56					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
2 T_A =+125°C	$I_{D(ON)+}$ $I_{S(ON)}$	57 58 59 60	2.0 V 2. 0 V	-10 V	-10 V	-10 V	-10 V	15 V “ “ “	-15 V “ “ “	GND “ “ “	5.0 V “ “ “	-10 V	-10 V	-10 V	-10 V	2.0 V 2.0 V	K10 K11 K12 K13	2 3 4 5	-200 -200 -200 -200	200 200 200 200	nA nA nA nA
	I_{IL} I_{IL}	61 62	GND					“ “	“ “	“ “	“ “					GND	None “	1 14	-250 -250	-0.1 -0.1	µA µA
	I_{IH} I_{IH}	63 64	5.0 V					“ “	“ “	“ “	“ “					5.0 V	“ “	1 14	-2 -2	20 20	µA µA
	$+I_{CC}$ $+I_{CC}$	65 66	GND 5.0 V					“ “	“ “	“ “	“ “					GND 5.0 V	“ “	6 6		3 0.1	mA mA
	$-I_{CC}$ $-I_{CC}$	67 68	GND 5.0 V					“ “	“ “	“ “	“ “					GND 5.0 V	“ “	7 7	-5.5 -4		mA mA
	I_L I_L	69 70	GND 5.0 V					“ “	“ “	“ “	“ “					GND 5.0 V	“ “	9 9		4.5 4.5	mA mA
	I_R I_R	71 72	GND 5.0 V					“ “	“ “	“ “	“ “					GND 5.0 V	“ “	8 8	-2.2 -2.2		mA mA
3 T_A = -55°C	R_{DS}	73 74 75 76	2.0 V 2.0 V	-10 mA	-10 mA	-10 mA	-10 mA	15 V “ “ “	-15 V “ “ “	GND “ “ “	5.0 V “ “ “	-10 V	-10 V	-10 V	-10 V	2.0 V 2.0 V	“ “ “ “	2 3 4 5	-10.75 -10.75 -10.75 -10.75		V 2/ V 2/ V 2/ V 2/
	$I_{S(OFF)}$	77 78 79 80 81 82 83 84	0.8 V 0.8 V 0.8 V 0.8 V 	10 V 10 V 	10 V 10 V 	10 V 10 V 	10 V 10 V 	10 V “ “ “ 15 V “ “ “	-20 V “ “ “ -15 V “ “ “	“ “ “ “ “ “ “ “	“ “ “ “ “ “ “ “	-10 V -10 V 	-10 V -10 V 	-10 V -10 V 	-10 V -10 V	0.8 V 0.8 V 0.8 V 0.8 V	“ “ “ “ “ “ “ “	2 3 4 5 2 3 4 5	-100 “ “ “ “ “ “ “	100 “ “ “ “ “ “ “	nA “ “ “ “ “ “ “

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
3 T_A = -55°C	$I_{D(OFF)}$	85	0.8 V	-10 V				10 V	-20 V	GND	5.0 V	10 V					None	10	-100	100	nA
		86	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		87				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		88					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"
		89	0.8 V	-10 V				15 V	-15 V	"	"	10 V					"	10	"	"	"
		90	0.8 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
		91				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
		92					-10 V	"	"	"	"				10 V	0.8 V	"	13	"	"	"
	$I_{D(ON)+}$	93	2.0 V	-10 V				"	"	"	"	-10 V					K10	2	-200	200	"
	$I_{S(ON)}$	94	2.0 V		-10 V			"	"	"	"		-10 V				K11	3	"	"	"
	"	95				-10 V		"	"	"	"			-10 V		2.0 V	K12	4	"	"	"
	"	96					-10 V	"	"	"	"				-10 V	2.0 V	K13	5	"	"	"
	I_{IL}	97	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	98						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	99	5.0 V					"	"	"	"						"	1	-1	10	µA
	I_{IH}	100						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	101	GND					"	"	"	"					GND	"	6		5	mA
	$+I_{CC}$	102	5.0 V					"	"	"	"					5.0 V	"	6		1.7	mA
	$-I_{CC}$	103	GND					"	"	"	"					GND	"	7	-8.8		mA
	$-I_{CC}$	104	5.0 V					"	"	"	"					5.0 V	"	7	-6.4		mA
	I_L	105	GND					"	"	"	"					GND	"	9		7	mA
	I_L	106	5.0 V					"	"	"	"					5.0 V	"	9		7	mA
	I_R	107	GND					"	"	"	"					GND	"	8	-2		mA
	I_R	108	5.0 V					"	"	"	"					5.0 V	"	8	-2		mA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
4 T_A = +25°C	V_{CTE} “ “ “	109 110 111 112	IN 3/ IN 3/	GND	GND	GND	GND	15 V “ “ “	-15 V “ “ “	GND “ “ “	5.0 V “ “ “					IN 3/ IN 3/	K2 K4 K5 K3	10 11 12 13		20 20 20 20	mV_{p-p} “ “ “
7 T_A =+25°C	V_{CT} 7/ V_{CT} 7/	113 114	2.0 V	5/	5/	6/	6/ $dB_{CT} = -20 \log (V_{OUT}/V_{IN})$	“ “	“ “	“ “	“ “					2.0 V	K1 K1	12 or 13 10 or 11	60	1.0 1.0	mV_{p-p} mV_{p-p} dB
	V_{ISO}	115 116 117 118	0.8 V 0.8 V	IN 4/	IN 4/	IN 4/	IN 4/ $dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$	15 V “ “ “	-15 V “ “ “	GND “ “ “	5.0 V “ “ “					0.8 V 0.8 V	K1 K1 K1 K1	10 11 12 13	50	3.16 3.16 3.16 3.16	mV_{p-p} “ “ “ dB
9 T_A =+25°C	t_{ON}	119 120 121 122	IN IN	IN	IN	IN	IN	15 V “ “ “	-15 V “ “ “	GND “ “ “	5.0 V “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		250 250 250 250	ns “ “ “
	t_{OFF}	123 124 125 126	IN IN	IN	IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		130 130 130 130	“ “ “ “
10 T_A =+125°C	t_{ON}	127 128 129 130	IN IN	IN	IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		350 “ “ “	“ “ “ “
	t_{OFF}	131 132 133 134	IN IN	IN	IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		200 “ “ “	“ “ “ “
11 T_A =-55°C	t_{ON}	135 136 137 138	IN IN	IN	IN IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		250 “ “ “	“ “ “ “
	t_{OFF}	139 140 141 142	IN IN	IN	IN	IN	IN	“ “ “ “	“ “ “ “	“ “ “ “	“ “ “ “	OUT	OUT	OUT	OUT	IN IN	K6 K8 K9 K7	2 to 10 3 to 11 4 to 12 5 to 13		130 “ “ “	“ “ “ “

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14			Min	Max	
1 T_A =+25°C	R_{DS}	1	0.8 V			-10 mA		15 V	-15 V	GND	5.0 V			-7.5 V			None	4	-7.8		V 2/
	R_{DS}	2	2.0 V		-10 mA			15 V	-15 V	"	"		-7.5 V				"	3	-7.8		V 2/
	$I_{S(OFF)}$	3	0.8 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-1	1	nA
	"	4	2.0 V			10 V		10 V	-20 V	"	"			-10 V			"	4	"	"	"
	"	5	0.8 V		7.5 V			15 V	-15 V	"	"		-7.5 V				"	3	"	"	"
	"	6	2.0 V			7.5 V		15 V	-15 V	"	"			-7.5 V			"	4	"	"	"
	$I_{D(OFF)}$	7	0.8 V		-10 V			10 V	-20 V	"	"		10 V				"	11	"	"	"
	"	8	2.0 V			-10 V		10 V	-20 V	"	"			10 V			"	12	"	"	"
	"	9	0.8 V		-7.5 V			15 V	-15 V	"	"		7.5 V				"	11	"	"	"
	"	10	2.0 V			-7.5 V		15 V	-15 V	"	"			7.5 V			"	12	"	"	"
	$I_{D(ON)+}$	11	0.8 V			-7.5 V		15 V	-15 V	"	"			-7.5 V			K7	4	-2	2	"
	$I_{S(ON)}$	12	2.0 V		-7.5 V			"	"	"	"		-7.5 V				K6	3	-2	2	"
	I_{IL}	13	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IH}	14	5.0 V					"	"	"	"						"	1	-1	10	µA
	$+I_{CC}$	15	GND					"	"	"	"						"	6		0.8	mA
	$+I_{CC}$	16	5.0 V					"	"	"	"						"	6		0.8	"
	$-I_{CC}$	17	GND					"	"	"	"						"	7	-3		"
	$-I_{CC}$	18	5.0 V					"	"	"	"						"	7	-3		"
	I_L	19	GND					"	"	"	"						"	9		3.2	"
	I_L	20	5.0 V					"	"	"	"						"	9		3.2	"
	I_R	21	GND					"	"	"	"						"	8	-2.2		"
	I_R	22	5.0 V					"	"	"	"						"	8	-2.2		"
2 T_A =+125°C	R_{DS}	23	0.8 V			-10 mA		15 V	-15 V	"	"			-7.5 V			"	4	-8.1		V 2/
	R_{DS}	24	2.0 V		-10 mA			15 V	-15 V	"	"		-7.5 V				"	3	-8.1		V 2/
	$I_{S(OFF)}$	25	0.8 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-100	100	nA
	"	26	2.0 V			10 V		10 V	-20 V	"	"			-10 V			"	4	-100	100	nA
	"	27	0.8 V		7.5 V			15 V	-15 V	"	"		-7.5 V				"	3	-100	100	nA
	"	28	2.0 V			7.5 V		15 V	-15 V	"	"			-7.5 V			"	4	-100	100	nA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14			Min	Max	
2 T_A =+125°C	$I_{D(OFF)}$	29	0.8 V		-10 V			10 V	-20 V	GND	5.0 V		10 V				None	11	-100	100	nA
	"	30	2.0 V			-10 V		10 V	-20 V	"	"			10 V			"	12	"	"	"
	"	31	0.8 V		-7.5 V			15 V	-15 V	"	"		7.5 V				"	11	"	"	"
	"	32	2.0 V			-7.5 V		15 V	-15 V	"	"			7.5 V			"	12	"	"	"
	$I_{D(ON)+}$	33	0.8 V			-7.5 V		"	"	"	"			-7.5 V			K7	4	-200	200	"
	$I_{S(ON)}$	34	2.0 V		-7.5 V			"	"	"	"		-7.5 V				K6	3	-200	200	"
	I_{IL}	35	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IH}	36	5.0 V					"	"	"	"						"	1	-2	20	µA
	$+I_{CC}$	37	GND					"	"	"	"						"	6		0.8	mA
	$+I_{CC}$	38	5.0 V					"	"	"	"						"	6		0.8	mA
	$-I_{CC}$	39	GND					"	"	"	"						"	7	-3		mA
	$-I_{CC}$	40	5.0 V					"	"	"	"						"	7	-3		mA
	I_L	41	GND					"	"	"	"						"	9		3.2	mA
	I_L	42	5.0 V					"	"	"	"						"	9		3.2	mA
	I_R	43	GND					"	"	"	"						"	8	-2.2		mA
	I_R	44	5.0 V					"	"	"	"						"	8	-2.2		mA
3 T_A =-55°C	R_{DS}	45	0.8 V			-10 mA		"	"	"	"			-7.5 V			"	4	-7.8		V 2/
	R_{DS}	46	2.0 V		-10 mA			"	"	"	"		-7.5 V				"	3	-7.8		V 2/
	$I_{S(OFF)}$	47	0.8 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-100	100	nA
	"	48	2.0 V			10 V		10 V	-20 V	"	"			-10 V			"	4	"	"	"
	"	49	0.8 V		7.5 V			15 V	-15 V	"	"		-7.5 V				"	3	"	"	"
	"	50	2.0 V			7.5 V		15 V	-15 V	"	"			-7.5 V			"	4	"	"	"
	$I_{D(OFF)}$	51	0.8 V		-10 V			10 V	-20 V	"	"		10 V				"	11	"	"	"
	"	52	2.0 V			-10 V		10 V	-20 V	"	"			10 V			"	12	"	"	"
	"	53	0.8 V		-7.5 V			15 V	-15 V	"	"		7.5 V				"	11	"	"	"
	"	54	2.0 V			-7.5 V		15 V	-15 V	"	"			7.5 V			"	12	"	"	"
	$I_{D(ON)+}$	55	0.8 V			-7.5 V		15 V	-15 V	"	"			-7.5 V			K7	4	-200	200	"
	$I_{S(ON)}$	56	2.0 V		-7.5 V			15 V	-15 V	"	"		-7.5 V				K6	3	-200	200	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14			Min	Max	
3	I_{IL}	57	GND					15 V	-15 V	GND	5.0 V						None	1	-250	-0.1	µA
T_A =-55°C	I_{IH}	58	5.0 V					"	"	"	"						"	1	-1	10	µA
	$+I_{CC}$	59	GND					"	"	"	"						"	6		1.4	mA
	$+I_{CC}$	60	5.0 V					"	"	"	"						"	6		1.4	"
	$-I_{CC}$	61	GND					"	"	"	"						"	7	-4.8		"
	$-I_{CC}$	62	5.0 V					"	"	"	"						"	7	-4.8		"
	I_L	63	GND					"	"	"	"						"	9		5	"
	I_L	64	5.0 V					"	"	"	"						"	9		5	"
	I_R	65	GND					"	"	"	"						"	8	-2		"
	I_R	66	5.0 V					"	"	"	"						"	8	-2		"
4	V_{CTE}	67	IN 3/		GND			"	"	"	"						K2	11		20	mV_{p-p}
T_A = +25°C	V_{CTE}	68	IN 3/			GND		"	"	"	"						K3	12		20	mV_{p-p}
7	V_{CT} 7/	69	2.0 V		IN 4/			15 V	-15 V	GND	5.0 V						K1	12		1.0	mV_{p-p}
T_A =+25°C								$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$			"								60		dB
	V_{ISO}	70	2.0 V			IN 4/		15 V	-15 V	GND	5.0 V						K1	12		3.16	mV_{p-p}
	V_{ISO}	71	0.8 V		IN 4/			15 V	-15 V	GND	5.0 V						K1	11		3.16	mV_{p-p}
								$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$			"								50		dB
9	t_{ON}	72	IN		IN			15 V	-15 V	GND	5.0 V		OUT				K4	11		150	ns
T_A =+25°C	t_{ON}	73	"			IN		"	"	"	"			OUT			K5	12		150	"
	t_{OFF}	74	"		IN			"	"	"	"		OUT				K4	11		130	"
	t_{OFF}	75	"			IN		"	"	"	"			OUT			K5	12		130	"
10	t_{ON}	76	"		IN			"	"	"	"		OUT				K4	11		300	"
T_A =+125°C	t_{ON}	77	"			IN		"	"	"	"			OUT			K5	12		300	"
	t_{OFF}	78	"		IN			"	"	"	"		OUT				K4	11		200	"
	t_{OFF}	79	"			IN		"	"	"	"			OUT			K5	12		200	"
11	t_{ON}	80	"		IN			"	"	"	"		OUT				K4	11		150	"
T_A =-55°C	t_{ON}	81	"			IN		"	"	"	"			OUT			K5	12		150	"
	t_{OFF}	82	"		IN			"	"	"	"		OUT				K4	11		130	"
	t_{OFF}	83	"			IN		"	"	"	"			OUT			K5	12		130	"
12	t_{D1}	84	"		IN	IN		"	"	"	"						K4, K8	11	5		"
T_A =25°C	t_{D2}	85	"		IN	IN		"	"	"	"						K4, K8	12	5		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14			Min	Max	
1 T_A = 25°C	R_{DS}	1	0.8 V			-10 mA		15 V	-15 V	GND	5.0 V			-10 V			None	4	-10.75		V 2/
	R_{DS}	2	2.0 V		-10 mA			15 V	-15 V	"	"		-10 V				"	3	-10.75		V 2/
	$I_{S(OFF)}$	3	0.8 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-1	1	nA
	"	4	2.0 V			10 V		10 V	-20 V	"	"			-10 V			"	4	"	"	"
	"	5	0.8 V		10 V			15 V	-15 V	"	"		-10 V				"	3	"	"	"
	"	6	2.0 V			10 V		15 V	-15 V	"	"			-10 V			"	4	"	"	"
	$I_{D(OFF)}$	7	0.8 V		-10 V			10 V	-20 V	"	"		10 V				"	11	"	"	"
	"	8	2.0 V			-10 V		10 V	-20 V	"	"			10 V			"	12	"	"	"
	"	9	0.8 V		-10 V			15 V	-15 V	"	"		10 V				"	11	"	"	"
	"	10	2.0 V			-10 V		15 V	-15 V	"	"			10 V			"	12	"	"	"
	$I_{D(ON)+}$	11	0.8 V			-10 V		15 V	-15 V	"	"			-10 V			K7	4	-2	2	"
	$I_{S(ON)}$	12	2.0 V		-10 V			"	"	"	"		-10 V				K6	3	-2	2	"
	I_{IL}	13	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IH}	14	5.0 V					"	"	"	"						"	1	-1	10	µA
	$+I_{CC}$	15	GND					"	"	"	"						"	6		0.8	mA
	$+I_{CC}$	16	5.0 V					"	"	"	"						"	6		0.8	"
	$-I_{CC}$	17	GND					"	"	"	"						"	7	-3		"
	$-I_{CC}$	18	5.0 V					"	"	"	"						"	7	-3		"
	I_L	19	GND					"	"	"	"						"	9		3.2	"
	I_L	20	5.0 V					"	"	"	"						"	9		3.2	"
	I_R	21	GND					"	"	"	"						"	8	-2.2		"
	I_R	22	5.0 V					"	"	"	"						"	8	-2.2		"
2 T_A =125°C	R_{DS}	23	0.8 V			-10 mA		15 V	-15 V	"	"			-10 V			"	4	-11.50		V 2/
	R_{DS}	24	2.0 V		-10 mA			15 V	-15 V	"	"		-10 V				"	3	-11.50		V 2/
	$I_{S(OFF)}$	25	0.8 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-100	100	nA
	$I_{S(OFF)}$	26	2.0 V			10 V		10 V	-20 V	"	"			-10 V			"	4	-100	100	nA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14			Min	Max	
2 T_A =+125°C	$I_{S(OFF)}$	27	0.8 V		10 V			15 V	-15 V	GND	5.0 V		-10 V				None	3	-100	100	nA
	$I_{S(OFF)}$	28	2.0 V			10 V		15 V	-15 V	"	"			-10 V			"	4	"	"	"
	$I_{D(OFF)}$	29	0.8 V		-10 V			10 V	-20 V	"	"		10 V				"	11	"	"	"
	"	30	2.0 V			-10 V		10 V	-20 V	"	"			10 V			"	12	"	"	"
	"	31	0.8 V		-10 V			15 V	-15 V	"	"		10 V				"	11	"	"	"
	"	32	2.0 V			-10 V		15 V	-15 V	"	"			10 V			"	12	"	"	"
	$I_{D(ON)+}$	33	0.8 V			-10 V		"	"	"	"			-10 V			K7	4	-200	200	"
	$I_{S(ON)}$	34	2.0 V		-10 V			"	"	"	"		-10 V				K6	3	-200	200	"
	I_{IL}	35	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IH}	36	5.0 V					"	"	"	"						"	1	-2	20	µA
	$+I_{CC}$	37	GND					"	"	"	"						"	6		0.8	mA
	$+I_{CC}$	38	5.0 V					"	"	"	"						"	6		0.8	"
	$-I_{CC}$	39	GND					"	"	"	"						"	7	-3		"
	$-I_{CC}$	40	5.0 V					"	"	"	"						"	7	-3		"
	I_L	41	GND					"	"	"	"						"	9		3.2	"
	I_L	42	5.0 V					"	"	"	"						"	9		3.2	"
	I_R	43	GND					"	"	"	"						"	8	-2.2		"
	I_R	44	5.0 V					"	"	"	"						"	8	-2.2		"
3 T_A =-55°C	R_{DS}	45	0.8 V			-10 mA		"	"	"	"						"	4	-10.75		V 2/
	R_{DS}	46	2.0 V		-10 mA			"	"	"	"						"	3	-10.75		V 2/
	$I_{S(OFF)}$	47	0.8 V		10 V			10 V	-20 V	"	"		-10 V				"	3	-100	100	nA
	"	48	2.0 V			10 V		10 V	-20 V	"	"			-10 V			"	4	"	"	"
	"	49	0.8 V		10 V			15 V	-15 V	"	"		-10 V				"	3	"	"	"
	"	50	2.0 V			10 V		15 V	-15 V	"	"			-10 V			"	4	"	"	"
	$I_{D(OFF)}$	51	0.8 V		-10 V			10 V	-20 V	"	"		10 V				"	11	"	"	"
	"	52	2.0 V			-10 V		10 V	-20 V	"	"			10 V			"	12	"	"	"
	"	53	0.8 V		-10 V			15 V	-15 V	"	"		10 V				"	11	"	"	"
	"	54	2.0 V			-10 V		15 V	-15 V	"	"			10 V			"	12	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 – Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN	2	3 S_1	4 S_2	5	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10	11 D_1	12 D_2	13	14			Min	Max	
3 T_A =-55°C	$I_{D(ON)+}$ $I_{S(ON)}$	55 56	0.8 V 2.0 V		 -10 V	-10 V		15 V “	-15 V “	GND “	5.0 V “		 -10 V	-10 V			K7 K6	4 3	-200 -200	200 200	nA nA
	I_{IL} I_{IH}	57 58	GND 5.0 V					“ “	“ “	“ “	“ “						None “	1 1	-250 -1	-0.1 10	µA µA
	$+I_{CC}$ $+I_{CC}$	59 60	GND 5.0 V					“ “	“ “	“ “	“ “						“ “	6 6		1.4 1.4	mA “
	$-I_{CC}$ $-I_{CC}$	61 62	GND 5.0 V					“ “	“ “	“ “	“ “						“ “	7 7	-4.8 -4.8		“ “
	I_L I_L	63 64	GND 5.0 V					“ “	“ “	“ “	“ “						“ “	9 9		5 5	“ “
	I_R I_R	65 66	GND 5.0 V					“ “	“ “	“ “	“ “						“ “	8 8	-2 -2		“ “
4 T_A = +25°C	V_{CTE} V_{CTE}	67 68	IN 3/ IN 3/		GND	GND		“ “	“ “	“ “	“ “						K2 K3	11 12		20 20	mV_{p-p} mV_{p-p}
7 T_A =+25°C	V_{CT} 7/	69	2.0 V		IN 4/	$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$		“	“	“	“						K1	12	60	1.0	mV_{p-p} dB
	V_{ISO} V_{ISO}	70 71	2.0 V 0.8 V		 IN 4/	IN 4/	$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$	15 V 15 V	-15 V -15 V	GND GND	5.0 V 5.0 V “						K1 K1	12 11	 50	3.16 3.16	mV_{p-p} mV_{p-p} dB
9 T_A =+25°C	t_{ON} t_{ON}	72 73	IN “		IN	 IN		15 V “	-15 V “	GND “	5.0 V “		OUT	 OUT			K4 K5	11 12		250 250	ns “
	t_{OFF} t_{OFF}	74 75	“ “		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT			K4 K5	11 12		130 130	“ “
10 T_A =+125°C	t_{ON} t_{ON}	76 77	“ “		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT			K4 K5	11 12		350 350	“ “
	t_{OFF} t_{OFF}	78 79	“ “		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT			K4 K5	11 12		200 200	“ “
11 T_A =-55°C	t_{ON} t_{ON}	80 81	“ “		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT			K4 K5	11 12		250 250	“ “
	t_{OFF} t_{OFF}	82 83	“ “		IN	 IN		“ “	“ “	“ “	“ “		OUT	 OUT			K4 K5	11 12		130 130	“ “
12 T_A =25°C	t_{D1} t_{D2}	84 85	“ “		IN IN	IN IN		“ “	“ “	“ “	“ “						K4, K8 K4, K8	11 12	5 5		“ “

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
1 T_A = 25°C	R_{DS}	1	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-7.5 V					None	2	-7.8		V 2/
	"	2	0.8 V		-10 mA			"	"	"	"		-7.5 V				"	3	-7.8		V 2/
	"	3				-10 mA		"	"	"	"			-7.5 V		2.0 V	"	4	-7.8		V 2/
	"	4					-10 mA	"	"	"	"				-7.5 V	0.8 V	"	5	-7.8		V 2/
	$I_{S(OFF)}$	5	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-1	1	nA
	"	6	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	7				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
	"	8					10 V	"	"	"	"				-10 V	2.0 V	"	5	"	"	"
	"	9	0.8 V	7.5 V				15 V	-15 V	"	"	-7.5 V					"	2	"	"	"
	"	10	2.0 V		7.5 V			"	"	"	"		-7.5 V				"	3	"	"	"
	"	11				7.5 V		"	"	"	"			-7.5 V		0.8 V	"	4	"	"	"
	"	12					7.5 V	"	"	"	"				-7.5 V	2.0 V	"	5	"	"	"
	$I_{D(OFF)}$	13	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
	"	14	2.0 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
	"	15				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
	"	16					-10 V	"	"	"	"				10 V	2.0 V	"	13	"	"	"
	"	17	0.8 V	-7.5 V				15 V	-15 V	"	"	7.5 V					"	10	"	"	"
	"	18	2.0 V		-7.5 V			"	"	"	"		7.5 V				"	11	"	"	"
	"	19				-7.5 V		"	"	"	"			7.5 V		0.8 V	"	12	"	"	"
	"	20					-7.5 V	"	"	"	"				7.5 V	2.0 V	"	13	"	"	"
	$I_{D(ON)+}$	21	2.0 V	-7.5 V				"	"	"	"	-7.5 V					K10	2	-2	2	"
	$I_{S(ON)}$	22	0.8 V		-7.5 V			"	"	"	"		-7.5 V				K11	3	-2	2	"
	"	23				-7.5 V		"	"	"	"			-7.5 V		2.0 V	K12	4	-2	2	"
	"	24					-7.5 V	"	"	"	"				-7.5 V	0.8 V	K13	5	-2	2	"
	I_{IL}	25	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	26						"	"	"	"					GND	"	14	-250	-0.1	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
1	I_{IH}	27	5.0 V					15 V	-15 V	GND	5.0 V						None	1	-1	10	µA
T_A =+25°C	I_{IH}	28						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	29	GND					"	"	"	"					GND	"	6		1.5	mA
	$+I_{CC}$	30	5.0 V					"	"	"	"					5.0 V	"	6		1.5	"
	$-I_{CC}$	31	GND					"	"	"	"					GND	"	7	-5		"
	$-I_{CC}$	32	5.0 V					"	"	"	"					5.0 V	"	7	-5		"
	I_L	33	GND					"	"	"	"					GND	"	9		4.5	"
	I_L	34	5.0 V					"	"	"	"					5.0 V	"	9		4.5	"
	I_R	35	GND					"	"	"	"					GND	"	8	-2.2		"
	I_R	36	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		"
2	R_{DS}	37	2.0 V	-10 mA				"	"	"	"	-7.5 V					"	2	-8.1		V 2/
T_A = 125°C	"	38	0.8 V		-10 mA			"	"	"	"		-7.5 V				"	3	-8.1		V 2/
	"	39				-10 mA		"	"	"	"			-7.5 V		2.0 V	"	4	-8.1		V 2/
	"	40					-10 mA	"	"	"	"				-7.5 V	0.8 V	"	5	-8.1		V 2/
	$I_{S(OFF)}$	41	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-100	100	nA
	"	42	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	43				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
	"	44					10 V	"	"	"	"				-10 V	2.0 V	"	5	"	"	"
	"	45	0.8 V	7.5 V				15 V	-15 V	"	"	-7.5 V					"	2	"	"	"
	"	46	2.0 V		7.5 V			"	"	"	"		-7.5 V				"	3	"	"	"
	"	47				7.5 V		"	"	"	"			-7.5 V		0.8 V	"	4	"	"	"
	"	48					7.5 V	"	"	"	"				-7.5 V	2.0 V	"	5	"	"	"
	$I_{D(OFF)}$	49	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
	"	50	2.0 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
	"	51				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
	"	52					-10 V	"	"	"	"				10 V	2.0 V	"	13	"	"	"
	"	53	0.8 V	-7.5 V				15 V	-15 V	"	"	7.5 V					"	10	"	"	"
	"	54	2.0 V		-7.5 V			"	"	"	"		7.5 V				"	11	"	"	"
	"	55				-7.5 V		"	"	"	"			7.5 V		0.8 V	"	12	"	"	"
	"	56					-7.5 V	"	"	"	"				7.5 V	2.0 V	"	13	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
2	$I_{D(ON)+}$	57	2.0 V	-7.5 V				15 V	-15 V	GND	5.0 V	-7.5 V					K10	2	-200	200	nA
T_A = 125°C	$I_{S(ON)}$	58	0.8 V		-7.5 V			"	"	"	"		-7.5 V				K11	3	"	"	"
	"	59				-7.5 V		"	"	"	"			-7.5 V		2.0 V	K12	4	"	"	"
	"	60					-7.5 V	"	"	"	"				-7.5 V	0.8 V	K13	5	"	"	"
	I_{IL}	61	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	62						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	63	5.0 V					"	"	"	"						"	1	-2	20	µA
	I_{IH}	64						"	"	"	"					5.0 V	"	14	-2	20	µA
	$+I_{CC}$	65	GND					"	"	"	"					GND	"	6		1.5	mA
	$+I_{CC}$	66	5.0 V					"	"	"	"					5.0 V	"	6		1.5	"
	$-I_{CC}$	67	GND					"	"	"	"					GND	"	7	-5		"
	$-I_{CC}$	68	5.0 V					"	"	"	"					5.0 V	"	7	-5		"
	I_L	69	GND					"	"	"	"					GND	"	9		4.5	"
	I_L	70	5.0 V					"	"	"	"					5.0 V	"	9		4.5	"
	I_R	71	GND					"	"	"	"					GND	"	8	-2.2		"
	I_R	72	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		"
3	R_{DS}	73	2.0 V	-10 mA				"	"	"	"	-7.5 V					"	2	-7.8		V 2/
T_A = -55°C	"	74	0.8 V		-10 mA			"	"	"	"		-7.5 V				"	3	"		V 2/
	"	75				-10 mA		"	"	"	"			-7.5 V		2.0 V	"	4	"		V 2/
	"	76					-10 mA	"	"	"	"				-7.5 V	0.8 V	"	5	"		V 2/
	$I_{S(OFF)}$	77	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-100	100	nA
	"	78	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	79				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
	"	80					10 V	"	"	"	"				-10 V	2.0 V	"	5	"	"	"
	"	81	0.8 V	7.5 V				15 V	-15 V	"	"	-7.5 V					"	2	"	"	"
	"	82	2.0 V		7.5 V			"	"	"	"		-7.5 V				"	3	"	"	"
	"	83				7.5 V		"	"	"	"			-7.5 V		0.8 V	"	4	"	"	"
	"	84					7.5 V	"	"	"	"				-7.5 V	2.0 V	"	5	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
3	$I_{D(OFF)}$	85	0.8 V	-10 V				10 V	-20 V	GND	5.0 V	10 V					None	10	-100	100	nA
T_A = -55°C	"	86	2.0 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
	"	87				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
	"	88					-10 V	"	"	"	"				10 V	2.0 V	"	13	"	"	"
	"	89	0.8 V	-7.5 V				15 V	-15 V	"	"	7.5 V					"	10	"	"	"
	"	90	2.0 V		-7.5 V			"	"	"	"		7.5 V				"	11	"	"	"
	"	91				-7.5 V		"	"	"	"			7.5 V		0.8 V	"	12	"	"	"
	"	92					-7.5 V	"	"	"	"				7.5 V	2.0 V	"	13	"	"	"
	$I_{D(ON)+}$	93	2.0 V	-7.5 V				15 V	-15 V	GND	5.0 V	-7.5 V					K10	2	-200	200	"
	$I_{S(ON)}$	94	0.8 V		-7.5 V			"	"	"	"		-7.5 V				K11	3	"	"	"
	"	95				-7.5 V		"	"	"	"			-7.5 V		2.0 V	K12	4	"	"	"
	"	96					-7.5 V	"	"	"	"				-7.5 V	0.8 V	K13	5	"	"	"
	I_{IL}	97	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	98						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	99	5.0 V					"	"	"	"						"	1	-1	10	µA
	I_{IH}	100						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	101	GND					"	"	"	"					GND	"	6		2.5	mA
	$+I_{CC}$	102	5.0 V					"	"	"	"					5.0 V	"	6		2.5	"
	$-I_{CC}$	103	GND					"	"	"	"					GND	"	7	-8		"
	$-I_{CC}$	104	5.0 V					"	"	"	"					5.0 V	"	7	-8		"
	I_L	105	GND					"	"	"	"					GND	"	9		7	"
	I_L	106	5.0 V					"	"	"	"					5.0 V	"	9		7	"
	I_R	107	GND					"	"	"	"					GND	"	8	-2		"
	I_R	108	5.0 V					"	"	"	"					5.0 V	"	8	-2		"
4	V_{CTE}	109	IN 3/	GND				"	"	"	"						K2	10		20	mV_{p-p}
T_A = +25°C	"	110	IN 3/		GND			"	"	"	"						K4	11		20	"
	"	111				GND		"	"	"	"					IN 3/	K5	12		20	"
	"	112					GND	"	"	"	"					IN 3/	K3	13		20	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
7 T_A =+25°C	V_{CT} 7/	113	2.0 V	IN 4/				15 V	-15 V	GND	5.0 V						K1	11		1.0	mV_{p-p}
		114	0.8 V		IN 4/			"	"	"	"						K1	10		"	"
		115				IN 4/		"	"	"	"					2.0 V	K1	13		"	"
		116					IN 4/	"	"	"	"					0.8 V	K1	12		"	"
								$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$											60		dB
	V_{ISO}	117	0.8 V	IN 4/				15 V	-15 V	GND	5.0 V						K1	10		3.16	mV_{p-p}
		118	2.0 V		IN 4/			"	"	"	"						K1	11		3.16	"
		119				IN 4/		"	"	"	"					0.8 V	K1	12		3.16	"
		120					IN 4/	"	"	"	"					2.0 V	K1	13		3.16	"
								$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$			"								50		dB
9 T_A =+25°C	t_{ON}	121	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		150	ns
		122	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		123				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		124					IN	"	"	"	"				OUT	IN	K7	5 to 13		"	"
	t_{OFF}	125	IN	IN				"	"	"	"	OUT					K6	2 to 10		130	"
		126	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		127				IN		"	"	"	"			OUT			K9	4 to 12		"	"
		128					IN	"	"	"	"				OUT		K7	5 to 13		"	"
10 T_A =+125°C	t_{ON}	129	IN	IN				"	"	"	"	OUT					K6	2 to 10		300	"
		130	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		131				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		132					IN	"	"	"	"				OUT	IN	K7	5 to 13		"	"
	t_{OFF}	133	IN	IN				"	"	"	"	OUT					K6	2 to 10		200	"
		134	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		135				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		136					IN	"	"	"	"				OUT	IN	K7	5 to 13		"	"
11 T_A =-55°C	t_{ON}	137	IN	IN	IN			"	"	"	"	OUT					K6	2 to 10		150	"
		138	IN					"	"	"	"		OUT				K8	3 to 11		"	"
		139				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		140					IN	"	"	"	"				OUT	IN	K7	5 to 13		"	"
	t_{OFF}	141	IN	IN				"	"	"	"	OUT					K6	2 to 10		130	"
		142	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		143				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		144					IN	"	"	"	"				OUT	IN	K7	5 to 13		"	"
12 T_A =25°C	t_{D1}	145	IN	IN	IN			"	"	"	"						K6, K14	11	5		"
	t_{D2}	146	IN	IN	IN			"	"	"	"						K6, K14	11	5		"
	t_{D1}	147				IN	IN	"	"	"	"					IN	K7, K15	12	5		"
	t_{D2}	148				IN	IN	"	"	"	"					IN	K7 , K15	12	5		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
1	R_{DS}	1	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-10 V					None	2	-10.75		V 2/
T_A = 25°C	"	2	0.8 V		-10 mA			"	"	"	"		-10 V				"	3	"		V 2/
	"	3				-10 mA		"	"	"	"			-10 V		2.0 V	"	4	"		V 2/
	"	4					-10 mA	"	"	"	"				-10 V	0.8 V	"	5	"		V 2/
	$I_{S(OFF)}$	5	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-1	1	nA
	"	6	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	7				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
	"	8					10 V	"	"	"	"				-10 V	2.0 V	"	5	"	"	"
	"	9	0.8 V	10 V				15 V	-15 V	"	"	-10 V					"	2	"	"	"
	"	10	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	11				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
	"	12					10 V	"	"		"				-10 V	2.0 V	"	5	"	"	"
	$I_{D(OFF)}$	13	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
	"	14	2.0 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
	"	15				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
	"	16					-10 V	"	"	"	"				10 V	2.0 V	"	13	"	"	"
	"	17	0.8 V	-10 V				15 V	-15 V	"	"	10 V					"	10	"	"	"
	"	18	2.0 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
	"	19				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
	"	20					-10 V	"	"	"	"				10 V	2.0 V	"	13	"	"	"
	$I_{D(ON)+}$	21	2.0 V	-10 V				"	"	"	"	-10 V					K10	2	-2	2	"
	$I_{S(ON)}$	22	0.8 V		-10 V			"	"	"	"		-10 V				K11	3	"	"	"
	"	23				-10 V		"	"	"	"			-10 V		2.0 V	K12	4	"	"	"
	"	24					-10 V	"	"	"	"				-10 V	0.8 V	K13	5	"	"	"
	I_{IL}	25	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	26						"	"	"	"					GND	"	14	-250	-0.1	µA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
1	I_{IH}	27	5.0 V					15 V	-15 V	GND	5.0 V						None	1	-1	10	µA
T_A = 25°C	I_{IH}	28						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	29	GND					"	"	"	"					GND	"	6		1.5	mA
	$+I_{CC}$	30	5.0 V					"	"	"	"					5.0 V	"	6		1.5	"
	$-I_{CC}$	31	GND					"	"	"	"					GND	"	7	-5		"
	$-I_{CC}$	32	5.0 V					"	"	"	"					5.0 V	"	7	-5		"
	I_L	33	GND					"	"	"	"					GND	"	9		4.5	"
	I_L	34	5.0 V					"	"	"	"					5.0 V	"	9		4.5	"
	I_R	35	GND					"	"	"	"					GND	"	8	-2.2		"
	I_R	36	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		"
2	R_{DS}	37	2.0 V	-10 mA				15 V	-15 V	GND	5.0 V	-10 V					"	2	-11.50		V 2/
T_A =125°C	"	38	0.8 V		-10 mA			"	"	"	"		-10 V				"	3	"		"
	"	39				-10 mA		"	"	"	"			-10 V		2.0 V	"	4	"		"
	"	40					-10 mA	"	"	"	"				-10 V	0.8 V	"	5	"		"
	$I_{S(OFF)}$	41	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-100	100	nA
	"	42	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	43				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
	"	44					10 V	"	"	"	"				-10 V	2.0 V	"	5	"	"	"
	"	45	0.8 V	10 V				15 V	-15 V	"	"	-10 V					"	2	"	"	"
	"	46	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	47				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
	"	48					10 V	"	"		"				-10 V	2.0 V	"	5	"	"	"
	$I_{D(OFF)}$	49	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
	"	50	2.0 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
	"	51				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
	"	52					-10 V	"	"	"	"				10 V	2.0 V	"	13	"	"	"
	"	53	0.8 V	-10 V				15 V	-15 V	"	"	10 V					"	10	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
2	$I_{D(OFF)}$	54	2.0 V		-10 V			15 V	-15 V	GND	5.0 V		10 V				"	11	-100	100	nA
T_A =125°C	$I_{D(OFF)}$	55				-10 V		"	"	"	"			10 V		0.8 V	"	12	-100	100	"
	$I_{D(OFF)}$	56					-10 V	"	"	"	"				10 V	2.0 V	"	13	-100	100	"
	$I_{D(ON)+}$	57	2.0 V	-10 V				"	"	"	"	-10 V					K10	2	-200	200	"
	$I_{S(ON)}$	58	0.8 V		-10 V			"	"	"	"		-10 V				K11	3	-200	200	"
	"	59				-10 V		"	"	"	"			-10 V		2.0 V	K12	4	-200	200	"
	"	60					-10 V	"	"	"	"				-10 V	0.8 V	K13	5	-200	200	"
	I_{IL}	61	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	62						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	63	5.0 V					"	"	"	"						"	1	-2	20	µA
	I_{IH}	64						"	"	"	"					5.0 V	"	14	-2	20	µA
	$+I_{CC}$	65	GND					"	"	"	"					GND	"	6		1.5	mA
	$+I_{CC}$	66	5.0 V					"	"	"	"					5.0 V	"	6		1.5	"
	$-I_{CC}$	67	GND					"	"	"	"					GND	"	7	-5		"
	$-I_{CC}$	68	5.0 V					"	"	"	"					5.0 V	"	7	-5		"
	I_L	69	GND					"	"	"	"					GND	"	9		4.5	"
	I_L	70	5.0 V					"	"	"	"					5.0 V	"	9		4.5	"
	I_R	71	GND					"	"	"	"					GND	"	8	-2.2		"
	I_R	72	5.0 V					"	"	"	"					5.0 V	"	8	-2.2		"
3	R_{DS}	73	2.0 V	-10 mA				"	"	"	"	-10 V					"	2	-10.75		V 2/
T_A =-55°C	"	74	0.8 V		-10 mA			"	"	"	"		-10 V				"	3	"		"
	"	75				-10 mA		"	"	"	"			-10 V		2.0 V	"	4	"		"
	"	76					-10 mA	"	"	"	"				-10 V	0.8 V	"	5	"		"
	$I_{S(OFF)}$	77	0.8 V	10 V				10 V	-20 V	"	"	-10 V					"	2	-100	100	nA
	"	78	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	79				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
3	$I_{S(OFF)}$	80					10 V	10 V	-20 V	GND	5.0 V				-10 V	2.0 V	None	5	-100	100	nA
T_A =-55°C	"	81	0.8 V	10 V				15 V	-15 V	"	"	-10 V					"	2	"	"	"
	"	82	2.0 V		10 V			"	"	"	"		-10 V				"	3	"	"	"
	"	83				10 V		"	"	"	"			-10 V		0.8 V	"	4	"	"	"
	"	84					10 V	"	"		"				-10 V	2.0 V	"	5	"	"	"
	$I_{D(OFF)}$	85	0.8 V	-10 V				10 V	-20 V	"	"	10 V					"	10	"	"	"
	"	86	2.0 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
	"	87				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
	"	88					-10 V	"	"	"	"				10 V	2.0 V	"	13	"	"	"
	"	89	0.8 V	-10 V				15 V	-15 V	"	"	10 V					"	10	"	"	"
	"	90	2.0 V		-10 V			"	"	"	"		10 V				"	11	"	"	"
	"	91				-10 V		"	"	"	"			10 V		0.8 V	"	12	"	"	"
	"	92					-10 V	"	"	"	"				10 V	2.0 V	"	13	"	"	"
	$I_{D(ON)+}$	93	2.0 V	-10 V				"	"	"	"	-10 V					K10	2	-200	200	"
	$I_{S(ON)}$	94	0.8 V		-10 V			"	"	"	"		-10 V				K11	3	"	"	"
	"	95				-10 V		"	"	"	"			-10 V		2.0 V	K12	4	"	"	"
	"	96					-10 V	"	"	"	"				-10 V	0.8 V	K13	5	"	"	"
	I_{IL}	97	GND					"	"	"	"						None	1	-250	-0.1	µA
	I_{IL}	98						"	"	"	"					GND	"	14	-250	-0.1	µA
	I_{IH}	99	5.0 V					"	"	"	"						"	1	-1	10	µA
	I_{IH}	100						"	"	"	"					5.0 V	"	14	-1	10	µA
	$+I_{CC}$	101	GND					"	"	"	"					GND	"	6		2.5	mA
	$+I_{CC}$	102	5.0 V					"	"	"	"					5.0 V	"	6		2.5	"
	$-I_{CC}$	103	GND					"	"	"	"					GND	"	7	-8		"
	$-I_{CC}$	104	5.0 V					"	"	"	"					5.0 V	"	7	-8		"
	I_L	105	GND					"	"	"	"					GND	"	9		7	"
	I_L	106	5.0 V					"	"	"	"					5.0 V	"	9		7	"
	I_R	107	GND					"	"	"	"					GND	"	8	-2		"
	I_R	108	5.0 V					"	"	"	"					5.0 V	"	8	-2		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
4	V_{CTE}	109	IN 3/	GND				15 V	-15 V	GND	5.0 V						K2	10		20	mV_{p-p}
T_A =+25°C	"	110	IN 3/		GND			"	"	"	"						K4	11		20	"
	"	111				GND		"	"	"	"					IN 3/	K5	12		20	"
	"	112					GND	"	"	"	"					IN 3/	K3	13		20	"
7	V_{CT} 7/	113	2.0 V	IN 4/				"	"	"	"						K1	11		1.0	"
T_A =+25°C		114	0.8 V		IN 4/			"	"	"	"						K1	10		"	"
		115				IN 4/		"	"	"	"					2.0 V	K1	13		"	"
		116					IN 4/	"	"	"	"					0.8 V	K1	12		"	"
			$dB_{CT} = -20 \log (V_{OUT}/V_{IN})$																60		dB
	V_{ISO}	117	0.8 V	IN 4/				15 V	-15 V	GND	5.0 V						K1	10	0	3.16	mV_{p-p}
		118	2.0 V		IN 4/			"	"	"	"						K1	11	0	3.16	"
		119				IN 4/		"	"	"	"					0.8 V	K1	12	0	3.16	"
		120					IN 4/	"	"	"	"					2.0 V	K1	13	0	3.16	"
			$dB_{ISO} = -20 \log (V_{OUT}/V_{IN})$								"								50		dB
9	t_{ON}	121	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		250	ns
T_A =+25°C		122	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		123				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		124					IN	"	"	"	"				OUT	IN	K7	5 to 13		"	"
	t_{OFF}	125	IN	IN				"	"	"	"	OUT					K6	2 to 10		130	"
		126	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		127				IN		"	"	"	"			OUT			K9	4 to 12		"	"
		128					IN	"	"	"	"				OUT		K7	5 to 13		"	"
10	t_{ON}	129	IN	IN				"	"	"	"	OUT					K6	2 to 10		350	"
T_A =+125°C		130	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		131				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		132					IN	"	"	"	"				OUT	IN	K7	5 to 13		"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 –Continued.

Subgroup	Symbol	Test no.	Adapter pin number 1/														Relays energized	Measured pin no.	Limits		Unit
			1 IN_1	2 S_1	3 S_3	4 S_2	5 S_4	6 $+V_{CC}$	7 $-V_{CC}$	8 V_R	9 V_L	10 D_1	11 D_3	12 D_2	13 D_4	14 IN_2			Min	Max	
10	t_{OFF}	133	IN	IN				15 V	-15 V	GND	5.0 V	OUT					K6	2 to 10		200	ns
T_A =+125°C		134	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		135				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		136					IN	"	"	"	"				OUT	IN	K7	5 to 13			"	"
11	t_{ON}	137	IN	IN				"	"	"	"	OUT					K6	2 to 10		250	"
T_A =-55°C		138	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		139				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		140					IN	"	"	"	"				OUT	IN	K7	5 to 13			"	"
	t_{OFF}	141	IN	IN				"	"	"	"	OUT					K6	2 to 10		130	"
		142	IN		IN			"	"	"	"		OUT				K8	3 to 11		"	"
		143				IN		"	"	"	"			OUT		IN	K9	4 to 12		"	"
		144					IN	"	"	"	"				OUT	IN	K7	5 to 13			"	"
12	t_{D1}	145	IN	IN	IN			"	"	"	"						K6, K14	11	5		"
T_A =25°C	t_{D2}	146	IN	IN	IN			"	"	"	"						K6, K14	11	5		"
	t_{D1}	147				IN	IN	"	"	"	"					IN	K7, K15	12	5		"
	t_{D2}	148				IN	IN	"	"	"	"					IN	K7 , K15	12	5		"

NOTES:

1/ The test circuits used with table III are shown in figures 2, 3, and 4. The waveforms on figure 5 apply to all device types as specified within table III (see tests for t_{ON} and t_{OFF}). The waveforms in figure 6 apply to device types 05, 06, 07, and 08 as specified within table III.

2/ R_{DS} (in Ω) = -100 (measured value +7.5) for device types 01, 03, 05, and 07. R_{DS} (in Ω) = -100 (measured value +10) for device types 02, 04, 06, and 08. R_{DS} may be measured differentially with respect to V_A. In case of differentially measured voltages, the table III limits representing voltage drop across the tested switch must be maintained.

3/ The input pulse generator shall have the following characteristics: (a) V_{gen} = 3.0 V (b) Rise time ≤ 10 ns (c) Fall time ≤ 10 ns and (d) PRR = 100 kHz at 50% duty cycle.

4/ The input generator shall have the following characteristics: V_{gen} = 1 V_{P-P} at 10 MHz. V_{CT} is measured on monolithic devices only.

5/ Input (IN 3/) shall be applied to either S_1 or S_3.

6/ Input (IN 3/) shall be applied to either S_2 or S_4.

7/ V_{CT} applies only to monolithic devices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table V of MIL-PRF-38535. End point electrical parameters shall be as specified in table II herein. A special subgroup shall be added to group D inspection for class S devices only, and it shall consist of the group A subgroups 4 and 7 as specified in table III herein. This special subgroup shall be performed on each device type that is qualified from those listed in 1.2.1 herein. After initial qualification, the special subgroup shall be performed periodically on a single device type selected from those device types previously qualified. When more than one device type is qualified, the single device type selected shall be different device type for each subsequent periodic inspection until all qualified device types have been inspected. The sequence of single device types shall be repeated to fulfill the periodic inspection requirement.

4.5 Methods of inspection. Methods of inspection shall be specified and as follows.

4.5.1 Voltage and current. All voltage values given, except differential voltages, are referenced to the external zero reference level of the supply voltage. Currents given are conventional current and positive when flowing into the referenced terminal.

4.5.2 Life test cooldown procedure. When devices are measured at 25°C following application of the operating life or burn-in test condition, they shall be cooled to room temperature prior to removal of the bias.

Table IV. Groups C end point electrical parameters (T_A = 25°C, $\pm V_{CC}$ = ±15 V).

Test	Device types					
	01, 03, 05, 07			02, 04, 06, 08		
	Limits		Delta	Limits		Delta
	Min	Max		Min	Max	
R_{DS}	-7.8 V	----	±30 mV	-10.75 V	----	75 mV
$I_{S(OFF)}$	-1 nA	1 nA	±0.5 nA	-1 nA	1 nA	±0.5 nA
$I_{D(OFF)}$	-1 nA	1 nA	±0.5 nA	-1 nA	1 nA	±0.5 nA

5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.

b. Complete part number (see 1.2).

c. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

d. Requirements for certificate of compliance, if applicable.

e. Requirements for notification of change of product or process to acquiring activity in addition to notification of the qualifying activity, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

f. Requirements for failure analysis (including required test condition of MIL-STD-883, method 5003), corrective action and reporting of results, if applicable.

g. Requirements for product assurance options.

h. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements should not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.

i. Requirements for “JAN” marking.

j. Packaging requirements (see 5.1).

6.3 Superseding information. The requirements of MIL-M-38510 have been superseded to take advantage of the available Qualified Manufacturer Listing (QML) system provided by MIL-PRF-38535. Previous references to MIL-M-38510 in this document have been replaced by appropriate references to MIL-PRF-38535. All technical requirements now consist of this specification and MIL-PRF-38535. The MIL-M-38510 specification sheet number and PIN have been retained to avoid adversely impacting existing government logistics systems and contractor's parts lists.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-38535 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DSCC-VQ, 3990 E. Broad Street, Columbus, Ohio 43123-1199.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535, MIL-HDBK-1331, and as follows:.

$+V_{CC}$	Positive supply voltage
$-V_{CC}$	Negative supply voltage
$+I_{CC}$	Positive supply current
$-I_{CC}$	Negative supply current
V_L	Logic supply voltage
I_L	Logic supply current
R_{DS}	Resistance of an “ON” switch
V_D	Drain voltage
V_S	Source voltage
I_D	Drain current
I_S	Source current
$I_{D(ON)}$	Leakage current from an “ON” driver into the switch
$I_{D(OFF)}$	Leakage current into the drain terminal of an “OFF” switch
$I_{S(OFF)}$	Leakage current into the source terminal of an “OFF” switch
t_{ON}	Switching time as defined in figure 5
t_{OFF}	Switching time as defined in figure 5
V_A	Analog signal voltage
I_R	Reference current
V_R	Reference voltage
V_{CTE}	Charge transfer error
V_{CT}	Crosstalk between switches
V_{ISO}	Isolation from source to drain of a closed switch

6.6 Logistic support. Lead materials and finishes (see 3.4) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish A (see 3.4). Longer length leads and lead forming should not affect the part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information should not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-PRF-38535.

Military device type	Generic-industry type
01	181A
02	182A
03	184A
04	185A
05	187A
06	188A
07	190A
08	191A

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army – CR
Navy - EC
Air Force - 11
NASA – NA
DLA – CC

Preparing activity:
DLA - CC

Project 5962-1994

Review activities:
Army – MI, SM
Navy – AS, CG, MC, SH, TD
Air Force – 03, 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:21Z
Check the source to verify that this is the current version before use.