FED. SUP CLASS
2805

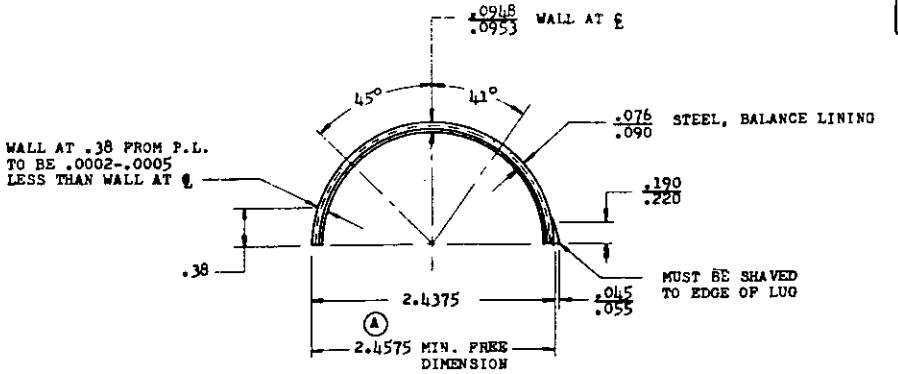

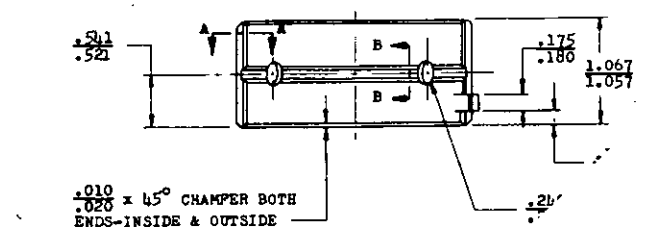



SECTION A-A



SECTION B-B

Ⓓ CANCELED AFTER 23 JUNE 1982
NO SUPERSEDING STANDARD

NOTES:

1. MATERIAL: COPP ON
2. PLATING: I LEAD-TIN
3. IN 2.4375 (NS) BLOCK AND A
4. REMOVE ALL BU
5. MS PART NUMBE(AKI ACTURER'S IDENTIFICATION TO BE CLEARLY MARKED WITHOUT INTERFERING WITH THE FUNCTION OF . 'ART
6. TOLERANCES: UNLES(,ISE SPECIFIED, LINEAR MACHINED DIMENSIONS ± .010: ANGULAR MACHINED DIMENSIONS ± 30'. DO NOT . .E DRAWING.
7. FOR DESIGN FEATURE PUR.OSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
9. ALL DIMENSIONS IN INCHES.

TO A THICKNESS .001 NOMINAL. FLASH-TIN PLATE ALL OVER AFTER

ONE PARTING LINE FACE AGAINST A STOP AT HORIZONTAL CENTER LINE OF N OTHER P.L. FACE. HEIGHT WILL BE 1.21925-1.22025 ON SIDE OPPOSITE STOP.

Ⓓ 23 JUNE 1982
Ⓒ 8 JULY 1966
Ⓑ 24 OCTOBER 1955
Ⓐ 27 NOVEMBER 1953
APPROVED 19 JUNE 1952 REVISED

Ⓒ ENTIRE STANDARD REVISED

PART NO. MS 13989-1

P.A. Army - MO(ERDL) Other Cust A.F. - 69 NAVY - YD	TITLE BEARING, SLEEVE: ENGINE, PLAIN, 2-1/4" X 1-1/16"	MILITARY STANDARD MS 13989
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 1

REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:31Z
Check the source to verify that this is the current version before use.