
FED SUP CLASS
5950

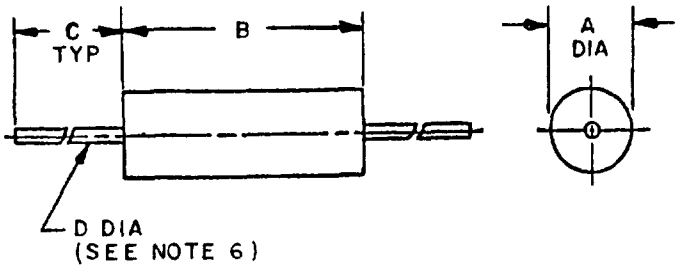


| RATINGS | |
|---|---|
| Style | LT10 |
| Grade | 1 |
| Class | A |
| Temperature rise | 15° C |
| Ambient temperature | 90° C |
| Operating temperature | -55° to +105° C |
| Dielectric withstanding Voltage (sea level) | 1000 volts rms for a minimum of 60 sec |
| Dielectric withstanding Voltage (reduced barometric pressure) | 200 volts rms for a minimum of 60 sec |
| Terminal pull | 5 pounds |
| Altitude | 70, 000 feet |
| Weight | 2.0 grams max |

| Ltr | Dimensions in inches with metric equivalents (mm) in parentheses | |
|---|---|---|
| | Minimum | Maximum |
| A | .240 (6.10) | .260 (6.60) |
| B | .550 (13 97) | .570 (14.48) |
| C | 1.250 (31.75) | 1.625 (41.28) |
| D | 023 (.58) | .027 (.69) |

ELECTRICAL CHARACTERISTICS (INITIAL)

| Dash No. 1/ | Type designation 2/ | Former type designation | Superseded MS part no. | Inductance ±10% | Q min | Test freq. | Self-resonant frequency Min | DC resistance Max | Rated DC current |
|---|---|---|---|---|---|---|---|---|---|
| | | | | uh | | MHz | MHz | Ohms | Ma |
| -1 | LT10K138 | LT4K054 | MS75052-3 | 68 | 70 | 2.5 | 13.0 | 3.3 | 168 |
| -2 | LT10K139 | LT4K055 | -4 | 82 | 65 | 2.5 | 11.7 | 3.5 | 162 |
| -3 | LT10K140 | LT4K056 | -5 | 100 | 65 | 2.5 | 10.7 | 3.8 | 155 |
| -4 | LT10K141 | LT4K057 | -6 | 120 | 75 | .790 | 9.3 | 4.7 | 142 |
| -5 | LT10K142 | LT4K058 | -7 | 150 | 75 | .790 | 8.3 | 5.3 | 132 |

1/ The dash number added to the MS military-standard number constitutes the MS part number, for example, MS 14047-1.

2/ The decrease in maximum operating temperature from 125° C to 105° C does not downgrade these coils but assures satisfactory operation at 105° C for a minimum of 2000 hours of life rather than a shorter period of operation at 125° C

APPROVED 15 February 1972 REVISED

User activities: Army, Navy, Air Force

Reviewer activities: Army MI, MU, SL; Navy OS; Air Force 11, 17, 80; DSA-ES

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | | |
|---|---|---|---|
| P A NAVY-EC<br>Other Cust AF-80<br>ARMY-EL | International interest | TITLE Coils, radio frequency, molded, fixed, subminiature (iron core) types LT10K138 to LT10K142 incl. | MILITARY STANDARD<br>MS14047 |
| Procurement Specification<br>MIL-C-15305 | | SUPERSEDES<br>MS75052 in part Part Nos. 75052-3 thru 75052-7 | SHEET 1 OF 2 |

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5950-0397-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5950

| Electrical Characteristics (Final) | | | | |
|---|---|---|---|---|
| Inspection Group | Allowable variation from initial measurement | | Allowable % from specified minimum value in Electrical Characteristics (initial) table | |
| | Inductance Percent | DC resistance | Self-resonant frequency | Q |
| Qualification Inspection | | | | |
| Group II | ±2 | -- | -- | - 10 |
| Group III | ±5 | ±(3%+.001ohm) | - 8 | - 10 |
| Group IV | ±5 | ±(2%+ 001ohm) | - 10 | - 15 |
| Quality Conformance Inspection | | | | |
| Group C | | | | |
| Subgroup I | ±2 | -- | -- | - 10 |
| Subgroup II | ±5 | ±(2%+.001ohm) | - 10 | - 15 |
| Subgroup III | ±5 | ±(3%+ 001ohm) | - 8 | - 10 |

NOTES.
1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25 4 mm.
3. These coils are intended to be mounted by the body.
4. The polarizing voltage during the moisture-resistance tests is applied with the positive lead connected to the coil terminals tied together, and the negative lead connected to the metal strap.
5. Terminal strength (Pull) test, is not applicable in "Group B" inspection Table VII.
6. Solderable/weldable lead wire, AWG #22.
7. Barometric pressure test (test condition C) is applicable.
8. Shock, specified pulse, method 213, test condition I, is applicable
9. Referenced document shall be the issue in effect on date of invitation for bid
10. This standard takes precdence over the procurement specification referenced herein.

User activities: Army Navy Air Force

Reviewer activities: Army Navy Air Force

REVISED

APPROVED

| P A. NAVY-EC<br>Other Cust AF-80<br>ARMY-EL | International interest | TITLE Coils, radio frequency, molded, fixed, subminiature (iron core) types LT10K138 to LT10K142 incl. | MILITARY STANDARD<br>MS14047 |
|---|---|---|---|
| Procurement Specification<br>MIL-C-15305 | | SUPERSEDES:<br>MS75052 in part Part Nos. 75052-3 thru 75052-7 | SHEET 2 |

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new design/engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N 0102-014 1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.