INCH-POUND


MS14315D
W/AMENDMENT 1
10 July 2025
SUPERSEDING
MS14315D
1 November 2015

DETAIL SPECIFICATION SHEET

BUSHINGS, PIPE, BRASS OR BRONZE, THREADED (OUTSIDE HEAD, INSIDE HEAD, AND FACE) CLASS 250

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and WW-P-460.

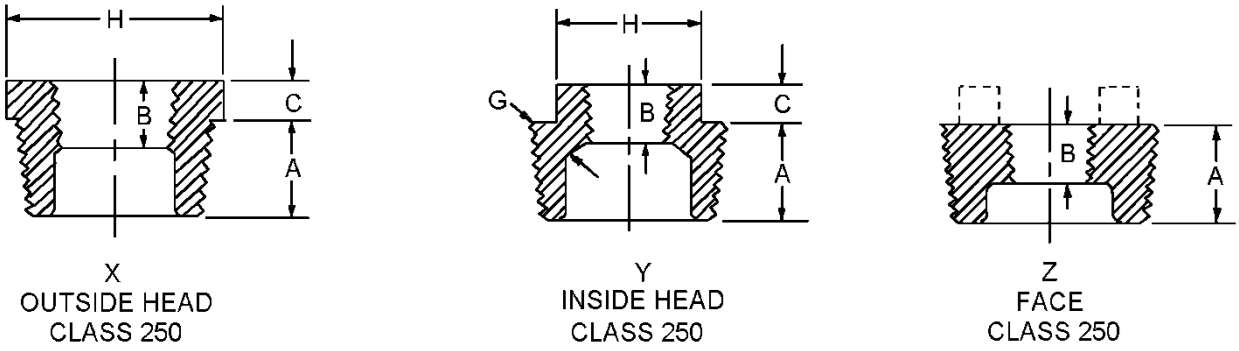

X
OUTSIDE HEAD
CLASS 250

Y
INSIDE HEAD
CLASS 250

Z
FACE
CLASS 250

FIGURE 1. Bushing dimensions and configurations.

AMSC N/A
DISTRIBUTION STATEMENT A: Approved for public release; Distribution is unlimited.

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:40Z
Check the source to verify that this is the current version before use.

Dash number	Nominal pipe size fractional (inch)	Nominal pipe size decimal (inch)	Nominal pipe size metric (mm)
-1	1/4 X 1/8	.250 X .125	6.35 X 3.18
-2	3/8 X /1/4	.375 X .250	9.53 X 6.35
-3	3/8 X 1/8	.375 X .125	9.53 X 3.18
-4	1/2 X 3/8	.500 X .375	12.70 X 9.53
-5	1/2 X 1/4	.500 X .250	12.70 X 6.35
-6	1/2 X 1/8	.500 X .125	12.70 X 3.18
-7	3/4 X 1/2	.750 X .500	19.05 X 12.70
-8	3/4 X3/8	.750 X .375	19.05 X 9.53
-9	3/4 X 1/4	.750 X .250	19.05 X 6.35
-10	1 X 3/4	1.000 X .750	25.40 X 19.05
-11	1 X 1/2	1.000 X .500	25.40 X 12.70
-12	1 X 3/8	1.000 X.375	25.40 X 9.53
-13	1 X 1/4	1.000 X .250	25.40 X 6.35
-14	1 1/4 X 1	1.250 X 1.000	31.75 X 25.40
-15	1 1/4 X 3/4	1.250 X .750	31.75 X 19.05
-16	1 1/4 X 1/2	1.250 X .500	31.75 X 12.70
-17	1 1/4 X 3/8	1.250 X .375	31.75 X 9.53
-18	1 1/2 X 1 1/4	1.500 X 1.250	38.10 X 31.75
-19	1 1/2 X 1	1.500 X 1.000	38.10 X 25.40
-20	1 1/2 X 3/4	1.500 X .750	38.10 X 19.05
-21	1 1/2 X 1/2	1.500 X .500	38.10 X 12.70
-22	2 X 1 1/2	2.000 X 1.500	50.80 X 38.10
-23	2 X 1 1/4	2.000 X 1.250	50.80 X 31.75
-24	2 X 1	2.000 X 1.000	50.80 X 25.40
-25	2 X 3/4	2.000 X .750	50.80 X 19.05
-26	2 X 1/2	2.000 X .500	50.80 X 12.70
-27	2 1/2 X 2	2.500 X 2.000	63.50 X 50.80
-28	2 1/2 X 1 1/2	2.500 X 1.500	63.50 X 38.10
-29	2 1/2 X 1 1/4	2.500 X 1.250	63.50 X 31.75
-30	2 1/2 X 1	2.500 X 1.000	63.50 X 25.40
-31	3 X 2 1/2	3.000 X 2.500	76.20 X 63.50
-32	3 X 2	3.000 X 2.000	76.20 X 50.80
-33	3 X 1 1/2	3.000 X 1.500	76.20 X 38.10
-34	3 X 1 1/4	3.000 X 1.250	76.20 X 31.75
-35	4 X 3	4.000 X 3.000	101.60 X 76.20
-36	4 X 2 1/2	4.000 X 2.500	101.60 X 63.50
-37	4 X 2	4.000 X 2.000	101.60 X 50.80
-38	4 X 1 1/2	4.000 X 1.500	101.60 X 38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Dimensions including A, B, C, G, and H shall be in accordance with ASME B16.15.

FIGURE 1. Bushing dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:40Z
Check the source to verify that this is the current version before use.

Requirements

Material:


Non-potable water: Brass or bronze (leaded) in accordance with ASME-B16.15.

Potable water: Brass alloys C89510 or C89520 in accordance with ASTM B584 or C89550 in accordance with Copper Development Association Inc.

Threads: In accordance with ASME-B16.15.

Protective coating: None.

PIN: The PIN consists of the MS prefix, specification number, dash number for size, bushing designator, right hand thread designator (Blank), non-potable water (Blank) or potable water dash letters (-PW). When left-hand threads are required, add the letter “L” to the PIN.

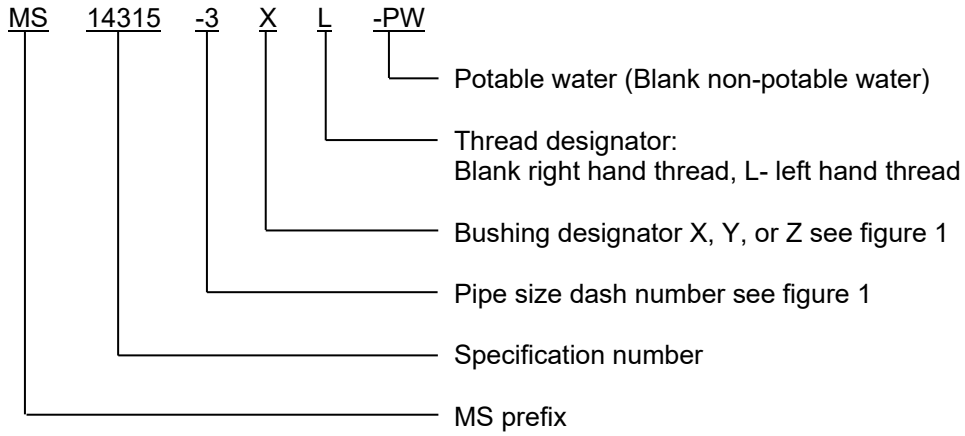

Examples:

MS14315-24X represents a 2 inch Nominal Pipe Size (NPS) X 1 inch NPS outside head bushing, non-potable.
MS14315-24X-PW represents a 2 inch NPS X 1 inch NPS outside head bushing, potable water.
MS14315-35ZL represents a 4 inch NPS X 3 inch NPS face bushing, left hand threads, non-potable water.
MS14315-35ZL-PW represents a 4 inch NPS X 3 inch NPS face bushing, left hand threads, potable water.

Legacy information:

Class 125 was changed to 250 to harmonize with ASME B16.15.
Corrected -4 and -5, both were calling out 1/2 inch NPS X 3/8 inch NPS. Changed -4 to callout 1/2 inch NPS X3/8 inch NPS and -5 to 1/2 inch NPS X 1/4 inch NPS.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:40Z
Check the source to verify that this is the current version before use.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Brass fittings for potable water use may be substituted for non-potable water brass fittings. Non-potable brass fittings shall not be substituted for potable water fittings.

January 4, 2014, Federal Public Law 111-380 prohibits the sale of plumbing fixtures with a wetted surface area containing more than a weighted average of 0.25% lead.

Marking: In accordance with ASME-B16.15, additional marking for potable water fittings shall be as described below.

Potable water fittings. Brass bushings for potable water systems shall be certified and marked as specified:

Many State plumbing codes require the use of products that are in compliance with NSF/ANSI standards 61 and 372. NSF/ANSI Standard 372 is a certification process by which independent laboratories verify that the plumbing product is in compliance with the requirements of the 2011 Reduction of Lead in Drinking Water Act. Products will bear the mark of the laboratory that has independently certified that the product meets the standard. EPA published a brochure to assist the public with identifying the various marks that indicate a product has been certified as lead free to the new requirement of the Act: "How to Identify Lead Free Certification Marks for Pipes, Fittings, Fixtures, Solder, and Flux Used for Drinking Water." You can access the document at How to Identify Lead Free Certification Marks for Pipes, Fittings, Fixtures, Solder, and Flux Used for Drinking Water | US EPA.

Non-potable water fittings. Brass bushings not for potable water systems shall be tagged:

NOT FOR USE IN POTABLE WATER SYSTEMS.

The tag shall be removable by the end item user.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to WW-P-460, this document references the following:

Reduction of Lead in Drinking Water Act
ASME-B16.15
ASTM B584
NSF/ANSI standards 61
NSF/ANSI Standard 372

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:40Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - MC
Air Force – 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2025-054)

Review activities:
Army - AR, CE, EA
Navy - SA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:40Z
Check the source to verify that this is the current version before use.