
USER SYMBOLS:
NAVY - MC, OS
USAF - 11
ARMY - AT, ME

REVIEWER SYMBOLS:
NAVY - EC, SH
USAF - 11, 99
ARMY - MI

"Quotation/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5940

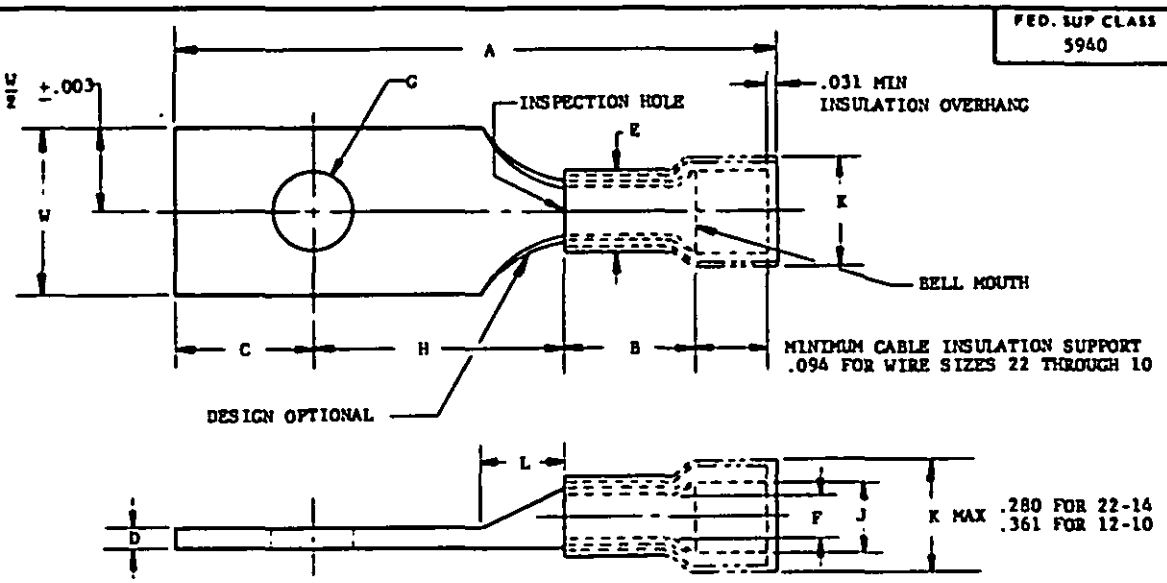

FOR TABLES I AND II SEE SHEETS 2 AND 3.

REQUIREMENTS:

1. MATERIAL: SEE ACQUISITION SPECIFICATION.
2. FINISH: METAL, TIN PLATE. SEE ACQUISITION SPECIFICATION.
3. QUALIFICATION: FOR QUALIFICATION, TERMINALS SHALL BE TESTED WITH MIL-C-915 AND MIL-C-2194 CABLE AND TOOLING AS FOLLOWS.

TOOLING

(F) MIL-C-22520/5-01 TOOLING WITH MIL-C-22520/5-100 DIES INSTALLED FOR SIZES 22 THRU 10 TERMINALS; OR MIL-C-22520/10-01 TOOLING WITH MIL-C-22520/10-101 DIES INSTALLED FOR SIZES 22 THRU 14 TERMINALS AND MIL-C-22520/10-100 DIES INSTALLED FOR SIZES 12 THRU 10 TERMINALS. EXISTING MS90413 AND MS3316 TOOLS IN THE FIELD MAY BE USED UNTIL WORN OUT.

4. THE COMBINATION OF DIMENSIONS H, C AND L MUST PERMIT WIRE TERMINALS TO BE STACKED ON ONE STUD ON THE FOLLOWING TERMINAL BOARDS IN THE QUANTITY SHOWN

STYLE	TERMINAL BOARD MIL-T-55164	QUANTITY OF WIRED TERMINALS
L80	-/10	4
L81	-/12	4
L82	-/19	4
L83	-/14	2
L84	-/16	4
L85	-/25	3
L86	-/24	2

NOTES:

1. DIMENSIONS IN INCHES.
2. (F) METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. CONTOUR INDICATED BY PHANTOM LINES MAY VARY FROM THAT SHOWN TO SUIT INDIVIDUAL MANUFACTURER'S DESIGN.
5. INSULATION SUPPORT AND TERMINAL BARREL MAY BE MULTIPLE-PIECE CONSTRUCTION.
6. CABLE INSERTION SHALL BE FACILITATED BY BELL MOUTH
7. MS17143 TERMINALS ARE DESIGNED FOR USE WITH MIL-T-55164 TERMINAL BOARDS

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFFRENCED HEREIN REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(F) DENOTES CHANGES

APPROVED 10 AUG 1960 REVISED (E) 17 JAN 73 (F) 8 JUNE 1981

P.A. NAVY - AS Other Cust ARMY - ER USAF - 85	TITLE TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RECTANGULAR TONGUE, TYPE II, CLASS 1 FOR 105°C TOTAL CONDUCTOR TEMPERATURE	MILITARY STANDARD MS17143
ACQUISITION SPECIFICATION MIL-T-7928	SUPERSEDES	SHEET 1 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated)

PROJECT NO. 5940-0826

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
NAVY - EC, SH
USAF - 11, 99
ARMY - MI

USER SYMBOLS:
NAVY - MC, OS
USAF -
ARMY - AT, ME

DD FORM 1 MAR 72 672-1 (Coordinated)

P.A.
NAVY - AS
Other Cust
ARMY - ER
USAF - 85

ACQUISITION SPECIFICATION
MIL-T-7928

SUPERSEDES

TITLE
TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RECTANGULAR TONGUE, TYPE II, CLASS 1 FOR 105°C TOTAL CONDUCTOR TEMPERATURE

MILITARY STANDARD

MS17143

SHEET 2 OF 3

PLATE NO 23063

FED. SUP CLASS 5940

(F)

TABLE I

DASH NO.	WIRE SIZE AWG	STUD SIZE (DEC)	A MAX	B MIN	C ±.010	D	E DIA	F DIA	G DIA	H MIN	J MIN DIA	L MAX	W ±.005	INSULATION SLEEVE COLOR
1	22-18		1.359	.156		.037 .029	.215 .190	.070 .052			.120			RED
2	16-14	8 (.164)	1.359	.156	.310	.037 .029	.240 .210	.090 .081	.178 .168	.621	.153	.281	.390	BLUE
3	12-10		1.531	.234		.046 .035	.300 .275	.135 .129			.210			YELLOW
4	22-18		1.109	.156		.037 .029	.215 .190	.070 .052			.120			RED
5	16-14	6 (.138)	1.109	.156	.227	.037 .029	.240 .210	.090 .081	.152 .142	.465	.153	.250	.302	BLUE
6	12-10		1.281	.234		.046 .035	.300 .275	.135 .129			.210			YELLOW
7	22-18		1.109	.156		.037 .029	.215 .190	.070 .052			.120			RED
8	16-14	8 (.164)	1.109	.156	.227	.037 .029	.240 .210	.090 .081	.178 .168	.465	.153	.250	.302	BLUE
9	12-10		1.281	.234		.046 .035	.300 .275	.135 .129			.210			YELLOW
10	22-18		.859	.156		.037 .029	.215 .190	.070 .052			.120			RED
11	16-14	5 (.125)	.859	.156	.143	.037 .029	.240 .210	.090 .081	.137 .129	.277	.153	.125	.277	BLUE
12	12-10		1.046	.234		.046 .035	.300 .275	.135 .129			.210			YELLOW
13	22-18		1.015	.156		.037 .029	.215 .190	.070 .052			.120			RED
14	16-14	6 (.138)	1.015	.156	.195	.037 .029	.240 .210	.090 .081	.152 .142	.404	.153	.156	.237	BLUE
15	12-10		1.203	.234		.046 .035	.300 .275	.135 .129			.210			YELLOW
16	22-18		1.015	.156		.037 .029	.215 .190	.070 .052			.120			RED
17	16-14	4 (.112)	1.015	.156	.195	.037 .029	.240 .210	.090 .081	.122 .114	.404	.153	.156	.237	BLUE
18	12-10		1.203	.234		.046 .035	.300 .275	.135 .129			.210			YELLOW
19	22-18		.796	.156		.037 .029	.215 .190	.070 .052			.120			RED
20	16-14	4 (.112)	.796	.156	.143	.037 .029	.240 .210	.090 .081	.122 .114	.237	.153	.125	.237	BLUE
21	12-10		.984	.234		.046 .035	.300 .275	.135 .129			.210			YELLOW

TABLE II

TONGUE SHAPE (REFERENCE ONLY)	TERMINAL SIZE NAVY WIRE SIZE (REFERENCE ONLY)
L80P-1	1 -2
L80P-2	2 1/2 -4
L80P-3	6 -9
L81P-1	1 -2
L81P-2	2 1/2 -4
L81P-3	6 -9
L82P-1	1 -2
L82P-2	2 1/2 -4
L82P-3	6 -9
L83P-1	1 -2
L83P-2	2 1/2 -4
L83P-3	6 -9
L84P-1	1 -2
L84P-2	2 1/2 -4
L84P-3	6 -9
L85P-1	1 -2
L85P-2	2 1/2 -4
L85P-3	6 -9
L86P-1	1 -2
L86P-2	2 1/2 -4
L86P-3	6 -9

APPROVED 10 AUG 1960 REVISED F FOR CHANGES SEE SHTS 1, 2 & 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS: NAVY - EC, SH; USAF - 11, 99; ARMY - MI

USER SYMBOLS: NAVY - MC, OS; USAF -; ARMY - AT, ME

TABLE I (Continued)

DASH NO.	WIRE SIZE AWG	STUD SIZE (DEC)	A MAX	B MIN	C ±.010	D	E DIA	F DIA	G DIA	H MIN	J MIN DIA	L MAX	W ±.005	INSULATION SLEEVE COLOR
22	22-18	6 (.138)	.859	.156	.125	.037 .029	.215 .190	.070 .052	.152 .142	.312	.120	.156	.250	RED
23	22-18	6 (.138)	.796	.156	.140	.037 .029	.215 .190	.070 .052	.152 .142	.203	.120	.156	.296	RED
24	22-18	8 (.164)	.984	.156	.187	.037 .029	.215 .190	.070 .052	.178 .168	.375	.120	.156	.312	RED
25	22-18	10 (.190)	.906	.156	.203	.037 .029	.215 .190	.070 .052	.205 .195	.281	.120	.156	.375	RED
26	26-24	2 (.086)	.744	.126	.110	.028 .022	.215 .190	.033 .027	.098 .090	.203	.084	.125	.182	YELLOW
27	26-24	4 (.112)	.811	.126	.143	.028 .022	.215 .190	.033 .027	.122 .114	.237	.084	.125	.237	YELLOW
28	22-18	2 (.086)	.744	.156	.110	.037 .029	.215 .190	.070 .052	.098 .090	.203	.120	.125	.182	RED

TABLE II (Continued)

TONGUE SHAPE (REFERENCE ONLY)	TERMINAL SIZE NAVY WIRE SIZE (REFERENCE ONLY)	
	1	-2
	1	-2
	1	-2
	1	-2

TABLE III. METRIC CONVERSIONS

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.081	2.06	.135	3.43	.187	4.75	.277	7.04	.621	15.78
.005	0.13	.084	2.13	.137	3.48	.190	4.83	.280	7.11	.744	18.90
.010	0.25	.086	2.18	.138	3.51	.195	4.95	.281	7.14	.796	20.22
.022	0.56	.090	2.29	.140	3.56	.203	5.16	.296	7.52	.811	20.60
.027	0.69	.098	2.49	.142	3.61	.205	5.21	.300	7.62	.859	21.82
.028	0.71	.110	2.79	.143	3.63	.210	5.33	.302	7.67	.906	23.01
.029	0.74	.112	2.84	.152	3.86	.215	5.46	.310	7.87	.984	24.99
.031	0.79	.114	2.90	.153	3.89	.227	5.77	.312	7.92	1.015	25.78
.033	0.84	.120	3.05	.156	3.96	.234	5.94	.361	9.17	1.046	26.57
.035	0.89	.122	3.10	.164	4.17	.237	6.02	.375	9.53	1.109	28.17
.037	0.94	.125	3.18	.168	4.27	.240	6.10	.390	9.91	1.203	30.56
.046	1.17	.126	3.20	.178	4.52	.250	6.35	.404	10.26	1.281	32.54
.052	1.32	.129	3.28	.182	4.62	.275	6.99	.465	11.81	1.359	34.52
.070	1.78									1.531	38.89

APPROVED 10 AUG 1960 REVISED (F) FOR CHANGES SEE SHEETS 1, 2 & 3

FED. SUP CLASS 5940

DD FORM 1426 672-1 (Coordinated)

PREPARING ACTIVITY: NAVY - AS; Other Cust: ARMY - ER; USAF - 85

ACQUISITION SPECIFICATION: MIL-T-7928

SUPERSEDES

TITLE: TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RECTANGULAR TONGUE, TYPE II, CLASS 1 FOR 105°C TOTAL CONDUCTOR TEMPERATURE

SHEET 3 OF 3

MILITARY STANDARD

MS17143

PLATE NO 27316

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.