AMSC N/A

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

REVIEWER ACTIVITIES
ARMY-AR
AIR FORCE-99
DLA-IS

USER ACTIVITIES
ARMY-CR, MI

DD FORM 672-1 (REVERSE) UNCLASSIFIED

PREPARING ACTIVITY: NAVY-AS (INTERNATIONAL INTEREST)

Owner Cont

AGENCY: ARMY-AV
AIR FORCE-11

PROCUREMENT SPECIFICATION: MIL-N-25027

SUPERSEDES: NAS682, NAS 1025 IN PART

TITLE: NUT, SELF-LOCKING, PLATE, ONE LUG, LOW HEIGHT, CRES, 125 KSI Ftu, 450° AND 800°F

MILITARY STANDARD

MS21052

PAGE 1 OF 3

5310-1534

(F) ENTIRE STANDARD REVISED

FED SUP CLASS 5310

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS SPECIFIED HEREIN

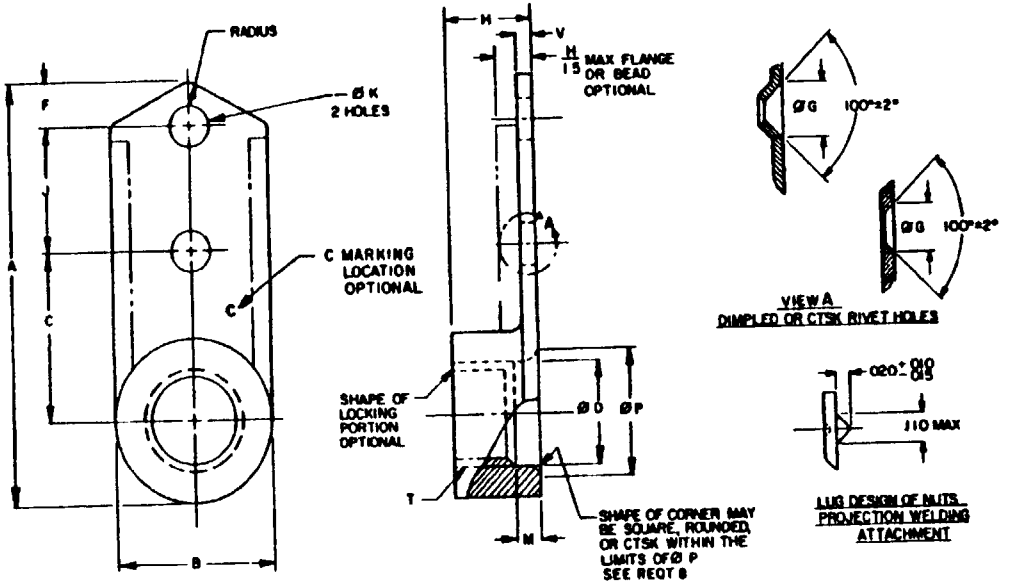


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBERS 450°F PLAIN HOLES	450°F CTSK OR DIMPLED HOLES	450°F WELDING PROJECTION	800°F PLAIN HOLES	800°F CTSK OR DIMPLED HOLES	800°F WELDING PROJECTION	T THREAD SIZES	A MAX	B MAX	B MIN	C ±.005	ØD MIN	F MIN	ØG ±.010	H 1/ MAX	J 2/ ±.002	ØE 1/ +.005 -.000	M MIN	ØP MAX	V MAX	AXIAL STRENGTH LBS/MIN	WEIGHT LBS/100
L02	L02K	L02W	-02	-02K	-02W	086-56 UNJC-3B	.935	297	239	344	---	100	200	171	312	098	---	206	047	1,130	28
L04	L04K	L04W	-04	-04K	-04W	112-40 UNJC-3B	935	297	239	344	---	100	.200	171	312	098	---	206	.047	1,130	28
L06	L06K	L06W	-06	-06K	-06W	138-32 UNJC-3B	935	297	239	344	---	100	200	171	312	098	---	206	047	1,130	28
L08	L08K	L08W	-08	-08K	-08W	164-32 UNJC-3B	935	297	277	344	168	100	200	250	312	098	---	248	047	1,720	29
L1	L1K	L1W	-1	-1K	-1W	190-32 UNJF-3B	950	338	308	344	194	100	200	250	312	098	.062	274	047	2,460	33
L4	L4K	L4W	-4	-4K	-4W	250-28 UNJF-3B	993	614	375	344	254	100	200	281	312	098	062	344	055	4,580	57
L5	L5K	L5W	-5	-5K	-5W	3125-24 UNJF-3B	1 210	505	485	500	317	125	230	328	312	.130	.062	417	065	7,390	96
L6	—	L6W	-6	—	-6W	375-24 UNJF-3B	1 264	614	594	500	379	.125	1/2	344	312	130	062	505	075	11,450	1 44
L7	—	L7W	-7	—	-7W	4375-20 UNJF-3B	1 446	726	697	562	442	156	.30	390	344	161	062	602	085	15,450	2 02

1/ MINIMUM "H" NOT SPECIFIED LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION
2/ CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005
3/ DIMPLED RIVET HOLE TOLERANCE FOR Ø"E" IS +.01, -.000

APPROVED 12 JUN 64 REVISED (F) 30 SEP 87

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1 MATERIAL CORROSION RESISTANT STEEL, TYPE A286, (UNS S66286) IN ACCORDANCE WITH AMS5525, AMS5732 OR AMS5737

2 FINISH ONLY 800°F NUTS SILVER PLATE ALL THREADED SURFACES OF NUT ELEMENT IN ACCORDANCE WITH AMS 2410 THREADS SHALL SHOW COMPLETE COVERAGE SILVER PLATING ON ALL OTHER SURFACES OPTIONAL TARNISHING OR DISCOLORATION OF SILVER NOT CAUSE FOR REJECTION.

3 LUBRICANT ONLY 450°F NUTS: DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-N-25027

4 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

5. HARDNESS: 49HRC, MAX.

6. THREADS THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879

7. SURFACE TEXTURE SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI B46.1.

8 COUNTERBORE/COUNTERSINK ON SIZE .164 AND LARGER, COUNTERBORE THREAD "D" DIAMETER X .062 DEEP MINIMUM THREAD RELIEF, ON SIZE .138 AND SMALLER, COUNTERSINK TO "P" DIAMETER WITHIN THE LIMITS OF D, P AND M

9 PERFORMANCE: SEE PROCUREMENT SPECIFICATION, EXCEPT 450°F DRY FILM LUBRICATED NUTS LIMITED TO FIVE REUSE CYCLES.

10. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS21052L4K

DASH NUMBER

BASIC MS NUMBER

MS21052L4K INDICATES: NUT, SELF-LOCKING, PLATE, ONE LUG, LOW HEIGHT, CRES, 125 KSI Ftu, 450°F, DRY FILM LUBRICATION, .250-28 UNJF-3B; COUNTERSUNK OR DIMPLED HOLES

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

4. DESIGN AND USAGE LIMITATIONS: THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS. THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588. ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

APPROVED 12 JUN 64 REVISED (F) FOR CHANGES SEE PAGES 1,2 AND 3

ARMY-CR,MI

AREAS MCFT
ARMY-AR
AIR FORCE-99
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Distribution for all new engineering and design applications and for replacement shall be made from this document when applicable

P A NAVY-AS Other Cust ARMY-AV AIR FORCE-11	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, ONE LUG, LOW HEIGHT, CRES, 125 KSI Ftu, 450° AND 800°F	MILITARY STANDARD MS21052
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS682, NAS1025 IN PART		PAGE 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5310

INTERCHANGEABILITY RELATIONSHIP

MS21052 NUTS CAN UNIVERSALLY REPLACE NAS682 NUTS OF LIKE MATERIAL, THREAD SIZE, LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT), AND FASTENING METHOD (PLAIN RIVET HOLES, DIMPLED OR COUNTERSUNK RIVET HOLES OR PROJECTION WELDING), BUT THESE NAS682 NUTS CANNOT UNIVERSALLY REPLACE MS21052 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBER	SUBSTITUTIVE PART NUMBER	CANCELLED PART NUMBER	SUBSTITUTIVE PART NUMBER
NAS682C06	MS21052-06	NAS682C5	MS21052-5
NAS682C06K	MS21052-06K	NAS682C5K	MS21052-5K
—	MS21052-06W	—	MS21052-5W
NAS682C06M	MS21052L06	NAS682C5M	MS21052L5
NAS682C06MK	MS21052L06K	NAS682C5MK	MS21052L5K
—	MS21052L06W	—	MS21052L5W
NAS682C08	MS21052-08	NAS682C6	MS21052-6
NAS682C08K	MS21052-08K	—	MS21052-6W
—	MS21052-08W	NAS682C6M	MS21052L6
NAS682C08M	MS21052L08	—	MS21052L6W
NAS682C08MK	MS21052L08K	NAS682C7	MS21052-7
—	MS21052L08W	—	MS21052-7W
NAS682C3	MS21052-3	NAS682C7M	MS21052L7
NAS682C3K	MS21052-3K	—	MS21052L7W
—	MS21052-3W		
NAS682C3M	MS21052L3		
NAS6823CMK	MS21052L3K		
—	MS21052L3W		
NAS682C4	MS21052-4		
NAS682C4K	MS21052-4K		
—	MS21052-4W		
NAS682C4M	MS21052L4		
NAS682C4MK	MS21052L4K		
—	MS21052L4W		

USER ACTIVITIES:
ARMY-CR, MI

REVIEWER ACTIVITIES:
ARMY-AR
AIR FORCE-99
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

APPROVED 12 JUN 64 REVISED (F) FOR CHANGES SEE PAGES 1, 2 AND 3

P A NAVY-AS Other Cust ARMY-AV AIR FORCE-11	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, ONE LUG, LOW HEIGHT, CRES, 125 KSI Ftu, 450° AND 800°F	MILITARY STANDARD MS21052
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS682, NAS1025 IN PART		PAGE 3 OF 3

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1534

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.