
PROJECT NO. 4730-0566

FED. SUP CLASS
4730

THIS ILLUSTRATION IS FOR IDENTIFICATION PURPOSES ONLY AND IS NOT INTENDED TO RESTRICT DESIGNS AND SHAPES OF FASTENING DEVICES. WHICH WILL OTHERWISE CONFORM TO SPECIFICATION REQUIREMENTS AND ARE WITHIN THE ENVELOPE DIMENSIONS.

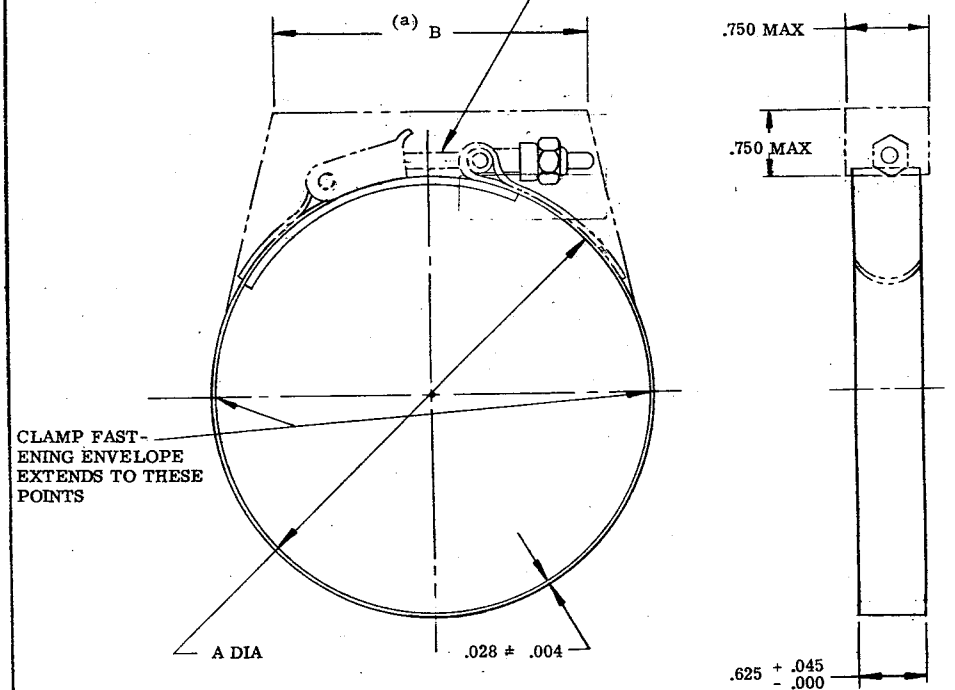


(a) B DIMENSION APPLIES WHEN THE CLAMP IS IN THE TIGHTENED CONDITION AT THE MAXIMUM AND MINIMUM POSITIONS OF ITS DIAMETRAL RANGE.

NOTES:

1. MATERIAL: BAND, STEEL, CORROSION-RESISTANT 1/2 HARD IN ACCORDANCE WITH MIL-S-5059, BOLT AND NUT: STEEL ALLOY IN ACCORDANCE WITH MIL-B-6812.
2. FINISH: CORROSION-RESISTANT STEEL PARTS, PASSIVATE. STEEL ALLOY PARTS, CADMIUM PLATE, QQ-P-416, TYPE II, CLASS 3.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. DIMENSIONS IN INCHES.
5. WHEN T-BOLTS ARE USED, THE HEAD/SHANK FILLET RADIUS SHALL BE .030 INCH MINIMUM.

FOR INACTIVE PART NO'S SEE SHEET 3.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 31 AUG 54 — REVISED (A) 27 OCT 59 — (B) 11 APR 72 — (C) 8 DEC 75

(C) REVISED

| | | |
|---|---|---|
| P.A. NAVY - AS<br>Other Cust<br>ARMY - ME<br>USAF - 82 | TITLE<br>CLAMP, HOSE<br>(FLAT BAND, 500°F) | MILITARY STANDARD<br>MS21920 |
| PROCUREMENT SPECIFICATION<br>MIL-C-8783 | SUPERSEDES: | SHEET 1 OF 3 |

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

USER SYMBOLS: DSA - GS

REVIEWER SYMBOLS: ARMY - ME

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

| MS PART NO. CVNTL LATCH | MS PART NO. QUICK RELEASE LATCH | A INSIDE DIAMETRAL RANGE EXT'D MIN | A INSIDE DIAMETRAL RANGE CPRS'D MAX | B MAX (a) CVNTL TYPE | B MAX (a) QUICK RELEASE TYPE | ADJM'T RANGE REF | WT LBS MAX QUICK RELEASE | WT LBS MAX CVNTL (C) |
|---|---|---|---|---|---|---|---|---|
| MS21920-20 | MS21920-20R | 2.50 | 2.25 | | | | .139 | .095 |
| -22 | -22R | 2.75 | 2.50 | | | | .143 | .099 |
| -24 | -24R | 3.00 | 2.75 | | | | .146 | .102 |
| -26 | -26R | 3.25 | 3.00 | | | .25 | .150 | .106 |
| -28 | -28R | 3.50 | 3.25 | | | | .153 | .109 |
| -30 | -30R | 3.75 | 3.50 | | | | .157 | .113 |
| -33 | -33R | 4.12 | 3.75 | | | | .164 | .120 |
| -35 | -35R | 4.38 | 4.00 | | | | .167 | .123 |
| -37 | -37R | 4.62 | 4.25 | | | | .171 | .127 |
| -39 | -39R | 4.88 | 4.50 | 3.0 | | | .174 | .130 |
| -41 | -41R | 5.12 | 4.75 | | 3.4 | | .178 | .134 |
| -43 | -43R | 5.38 | 5.00 | | | | .181 | .137 |
| -45 | -45R | 5.62 | 5.25 | | | | .185 | .141 |
| -47 | -47R | 5.88 | 5.50 | | | .38 | .188 | .144 |
| -49 | -49R | 6.12 | 5.75 | | | | .192 | .148 |
| -51 | -51R | 6.38 | 6.00 | | | | .195 | .151 |
| -53 | -53R | 6.62 | 6.25 | | | | .199 | .155 |
| -55 | -55R | 6.88 | 6.50 | | | | .202 | .158 |
| -57 | -57R | 7.12 | 6.75 | | | | .205 | .161 |
| -59 | -59R | 7.38 | 7.00 | | | | .209 | .165 |
| -61 | -61R | 7.62 | 7.25 | | | | .212 | .168 |
| -66 | -66R | 8.25 | 7.62 | | | | .227 | .188 |
| -70 | -70R | 8.75 | 8.12 | 3.8 | 4.2 | .62 | .234 | .190 |
| -74 | -74R | 9.25 | 8.62 | | | | .241 | .197 |
| -78 | -78R | 9.75 | 9.12 | | | | .248 | .204 |
| MS21920-80 | MS21920-80R | 10.00 | 9.38 | | | | .251 | .207 |

APPROVED 31 AUG 54 REVISED (C) FOR CHANGES SEE SHTS 1, 2 & 3

USER SYMBOLS: DSA - CS

REVIEWER SYMBOLS: ARMY - ME

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| P.A. NAVY - AS Other Cust ARMY - ME USAF - 82 | TITLE CLAMP, HOSE (FLAT BAND, 500°F) | MILITARY STANDARD MS21920 |
|---|---|---|
| PROCUREMENT SPECIFICATION MIL-C-8783 | SUPERSEDES: | SHEET 2 OF 3 |

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

USER SYMBOLS: DSA - CS

REVIEWER SYMBOLS: ARMY - ME

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

INACTIVE FOR DESIGN

| CONVENTIONAL LATCH | QUICK-RELEASE LATCH | A INSIDE DIAMETRAL RANGE EXTENDED MIN | A INSIDE DIAMETRAL RANGE COMPRESSED MAX | B MAX (a) CONVENTIONAL TYPE | B MAX (a) QUICK-RELEASE TYPE | ADJUSTMENT RANGE REF | WEIGHT POUNDS MAX |
|---|---|---|---|---|---|---|---|
| MS21920-21 | MS21920-21R | 2.62 | 2.38 | | | | .143 |
| -23 | -23R | 2.88 | 2.62 | | | | .146 |
| -25 | -25R | 3.12 | 2.88 | | | .25 | .150 |
| -27 | -27R | 3.38 | 3.12 | | | | .153 |
| -29 | -29R | 3.62 | 3.38 | | | | .157 |
| -32 | -32R | 4.00 | 3.62 | | | | .164 |
| -34 | -34R | 4.25 | 3.88 | | | | .167 |
| -36 | -36R | 4.50 | 4.12 | | | | .171 |
| -38 | -38R | 4.75 | 4.38 | | | | .174 |
| -40 | -40R | 5.00 | 4.62 | 3.0 | 3.4 | | .178 |
| -42 | -42R | 5.25 | 4.88 | | | | .181 |
| -44 | -44R | 5.50 | 5.12 | | | .38 | .185 |
| -46 | -46R | 5.75 | 5.38 | | | | .188 |
| -48 | -48R | 6.00 | 5.62 | | | | .192 |
| -50 | -50R | 6.25 | 5.88 | | | | .195 |
| -52 | -52R | 6.50 | 6.12 | | | | .199 |
| -54 | -54R | 6.75 | 6.38 | | | | .202 |
| -56 | -56R | 7.00 | 6.62 | | | | .205 |
| -58 | -58R | 7.25 | 6.88 | | | | .209 |
| -60 | -60R | 7.50 | 7.12 | | | | .212 |
| -64 | -64R | 8.00 | 7.38 | | | | .227 |
| -68 | -68R | 8.50 | 7.88 | | | | .234 |
| -72 | -72R | 9.00 | 8.38 | 3.8 | 4.2 | .62 | .241 |
| MS21920-76 | MS21920-76R | 9.50 | 8.88 | | | | .248 |

APPROVED 31 AUG 54 REVISED (C) FOR CHANGES SEE SHTS 1, 2 & 3

| | | |
|---|---|---|
| P.A.<br>NAVY - AS.<br>Other Cust<br>ARMY - ME<br>USAF - 82 | TITLE<br>CLAMP, HOSE<br>(FLAT BAND, 500°F) | MILITARY STANDARD<br>MS21920 |
| PROCUREMENT SPECIFICATION<br>MIL-C-8783 | SUPERSEDES: | SHEET 3 OF 3 |

DD FORM 1 MAR 72 672-1 (Coordinated)

PLATE NO. 23068

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.