


FED. SUP CLASS
4730

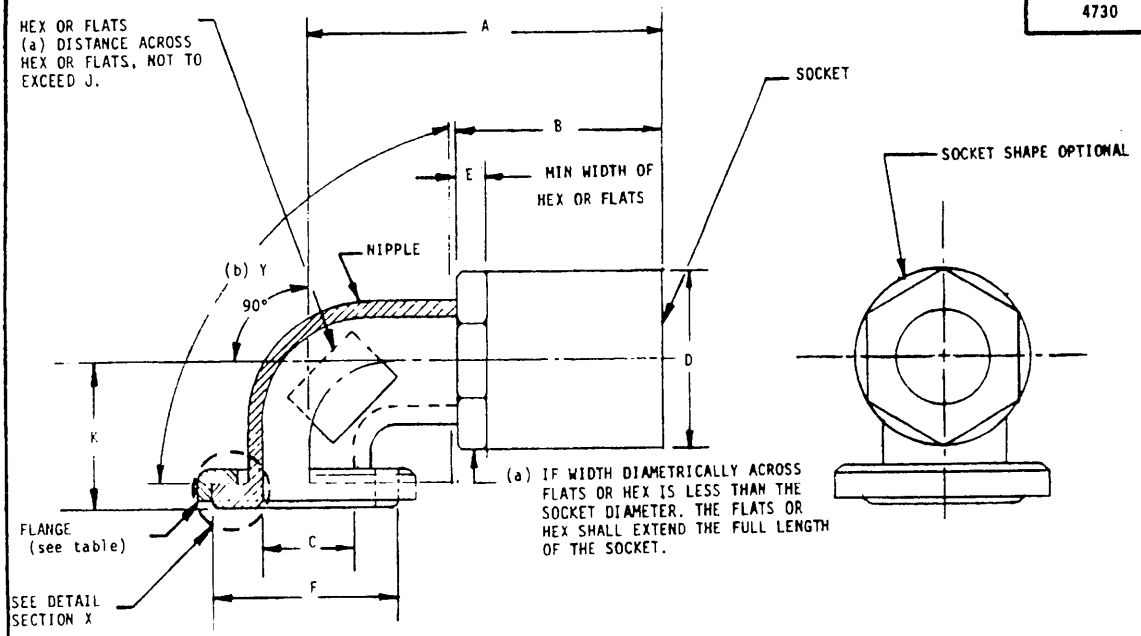



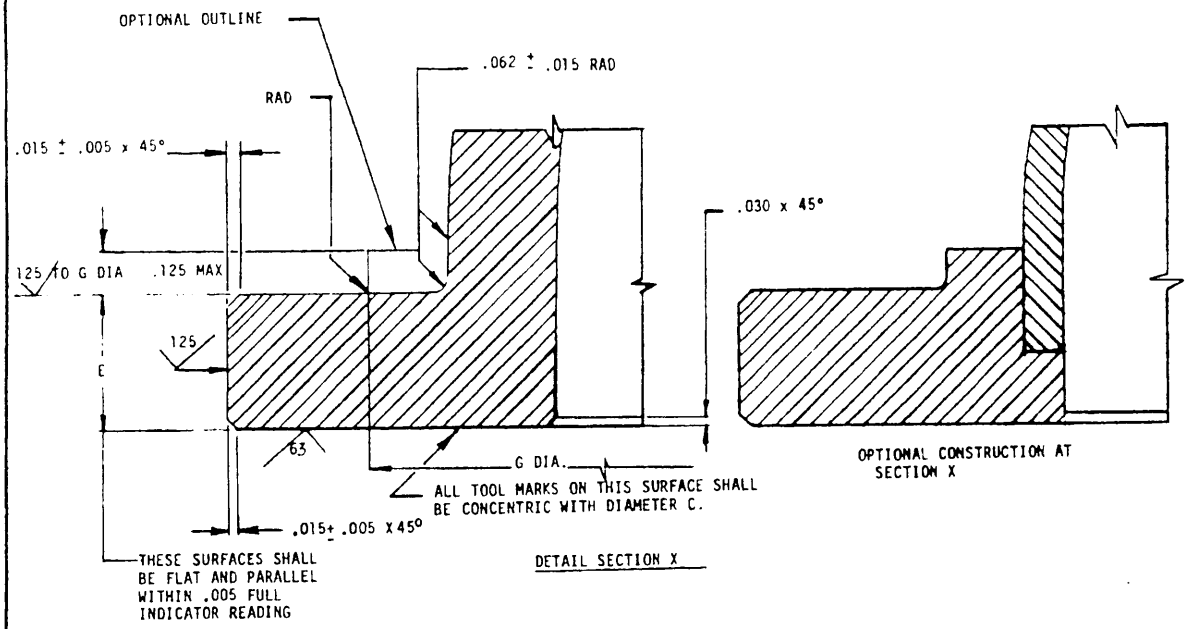

APPROVED 2 DEC 1954 REVISED A 16 APR 82 (B) 8 Aug 85

USER ACTIVITIES:

REVIEWER ACTIVITIES ARMY - AV
DLA - CS
AIR FORCE - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. AIR FORCE 82 Other Cust AIR FORCE - 99 ARMY - ME NAVY - AS	INTERNATIONAL INTEREST	TITLE FITTING END, SELF SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, 90°	MILITARY STANDARD MS 28755
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 1 OF 9

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MS PART NO.	NOMINAL TUBING AND HOSE SIZE REF	FLANGE PART NUMBER	A MAX	B MAX	(c)C MIN DIA	D MAX	E +.000 -.005	(c)F +.000 -.005	(c)G MAX DIA	H MIN	J REF	K MAX	WEIGHT LB APPROX
MS28755D16	1	MS20756D16	3.891	2.000	.813	1.953	.156	1.500	1.188	.375	1.343	1.813	.371
MS28755D20	1 1/4	MS20756D20	4.016	2.000	1.047	2.313	.156	1.844	1.500	.500	1.656	1.813	.514
MS28755D24	1 1/2	MS20756D24	4.578	2.000	1.281	2.563	.188	2.125	1.750	.500	1.906	2.313	.848
MS28755D32	2	MS20756D32	5.391	2.250	1.750	3.125	.188	2.750	2.375	.625	2.531	2.813	.947
MS28755D40	2 1/2	MS20756D40(d)	6.016	2.500	2.219	3.625	.188	3.281	2.875	1.000	3.031	3.063	1.466
MS28755D48	3	MS20756D48(d)	7.281	2.500	2.828	4.438	.188	3.781	3.375	1.250	3.250	4.313	2.000

(A) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.

(B) THE TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN ANGLE Y, HOWEVER A BALL .031 SMALLER IN DIAMETER THAN C MUST PASS THROUGH. NIPPLE ID WITHIN ANGLE Y SHALL NOT EXCEED C DIAMETER.

(C) DIAMETERS F, G AND C SHALL BE CONCENTRIC WITHIN .010 FULL INDICATOR READING.

(B) (D) HEX FLANGE MS20756 NOT SHOWN.

MATERIAL: ALUMINUM ALLOY:

(B) FOR SURFACE ROUGHNESS SEE ANSI B46.7-78.

THE INTERIOR SURFACE OF THE FITTING SHALL BE SMOOTH AND FREE FROM PROJECTIONS.
REMOVE ALL BURRS AND SHARP EDGES.
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS +.010, ANGLES $\pm 1^{\circ}$.
FITTINGS MUST SWIVEL THRU 360° WITH SUFFICIENT CLEARANCE TO ALLOW USE OF STANDARD WRENCHES ON THE NUT WHEN THE AXIS OF THE HOSE IS ALIGNED OVER THE STUD OR CAPSCREW.
THE AIRPLANE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THE DRAWING FOR INSTALLATION.
FITTING SHALL BE PERMANENTLY MARKED WITH THE MS PART NUMBER ON AN UNFINISHED SURFACE OF THE NIPPLE.

(B) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED

(B) REINSTATED 8 AUG 1985

APPROVED 2 DEC 1954 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES: ARMY - ME
DLA - CS
AIR FORCE - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. AF 82 Other Cust AF 99 ARMY ME NAVY AS	INTERNATIONAL INTEREST	TITLE FITTING END, SELF SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, 90°	MILITARY STANDARD MS 28755
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:58Z
Check the source to verify that this is the current version before use.