This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MU, Navy - EC, SH, Air Force - 11,17,99

User activities: Army - AV, Navy -, Air Force -

DD FORM 1 MAY 73 672 (Continued) previous editions of this form are obsolete.

P.A Navy-AS

Other Cust Army - EL, AF - 85

Procurement Specification MIL-C-26482

SUPERSEDES: MS3440 (NAVY)

TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, NARROW FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT CLASS H


MILITARY STANDARD

MS 3440


PAGE 1 OF 4

5935-3006-11

(B) Denotes changes

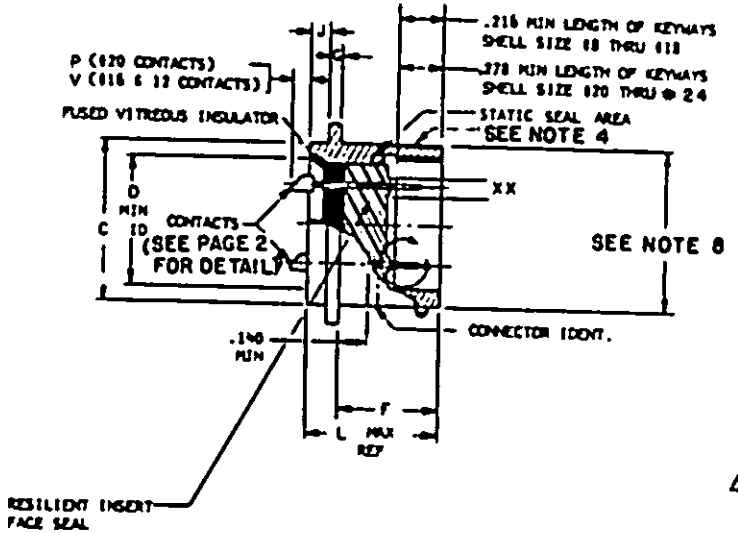

XX SEE NOTE 5 AND TABLE I FOR CONTACT CAVITIES REQUIRING REDUCED DIMENSION

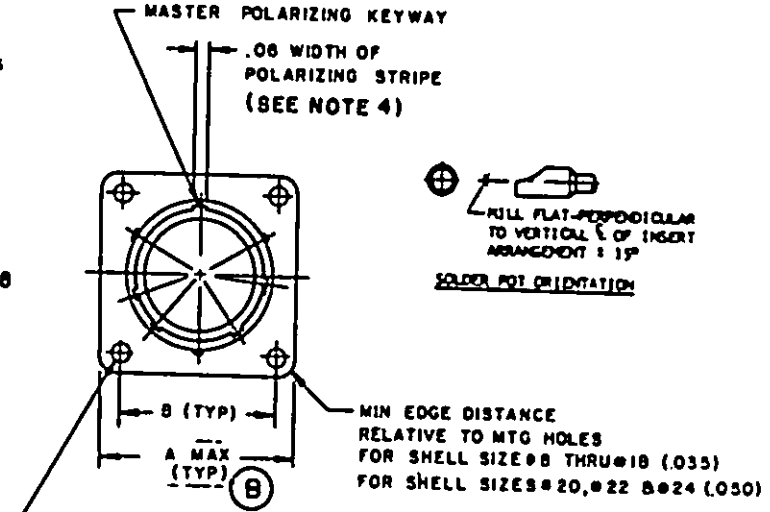

FED. SUP CLASS 5935

APPROVED 1 Apr 71 REVISED (A) 5 Sep 75 (B) 31 July 1978


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - AV
Navy -
Air Force -


Review activities: Army - MU EC, SH
Navy -
Air Force - 11,17,99

ENGAGING END OF CONTACTS

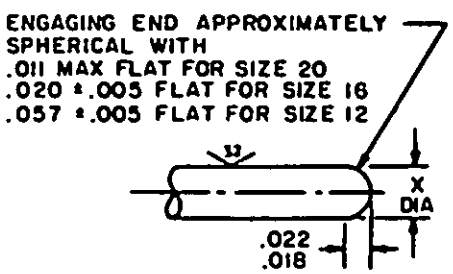


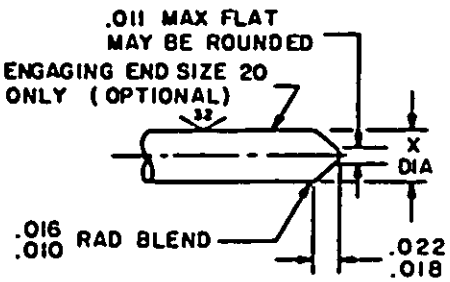

TERMINATION END OF CONTACTS

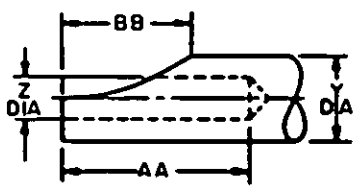

MAX PANEL THICKNESS (TYP)

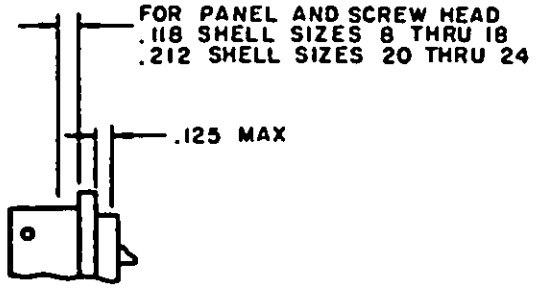

APPROVED 1 Apr 71 REVISED (B) For changes see pages 1 & 4

P.A Navy-AS Other Cust Army - EL AF - 85	International Interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, NARROW FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT CLASS H	MILITARY STANDARD MS 3440
Procurement Specification MIL-C-26482		SUPERSEDES: MS3440 (NAVY)	PAGE 2 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

TABLE I. Reduced diameter (XX).

Shell size	Insert arrangements	Contact cavities
8	-33 & -98	A, B, C.
12	-10	C, G.
14	-12	A, B, C, D, E, F, G, H.
14	-18	A, C, E, G, J, L.
14	-19	B, D, F, H, K, M.
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R.
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T.
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y.

Connector part numbering:

MS3440 H 24 C 61 P W

- MS number
- Class
- Shell size
- Termination type and shell material
- Insert arrangement
- Contact style
- Insert position

TABLE II.

Shell size	A	B	C	D	F	G	H	J	L	P	V	Panel cutout dia	Max weight (lbs)
8	.828	.594	.563/.557	.403	.598/.578	.078/.046	.120	.125/.105	.801	.178/.118	.248/.188	.570	.038
10	.954	.719	.673/.667	.515								.680	.044
12	1.047	.812	.782/.776	.630								.789	.052
14	1.141	.906	.907/.901	.755								.914	.070
16	1.234	.969	1.032/1.026	.880								1.039	.085
18	1.328	1.062	1.157/1.151	.980	.598/.578	.078/.046		.125/.105	.801			1.164	.098
20	1.453	1.156	1.251/1.245	1.105	.660/.640	.110/.078		.093/.073	.869	.178/.118	.248/.188	1.358	.110
22	1.578	1.250	1.376/1.370	1.230	.660/.640	.110/.078	.120	.125/.105	.895	.146/.086	.216/.156	1.383	.150
24	1.703	1.375	1.501/1.495	1.385	.660/.640	.110/.078	.147	.125/.105	.895	.146/.086	.216/.156	1.508	.280

User activities: Army AV, Navy, Air Force
Reviewer activities: Army MU, Navy EC, SH, Air Force 11, 17, 99
APPROVED 1 Apr 71 REVISED (A) Entire standard revised (B) For changes see pages 1 & 4

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. Navy - AS	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, NARROW FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT CLASS H	MILITARY STANDARD
Other Cust Army - EL AF - 85			MS 3440
Procurement Specification MIL-C-26482		SUPERSEDES: MS3440 (NAVY)	PAGE 3 of 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

Cont size	X	Y	Z	AA	BB
20	.041/.039	.088/.081	.048/.042	.188/.109	.110/.068
16	.0635/.0615	.116/.096	.075/.069	.251/.172	.141/.109
12	.095/.093	.150/.130	.122/.112	.251/.172	.141/.109

INCHES	MM	INCHES	MM	INCHES	MM
.0025	.064	.280	7.11	.980	24.89
.010	.25	.403	10.24	1.026	26.06
.016	.41	.515	13.08	1.032	26.21
.018	.46	.557	14.15	1.039	26.39
.022	.56	.563	14.30	1.047	26.59
.038	.97	.578	14.68	1.062	26.97
.044	1.12	.594	15.09	1.105	28.07
.046	1.17	.598	15.19	1.141	28.98
.070	1.78	.630	16.00	1.151	29.24
.073	1.85	.640	16.26	1.156	29.36
.078	1.98	.660	16.76	1.157	29.39
.085	2.16	.667	16.94	1.164	29.57
.086	2.18	.673	17.09	1.230	31.24
.093	2.36	.680	17.27	1.234	31.34
.098	2.49	.719	18.26	1.245	31.62
.105	2.67	.755	19.18	1.250	31.75
.110	2.79	.776	19.71	1.251	31.78
.118	3.00	.782	19.86	1.258	31.95
.120	3.05	.789	20.04	1.328	33.73
.125	3.18	.801	20.35	1.375	34.92
.146	3.71	.828	21.03	1.376	34.95
.147	3.73	.880	22.35	1.383	35.13
.150	3.81	.901	22.89	1.385	35.18
.156	3.96	.906	23.01	1.453	36.91
.178	4.52	.907	23.04	1.495	37.97
.188	4.78	.914	23.22	1.501	38.13
.216	5.49	.954	24.23	1.578	40.08
.248	6.30	.969	24.61	1.703	43.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Tolerances shall be .XX ±.01, .XXX ±.005, angular ±1° and X°X' ±30'.
4. Polarizing stripe, color optional.
5. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated. (See table I).
6. True position tolerances specified are in accordance with ANSI Y14.5-1973.
7. For insert arrangement see MIL-STD-1669.
8. Intermateability dimensions shall be in accordance with MIL-C-26482.
9. Shell material: Cold rolled steel per QQ-S-637.
10. (B) Shell finish: .0001 minimum tin per MIL-T-10727 over nickel per QQ-N-290.
11. The complete requirements for procuring this connector described herein shall consist of this document and the issue in effect of MIL-C-26482.
12. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
13. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 1 Apr 71 REVISED (A) Entire standard revised (B) for changes see pages 1 & 4

User activities: Army AV
Navy
Air Force

Reviewer activities: Army MU,
Navy EC, SH
Air Force 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Navy - AS	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, NARROW FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT CLASS H	MILITARY STANDARD
Other Cust Army - EL AF - 85			MS 3440
Procurement Specification MIL-C-26482		SUPERSEDES: MS3440 (NAVY)	PAGE 4 of 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.