

FED. SUP CLASS
4730

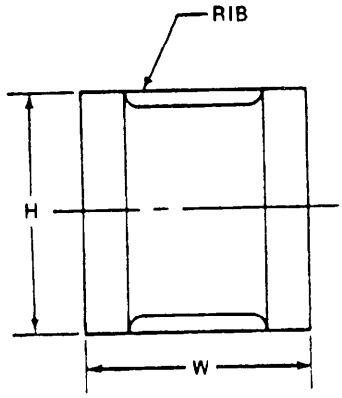

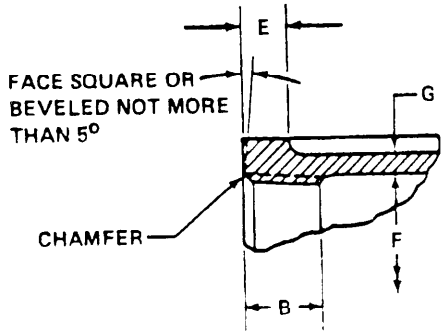

(B) Table I. Dimensions of Couplings - Class 150

Dash No.	Nominal Pipe Size	B Length of Thread Min	E Width of Band Min	F Inside Diameter of Fitting Min	F Inside Diameter of Fitting Max	G Metal Thickness (See Note 8)	H Outside Diameter of Band Min	W Length of Coupling Tol ±	W Length of Coupling
1	1/8	0.25	0.20	0.41	0.44	0.09	0.69	0.96	0.06
2	1/4	0.32	0.22	0.54	0.58	0.10	0.84	1.06	0.08
3	(C) 3/8	0.36	0.23	0.68	0.72	0.10	1.02	1.16	0.10
4	1/2	0.43	0.25	0.84	0.90	0.11	1.20	1.34	0.12
5	(C) 3/4	0.50	0.27	1.05	1.11	0.12	1.46	1.52	0.12
6	1	0.58	0.30	1.32	1.39	0.13	1.77	1.67	0.14
7	1-1/4	0.67	0.34	1.66	1.73	0.15	2.15	1.93	0.14
8	1-1/2	0.70	0.37	1.90	1.97	0.16	2.43	2.15	0.16
9	2	0.75	0.42	2.38	2.45	0.17	2.96	2.53	0.16
10	2-1/2	0.92	0.48	2.88	2.98	0.21	3.59	2.88	0.20
11	3	0.98	0.55	3.50	3.60	0.23	4.29	3.18	0.20
12	4	1.08	0.66	4.50	4.60	0.27	5.40	3.69	0.24

(B) Table II. Dimensions of Couplings - Class 300

Dash NO.	Nominal Pipe Size	B Length of Thread Min	E Width of Band Min	F Inside Diameter of Fitting Min	F Inside Diameter of Fitting Max	C Metal Thickness	H Outside Diameter of Band Min	W Length of Coupling
13	1/4	0.43	0.38	0.54	0.58	0.14	0.93	1.37
14	3/8	0.47	0.44	0.67	0.72	0.15	1.12	1.62
15	1/2	0.57	0.50	0.84	0.90	0.16	1.34	1.87
16	3/4	0.64	0.56	1.05	1.11	0.18	1.63	2.12
17	1	0.75	0.62	1.31	1.38	0.20	1.95	2.37
18	1-1/4	0.84	0.69	1.66	1.73	0.22	2.39	2.87
19	1-1/2	0.87	0.75	1.90	1.97	0.24	2.68	2.87
20	2	1.00	0.84	2.37	2.44	0.26	3.28	3.62
21	2-1/2	1.17	0.94	2.87	2.97	0.31	3.86	4.12
22	3	1.23	1.00	3.50	3.60	0.35	4.62	4.12

(B) DENOTES CHANGES

P.A	International Interest	TITLE	MILITARY STANDARD
NAVY-YD (B) Other Cust ARMY-AR AIR FORCE-99		(B) COUPLING, PIPE-STRAIGHT (150 AND 300 POUNDS)	MS39233
Procurement Specification ANSI B16-3 (B)		SUPERSEDES: CPEX1, CPEX2, CPEX2.1, CPEX5 and CPEX6	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

4730-N844

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:49Z
Check the source to verify that this is the current version before use.

User activities: Army - MC
Navy -
Air Force -

(B) Review activities: Army - ME
Navy -
Air Force - 82
DLA CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 5 APRIL 63 REVISED (A) 23 MAR 71 (B) 20 JUN 83 (C) 11 JUL 86

FED. SUP CLASS
4730

(B) NOTES:

1. MATERIAL: Material shall be in accordance with ANSI B16.3.
2. PROTECTIVE COATING: Fittings may be black finish or zinc coated in accordance with ANSI B16.3.
3. THREADS: Couplings shall be threaded with American Standard Taper Pipe Threads (NPT) in accordance with Screw-Thread Standards for Federal Services Handbook H-28.
4. DIMENSIONS: All dimensions are in inches unless otherwise specified.
5. PART NUMBER: The MS part number consists of the MS number, the dash number, and the coating identification letter.

   Examples:

   MS39233-1 represents a 1/8-inch coupling, zinc coated.
   MS39233-1B represents a 1/8-inch coupling, black finish.

6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. Metal thickness at no point shall be less than 90 percent of the thickness given in the table.

(B) DENOTES CHANGES

APPROVED 5 APRIL 63 REVISED (A) 23 MAR 71 (B) 20 JUN 83 (C) 11 JUL 86

P.A	International Interest	TITLE	MILITARY STANDARD
NAVY-YD (B) Other Cust ARMY-AR AIR FORCE-99		(B) COUPLING, PIPE-STRAIGHT (150 AND 300 POUNDS)	MS39233
Procurement Specification ANSI B16.3 (B)		SUPERSEDES: CPEX1, CPEX2, CPEX2.1, CPEX5 and CPEX6	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-N844

User activities: Army - MC
Navy - MC
Air Force -

(B) Review activities: Army - ME
Navy -
Air Force - 82
DLA CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.