
FED. SUP CLASS
2320

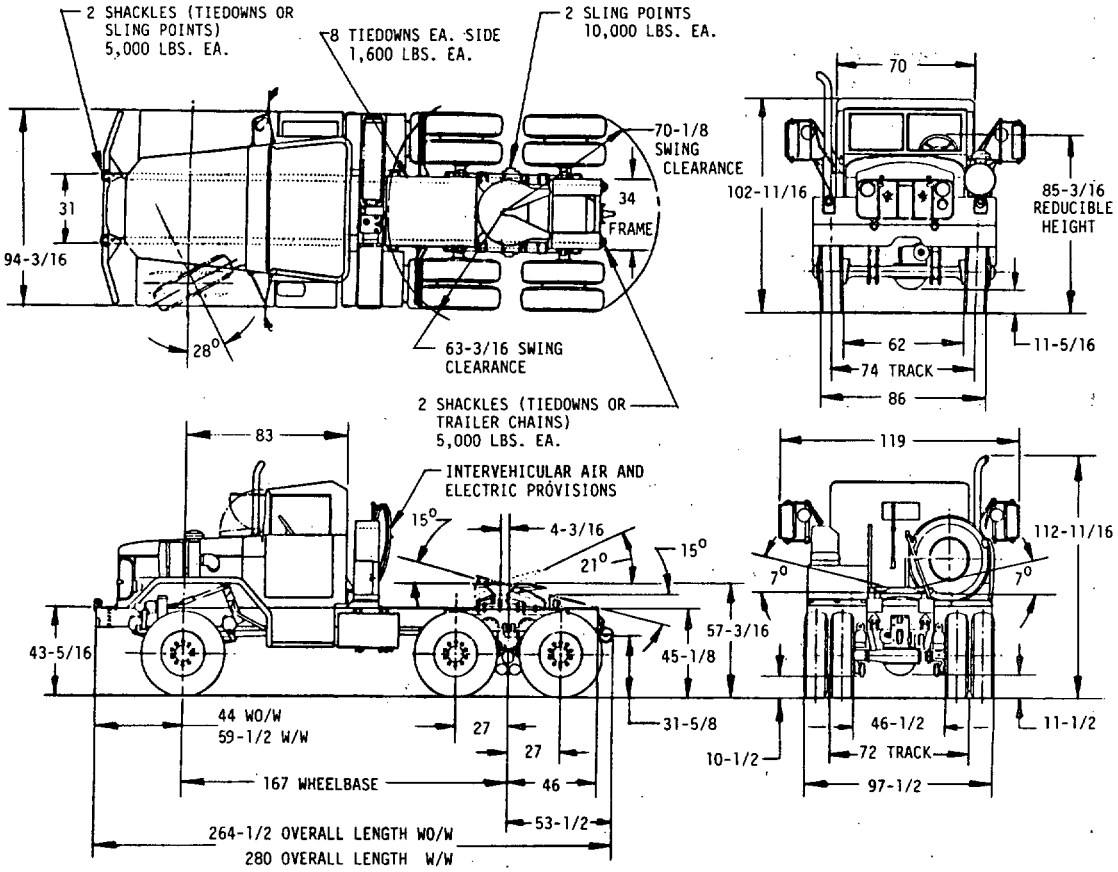

VEHICLE CHARACTERISTICS

BRIDGE CLASSIFICATION: (SHORT TONS)

	WO/W	W/W
EMPTY	10	9
WITH PAYLOAD	18	17

CURB WEIGHT: FULLY EQUIPPED LESS PAYLOAD & CREW

FRONT	9,470 LBS	10,260 LBS
REAR BOGIE	10,030 LBS	9,905 LBS
TOTAL	19,500 LBS	20,165 LBS

TRAILER LOAD: ON FIFTH WHEEL
15,000 LBS 15,000 LBS

SEMI-TRAILER WEIGHT: (W/PAYLOAD)
37,500 LBS 37,500 LBS

GROSS COMBINATION WEIGHT: FULLY EQUIPPED WITH PAYLOAD, LESS CREW

FRONT	9,845 LBS	10,635 LBS
REAR BOGIE	24,655 LBS	24,530 LBS
TRAILER BOGIE	22,500 LBS	22,500 LBS
TOTAL	57,000 LBS	57,665 LBS

(ADD 400 LBS FOR 2 MAN CREW W/EQUIPMENT)

TOWED LOAD ALLOWANCE: (PINTLE)
15,000 LBS 15,000 LBS

FUEL SYSTEM: FUEL TANK CAPACITY - 2 TANKS @ 55 GALS EA; FUEL PUMP, IN TANK; FUEL INJECTION.

CLUTCH: TYPE SINGLE DRY DISC DIA 15
EFFECTIVE AREA 70.2 SQ IN

PRESSURE PLATE	8735507
DRIVEN MEMBER	11664387

TRANSMISSION: MANUAL 8333627-1
NO OF SPEEDS - 5 FWD, 1 REV; RATIOS; 1ST - 6.07:1; 2ND - 3.40; 3RD - 1.79; 4TH - 1.00; 5TH - .78; REV. - 6.09
PTO OPENINGS 2 SAE 6 BOLT, EACH SIDE OF TRANSMISSION. LUBRICANT CAPACITY; W/PTO 11 QTS; WO PTO 9 QTS.

TRANSFER CASE: WO/PTO 7748580
NO OF SPEEDS 2 FRONT; HIGH - 1.07:1 LOW - 2.16:1, REAR; HIGH - 1.00:1, LOW - 2.02:1 CONTROL OF FRONT AXLE DRIVE, AUTOMATIC OVERRUNNING, LUBRICANT CAPACITY 7 QTS ONE PTO OPENING.

PINTLE: MS51117-1
MAX. VERTICAL LOAD (STATIC) 1,500 LBS

MS PART NO.	ENGINEERING DRAWING	DESCRIPTION
MS52190-1	8736862	WITH WINCH
MS52190-2	8736863	LESS WINCH

APPROVED 14 JUN 85 REVISED

P. A. ARMY-AT / Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		TRUCK: TRACTOR, 5-TON, 6x6, M818	MS52190(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS CONTINUED

SHIPPING DIMENSIONS:

CUBIC FEET	1,272	1,346
SQUARE FEET	179	190

HEIGHT: WITH RING MOUNT (MACHINE GUN)

WO/W	W/W
121-5/16	121-5/16

ANGLE OF APPROACH: (LOADED)
44° 33°

ANGLE OF DEPARTURE: (LOADED)
62° 62°

ANGLE OF BREAKOVER: (LOADED)
38° 38°

MINIMUM TURNING RADIUS: (WALL TO WALL)
470-7/16 488-7/16

FORDING DEPTH: WITH KIT 78 LESS KIT 30

CENTER OF GRAVITY: (AT CURB WEIGHT)
ABOVE GROUND 38 38-1/2
REAR OF CENTERLINE OF FRONT AXLE
86-3/16 82-11/16

CENTER OF GRAVITY: (WITH PAYLOAD)
ABOVE GROUND N/A N/A
REAR OF CENTERLINE OF FRONT AXLE
119-3/16 116-7/16

ENGINE: 6 CYL IN-LINE 11664325-1
COMPRESSION IGNITION FUEL INJECTION
DISPLACEMENT 855 CU IN
BORE AND STROKE 5.5 X 6
COMPRESSION RATIO 15.8:1 FUEL DIESEL
OCTANE/CETANE #40
HORSEPOWER; GROSS 240 @ 2100 RPM
NET 210 @ 2100 RPM
TORQUE GROSS; 658 LB FT @ 1500 RPM
NET 600 LB FT @ 1500 RPM
CRANK CASE CAPACITY; W/O FILTER 24 QTS
W/FILTER 28 QTS
GOVERNOR; TYPE AUTOMATIC
COOLING SYSTEM CAPACITY; 37-1/2 QTS
PUMP TYPE DRIVE 2 V BELTS
GOVERNED SPEED; 2100 RPM AT FULL LOAD

CAB: TYPE STD CANVAS; ARCTIC HARDTOP KIT; CAPACITY 2.

WINCH: CAPACITY 9,500 7412382
WIRE ROPE CABLE 0.6 IN DIA CABLE LENGTH 300 FT

STEERING: TYPE HYD W/POWER ASSIST; RATIO 23.4:1 1164535

TIEDOWNS: 16 W/W, 8 EACH SIDE 10883223
14 WO/W 7 EACH SIDE
2 FRONT LIFTING SHACKLES 12301040
2 REAR SHACKLES 7409523

ASSESSORY/SUPPLEMENTAL KITS: 12300925

BRAKES: PARKING TYPE INTERNAL/EXTERNAL
DRUM SIZE 14 DIA X 3 WIDE
EFFECTIVE AREA 68 SQ IN

AXLES: FRONT; 11664723
REAR 8758346
QTY 2, TYPE SINGLE SPEED, DOUBLE REDUCTION RATIO 6.443:1, LUBRICANT CAPACITY; 12 QTS EACH

FRAME: 11664502
TYPE RAIL CHANNEL SIDE RAIL DIMENSIONS 9 X 3 X 5/16 SECTION MODULUS 10.71 IN^3
NO. OF CROSSMEMBERS 6

FRONT SPRINGS: 7411110
3 WIDE X 50 LONG; NO OF LEAVES 12; RATE 2,271 LB/IN; TYPE SEMI-ELLIPTICAL; SHOCK ABSORBERS DIRECT ACTING, QTY 2.

REAR SPRINGS: 7409613
SIZE 4 WIDE X 59-1/4 LONG NO. OF LEAVES 13, RATE 5,983 LB/IN; TYPE SEMI-ELLIPTICAL INVERTED, QTY 2.

TIRES W/FLAP AND TUBE: MIL-T-12459
SIZE 11.00 X 20 LOAD RATING F
TREAD DESIGN NDCC NO. OF SPARES 1
TUBE ZZ-I-550

WHEELS: TYPE STEEL DISC, 7388820
SIZE 20 DIA X 7-1/2 WIDE RING 7389061
FRONT SINGLE, REAR DUAL, OFFSET 6-3/4

BRAKES: SERVICE, TYPE AIR ASSISTED HYDRAULIC, INTERNAL EXPANDING DRUM
SIZE 16-1/2 X 5-1/2, EFFECTIVE AREA
FRONT 339 SQ IN REAR 678 SQ IN
SEMI-TRAILER AIR LINES QTY 2 7954876
COUPLERS QTY 2 MS35746-1

ELECTRICAL SYSTEM: WATERPROOFED, RADIO SUPPRESSED PER MIL-STD-461.
POTENTIAL 24 V STARTING MTR 11664475
ALTERNATOR 10929868
RATING 60 AMP; DRIVE 2 V BELTS
BATTERIES; QTY 4 TYPE 12V 6TN MS35000-3
TRAILER COUPLING SOCKET 7363002
TURN SIGNAL; SOLID STATE FLASHER 11613631
CONTROL 11613632
LIGHTING; HEADLAMPS 8741462
B.O. DRIVING LAMP 8747988
COMPOSITE LAMPS; FRONT 11614156
REAR 11614157
SEMI TRAILER CONNECTING HARNESS 7728814

PERFORMANCE: APPROX. 4 MPG AT GCW MAX SPEED 52 MPH; MAXIMUM GRADE 46%; GRADEABILITY 2.4%; CRUISING RANGE 400 MILES

FIFTH WHEEL: KING PIN 2 DIA 11669413-1
APPROACH RAMPS & DECK PLATES.

ON-VEHICLE EQUIPMENT: (OVE)
BASIC ISSUE ITEMS 12300877
ADDITIONAL AUTHORIZED LIST ITEMS 12300998

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DRAWING	DESCRIPTION
MS52190-1	8736862	WITH WINCH
MS52190-2	8736863	LESS WINCH

APPROVED 14 JUN 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: TRUCK: TRACTOR, 5-TON, 6x6, M818	MILITARY STANDARD MS52190(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.