[INCH-POUND]
A-A-2881
October 25, 1996
SUPERSEDING
GGG-B-110A
September 14, 1966

COMMERCIAL ITEM DESCRIPTION

BAR, COMBINATION PRY AND SCRAPER

The General Services Administration has authorized the use of this Commercial Item Description for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers a combination or multipurpose bar.

1.2 Intended use. This multipurpose tool is used for prying, pulling, cutting, scraping, and lifting.

2. CLASSIFICATION.

2.1 Classification. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Material. The material used in the manufacturer of the combination pry and scraper bar shall be of high carbon steel. The chemical composition of the material and the heat treatment employed shall produce bars capable of meeting the requirements specified.

3.2 Design. The combination pry and scraper bar shall have a "V" type nail notch or slot in each end. The hand gripping area of the body shall have smooth, rounded edges. An eye-type nail slot shall be provided in the body of the tool and shall be located within 4 inches from the chisel end. The nail slot shall be designed to extract nails ranging in sizes 2 through 10 penny. Both ends of the bar shall have sharp edges for scraping. The head end shall be bent at approximately 90 degrees to the longitudinal axis.

3.3 Hardness. When tested in accordance with ASTM E18, the combination pry and scraper bar shall have a Rockwell hardness of 38 to 48 HRC. Hardness readings shall be taken on either end from a distance greater than 1/2 inch from the end.


3.4 Coating. The body of the combination pry and scraper bar shall be coated with lacquer or paint (e.g, enamel).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.


FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:26Z
Check the source to verify that this is the current version before use.


3.5 Illustration. Except for the technical requirements (e.g., design, dimensions), the illustration herein is descriptive and is not intended to preclude the purchase of items otherwise conforming to the requirements of this description.

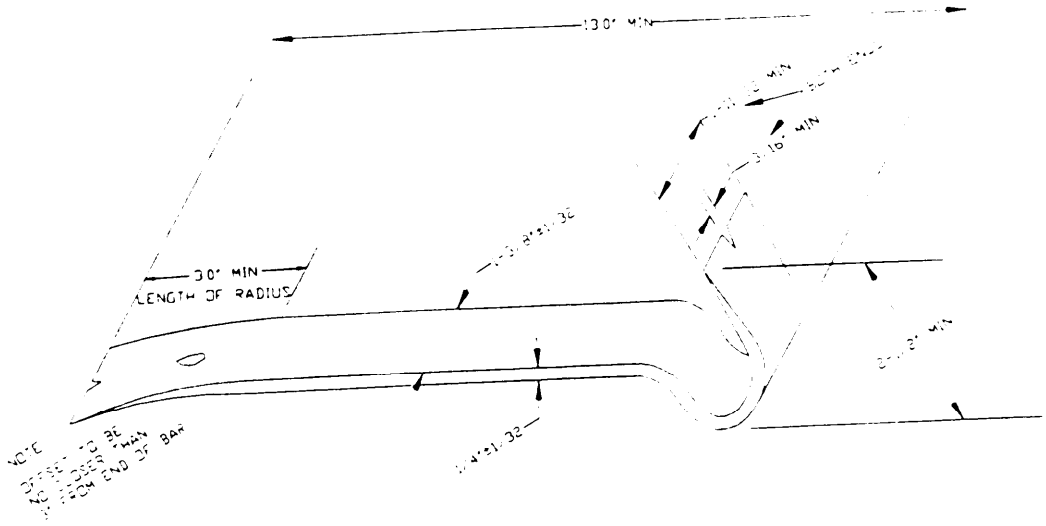

3.6 Structure strength. The combination pry and scraper bar shall not fracture or show any evidence of permanent set when the bar is positioned and secured in clamping fixtures with the specified loads applied as shown in the figures below.

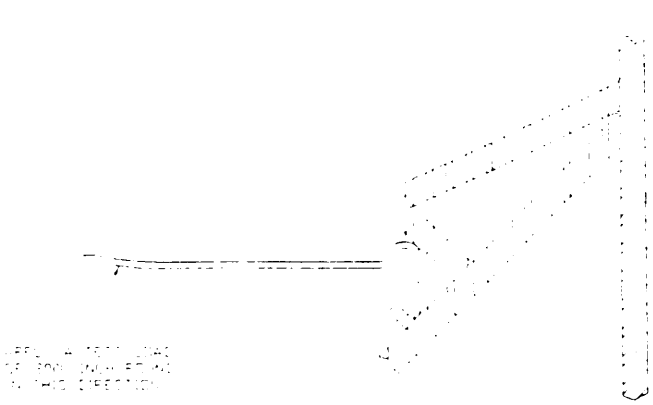

FIXTURE FOR TESTING HOOKED END

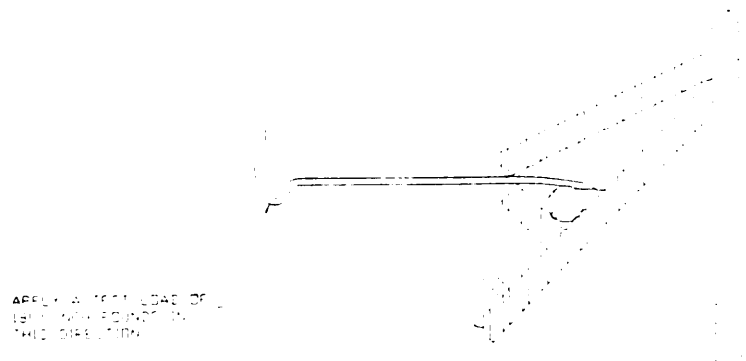

FIXTURE FOR TESTING STRAIGHT END

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:26Z
Check the source to verify that this is the current version before use.

3.7 Identification marking. The combination pry and scraper bar shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.8 Safety warning. The combination pry and scraper bar shall be marked with the following: WARNING - WEAR SAFETY GOGGLES. This marking shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.9 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, dry, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free of manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

5.3 Bid sample(s) When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements for preservation, packaging, packing, and marking of containers shall be as specified in the contract or order.

7. NOTES. (This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents.

Federal Specifications: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P. O. Box 3005, 611 East Wisconsin Ave., Milwaukee, WI 43201-4606.

ASTM: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

DoD Standardization Documents: Standardization Document Order Desk, 700 Robbins Ave., Building 4d, Philadelphia, PA 19111-5094.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN.
(c) If bid samples are required and the number of samples required.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspection is required and the applicable lot sampling requirements.

For example:

Sampling for inspection and testing. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:26Z
Check the source to verify that this is the currentversion before use.

Examinations. Each sample bar shall be examined for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level (AQL) of 4.0. expressed in terms of defects per hundred units.

Testing. Each sample bar shall be tested for all salient characteristics. The Inspection Level shall be S-3, with an Acceptable Quality Level (AQL) of 1.5, expressed in terms of defects per hundred units.

(f) What preservation, packaging, and marking are required.

7.3 National Stock Numbers (NSNs). The following NSN is associated with this Commercial Item Description (CID). This list may not be indicative of all possible NSNs associated with this CID:

NSN 5120-00-965-0879

7.4 Deleted item. The following pry bar that appeared in GGG-B-110A has been deleted in this CID since there are no user requirements for the item.

Type II - Smooth ends.

Military Coordinating Activity:

Army - GL

Preparing Activity:

GSA - FSS

Custodians:

Army - GL
Navy - SH
Air Force - 99

Review Activity:

Air Force - 84

(DoD Project 5120-0075)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.