[INCH-POUND]
A-A-2954
October 3, 1995
SUPERSEDING
H-B-1049
August 21, 1974

COMMERCIAL ITEM DESCRIPTION

BRUSH, BOTTLE, BURETTE, FLASK, PIPET, AND TEST TUBE

The General Services Administration has authorized the use of this commercial item description, for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers brushes intended for use in cleaning laboratory glassware such as bottles, burettes, flasks, pipets, and test tubes.

2. CLASSIFICATION

2.1 Classification. Brushes shall be of the following types, styles, classes, sizes, and models, as specified (see 7.1).

Type I - Test tube
Type II - Pipet
Type III - Bottle and Burette
Type IV - Flask

Style A - Dome tip
Style B - Tuft tip
Style C - Conical tip
Style D - Single fan tip
Style E - Open end

Class 1 - Hog bristle
Class 2 - Synthetic filament

Sizes (in inches) - 1/4 (6.4 mm), 1/2 (12.7 mm), 3/4 (19.0 mm) 1 (25.4 mm), 1-1/4 (31.8 mm), 1-1/2 (38.1 mm) 2 (50.8 mm), 2-1/4 (57.2 mm), 3 (76.2 mm)

Model W - Wooden handle
Model TW - Twisted wire handle

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Material.

3.1.1 Bristle, Class 1. The bristle shall be natural color, stiff, resilient hog bristles of uniform length, and shall be cleaned and sterilized. The bristles shall be trimmed so as to show no tendency to separate at the ends.

3.1.2 Synthetic filament, Class 2. The filament shall be made of synthetic polymeric amide. The filament shall be black or white in color, as specified in the contract or purchase order.

3.1.3 Wire. Wire shall be brass, zinc-coated steel or corrosion-resistant steel.

3.1.4 Wood. Wood for the handles shall be close-grained and straight-grained hardwood, such as birch, beach, maple, or ash.

3.2 Construction.

3.2.1 Style A - dome tip. The distal end of the brush part shall have a dome composed of several fan shaped wings of applicable filler, neatly and securely bound into the twisted wire.

3.2.2 Style B - tuft tip. The distal end of the brush part shall have a tuft composed of the applicable filler neatly and securely bound into the twisted wire.

3.2.3 Style C - conical tip. The brush head shall taper from the handle and toward the distal end and shall have a single fan shaped wing of applicable filler neatly and securely bound into the twisted wire.

3.2.4 Style D - single fan tip. The distal end of the brush part shall have a single fan shaped wing of applicable filler, neatly and securely bound into the twisted wire.

3.2.5 Style E - open end. The brush head shall be located equidistant from the ends. The handle end of the twisted wire shall have a loop and the other end of the wire shall be tightly twisted to a rounded, smooth end.

3.2.6 Ferrule. The metal ferrule shall be corrosion-resistant, approximately 5/8 inch (15.8 mm) wide, and clamped around the handle where the strip is inserted into the wooden handle.

3.3 Workmanship. The brushes shall function smoothly for the purpose intended. Handles shall be free of cracks or chips. No defects that affect appearance, function or serviceability shall be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3.4 Metric Products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

3.5 Standard commercial product. The brushes shall, as a minimum, be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product. A standard commercial product is a product which has been sold or is currently offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures, and represents the latest production model.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES


7.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. The type, style, class, size, and model of brush required.
c. The preservation, packing, and marking desired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

7.3 Part numbering. Material conforming with this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the specification number, type, style, class, size and model. An example of the part number configuration is shown below. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

EXAMPLE:

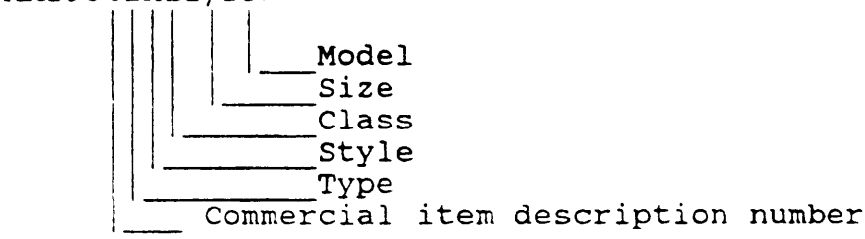

7.4 National stock numbers (NSNs). The following is a list of NSNs assigned which correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

NSN	Type	Style	Class	Size	Model
7920-00-494-3688	IV	D	2	3	W
7920-00-205-0445	III	D	1	2-1/4	W
7920-00-285-9100	III	B	1	1	TW
7920-00-292-4368	III	B	1	2	TW
7920-00-409-2000	I	B	1	3/4	TW
7920-00-409-4500	I	D	(1 OR 2)	1/2	TW
7920-00-223-7982	I	B	1	1-1/2	TW
7920-00-240-6359	II	C	1	1/4	TW
7920-00-282-7783	I	A	(1 OR 2)	1/2	TW
7920-00-282-7784	I	A	1	3/4	TW
7920-00-297-1510	I	A	1	1-1/2	TW
7920-00-409-5550	I	B	1	1-1/4	TW
7920-00-753-5183	I	E	1	1/2	TW
7920-00-889-3381	I	A	1	1-1/4	TW

MILITARY INTEREST:

NONE: DoD has determined that no military activity has an official interest in this commercial item description.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.