MIL-F-16377/4A(SH)
29 July 1981
SUPERSEDING
MIL-F-16377/4(SHIPS)
30 November 1970

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING, FLUORESCENT, DETAIL LIGHTING FOR SECRETARY BUREAU

8 WATTS, 120 VOLTS, 60 HERTZ, SYMBOL 142.2

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

(A) The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

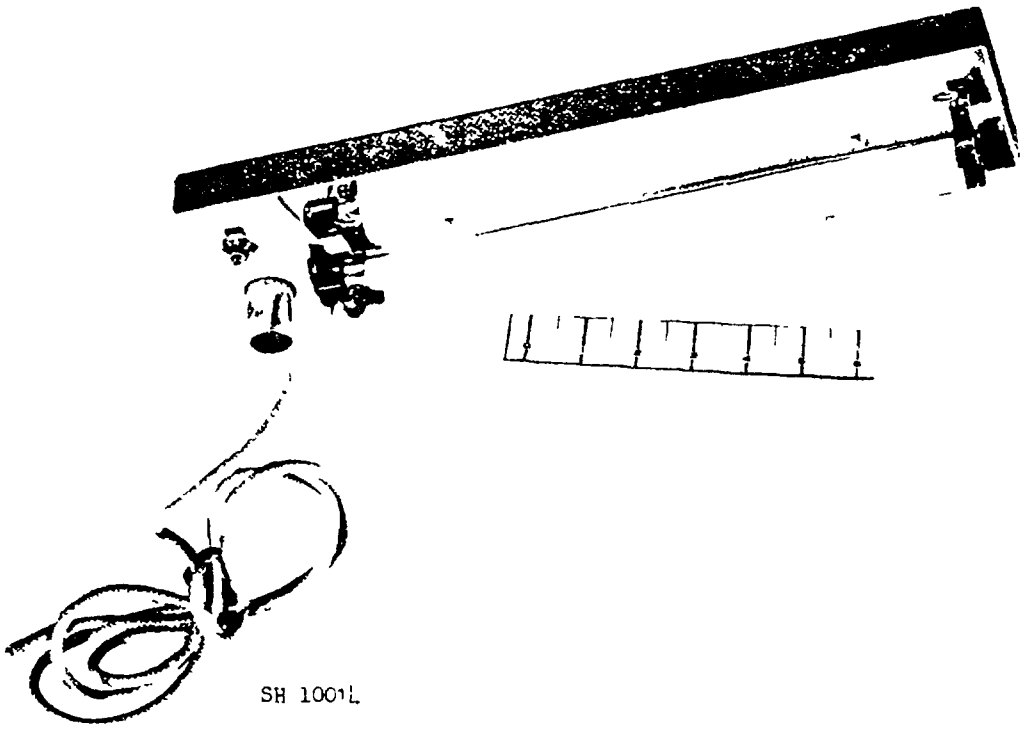


FIGURE 1. Typical view of Symbol 142.2.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

(A) Denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

(A)

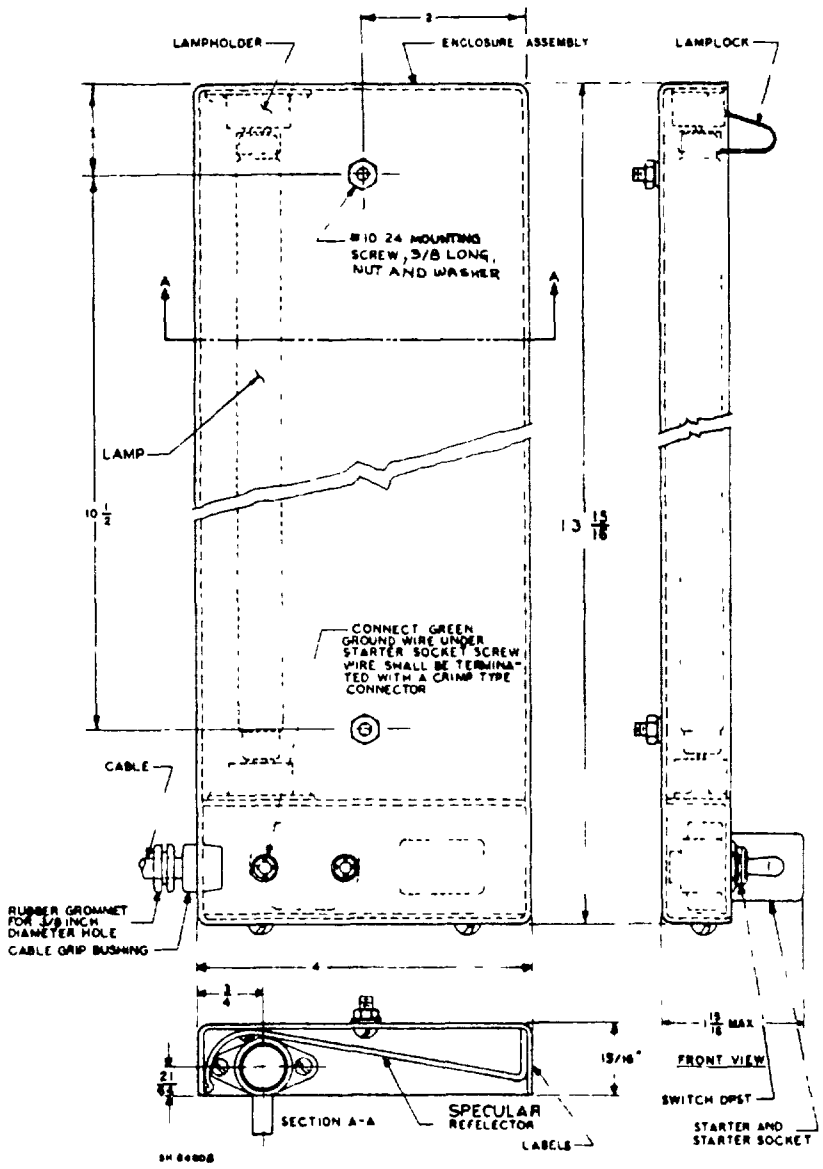


FIGURE 2. Light, fluorescent, detail lighting for Secretary Bureau, Symbol 142.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

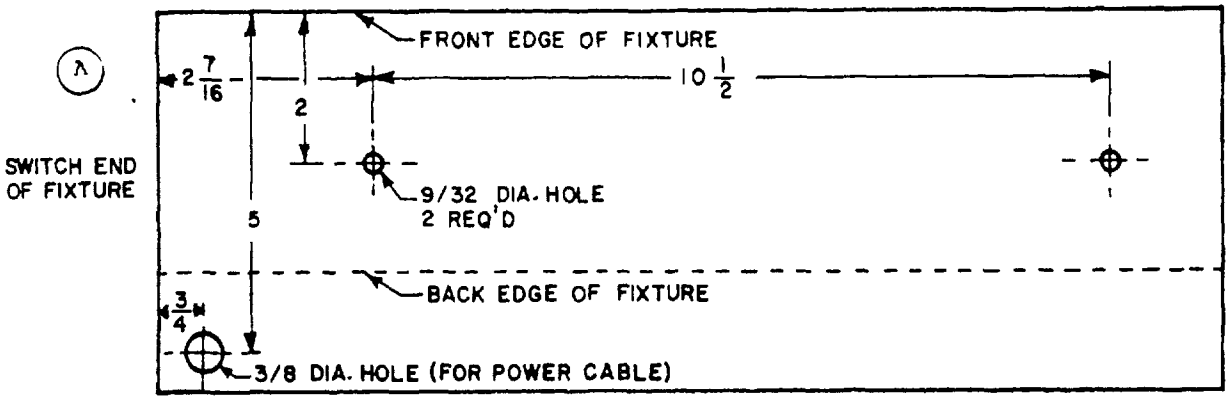


FIGURE 3. Template for mounting.


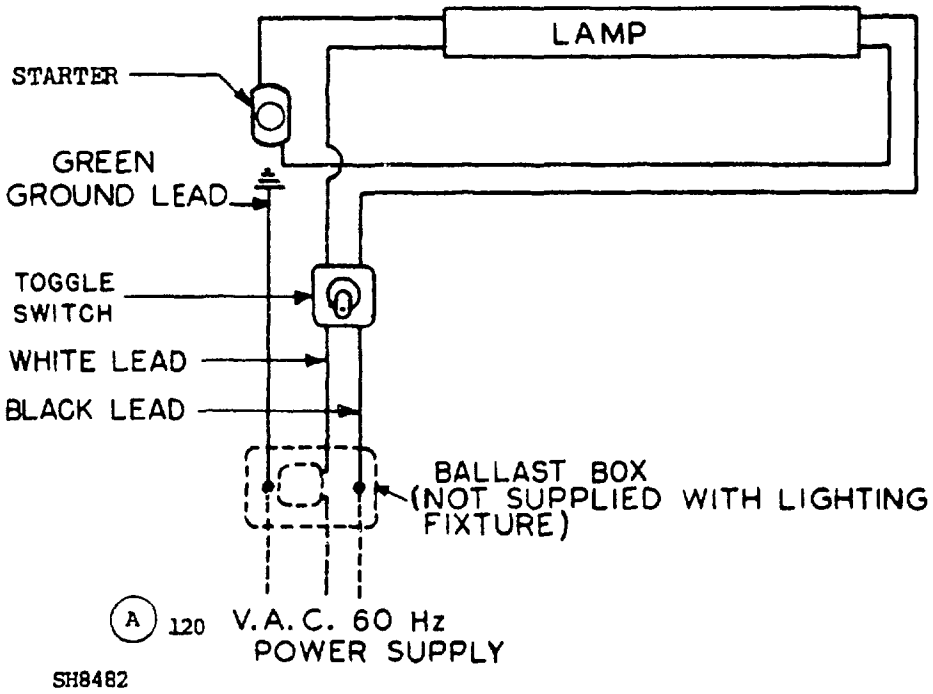


FIGURE 4. Wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

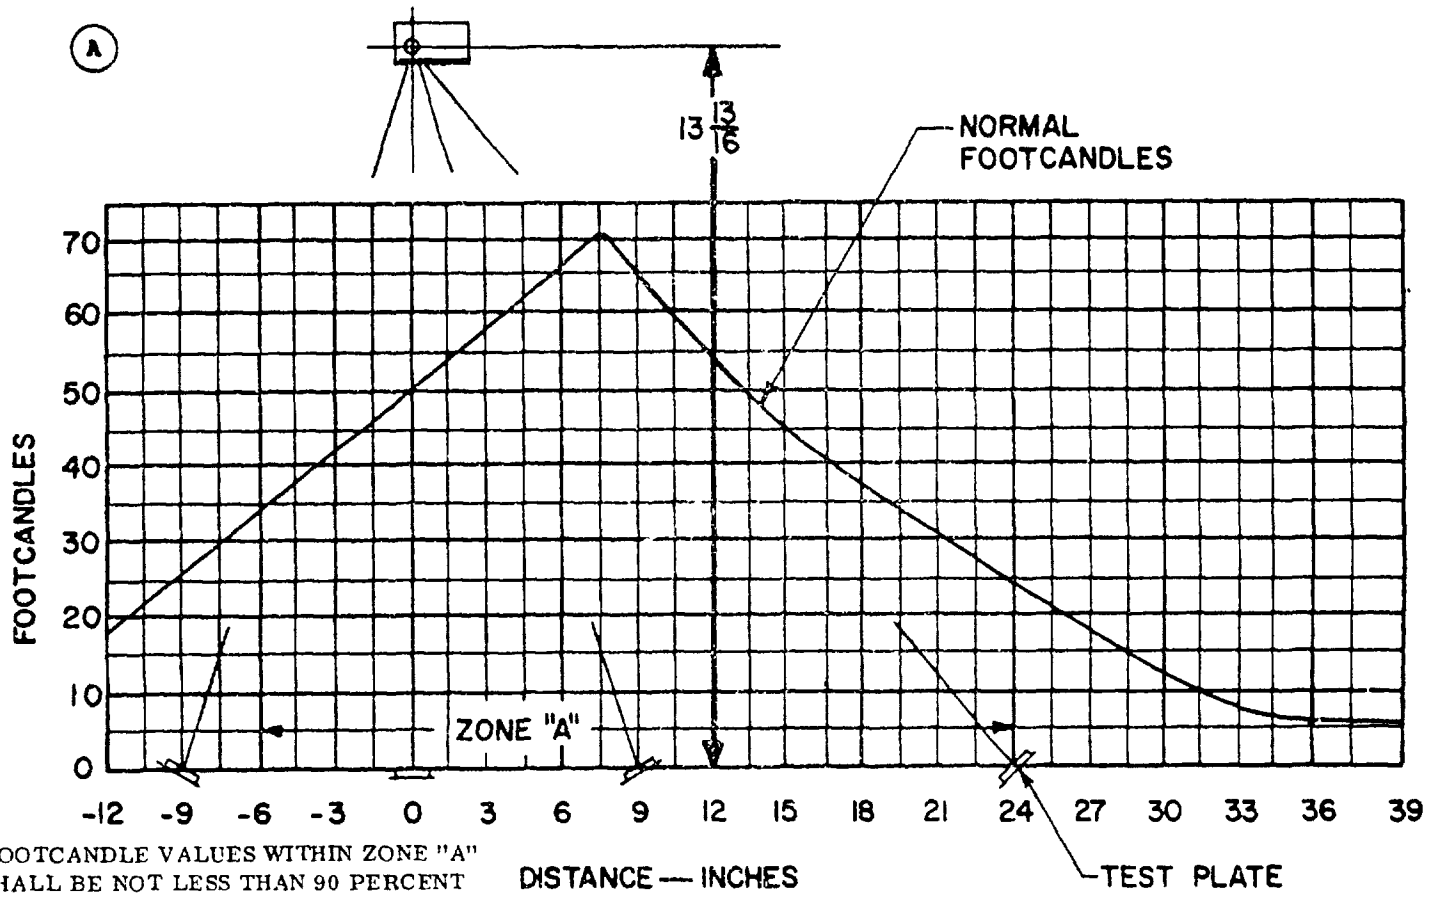

FOOTCANDLE VALUES WITHIN ZONE "A" SHALL BE NOT LESS THAN 90 PERCENT OF THE VALUES SHOWN HEREON. THESE RESULTS SHALL BE MET AFTER CORRECTION TO 380 LUMENS OUTPUT FOR BOTH LAMP AND BALLAST HAS BEEN MADE.

Photometric test data:
Distance: 13 13/16 inches.
Voltage· 115 volts, 60 Hz.
Ambient temperature: 76°F.
Lamp furnished with fixture shall be used.
Ballast, Symbol 514 shown on MIL-F-16377/46 shall be used.

SH8767

FIGURE 5. Footcandle distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: I
Class: 1

SYMBOL NUMBER:
142.2: Light for Secretary Bureau, with one 8-watt cool white lamp.

(A) DESIGN.
Electrical rating: 8 watts, 120 volts, 60 Hertz.
Dimensions and configuration: See figures 1 and 2.
Template for mounting: See figure 3.
Cable: 10 feet, SVT construction in accordance with J-C-580 except with light gray thermoplastic sheath and AWG size 18, three conductor.
Wiring diagram: See figure 4.
Reflector: Specular, aluminum prefinished lighting sheet.
Instruction sheet: An instruction sheet containing the following information shall be packaged with each fixture.

"THIS FIXTURE IS DESIGNED FOR USE WITH A SEPARATELY MOUNTED 8-WATT BALLAST BOX SHOWN ON MIL-F-16377/46, SYMBOL 514. THE BALLAST BOX IS NOT FURNISHED WITH THE FIXTURE AND MUST BE ORDERED SEPARATELY. FOR INSTALLATION INSTRUCTIONS SEE NAVSEA 0964-LP-000-200 COVERING 'LIGHTING OF NAVAL SHIPS'."

Enclosure: Aluminum 0.050 min. thickness.
Weight: 1 pound, 8 ounces, max.
Designation and marking: The following labels shall be furnished in accordance with MIL-F-16377 applied as shown in figure 2.

(a) One type I.
(b) One type IV. The information to be shown on the type IV label shall be "USE LAMP NSN 6240-00-299-5546 ONLY."

Standard Parts: The standard parts shown in table I shall be used in the construction of the fixture specified herein.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection See table II.
Quality conformance:
Comparison inspection Same as the first article inspection.
Inspection of product for delivery.
Examination: See MIL-F-16377.
Examination for preparation of delivery: See MIL-F-16377.
Quality conformance tests: See MIL-F-16377.

GENERAL INFORMATION:

Assignment of Military part numbers and general information is as follows:

Military part number M16377/4-142.2
National Stock Number: 6230-00-548-0385
Supersession data: Formerly covered on NAVSHIPS Drawing 9000-S6401-73808 and MS17195.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Name	Specification or Military part number	National Stock Number (NSN)	Remarks
Lamp	W-L-116/3	6240-00-299-5546	Industry Number F8T5/CW
Lamplock	M16377/40-001	6250-00-399-7039	
Lampholder	MIL-L-970/10	6250-00-377-8590	
Startersocket	MIL-L-970/13	6250-00-295-2738	
(A) Starter	8W, type III of W-S-755	6250-00-299-5962	Commercial Designation: FS 5
Toggle switch, DPST	MS16569-1	5930-00-719-9659	

TABLE II. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4 5	
Operation	3.13	4 8 1	1/
Dielectric withstanding voltage	3.6.15	4.8 2	
Insulation resistance	3 6 16	4.8.3	
Vibration	3.5.13	4 8 8	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3 6.16	4 8.3	
Noise	3.5.14	4.8.9	1/
Grounding circuit	3.6.13 3	4.8.11	
Light output	3.7.1	4 8 6.2	Footcandle
Magnetic permeability	3.4.8	4.8.18	

1/ Light shall be connected to ballast box shown on MIL-F-16377/46, symbol 514

Preparing activity
Navy - SH
(Project 6210-N552)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:39Z
Check the source to verify that this is the current version before use.