INCH-POUND

MIL-F-16377/9A(SH)
AMENDMENT 1
2 August 1996

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; FLUORESCENT, GENERAL LIGHTING 24 WATTS, 120 VOLTS, 60 HERTZ, WATERTIGHT, SYMBOLS 73.3, 73.4, 346.2 AND 346.3

This amendment forms a part of MIL-F-16377/9A(SH), dated 29 July 1981, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.


Pages 3/3a and 3b/4.

Preparing activity:
Navy - SH
(Project 6210-N661-05)

AMSC N/A FSC 6210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:40Z
Check the source to verify that this is the current version before use.

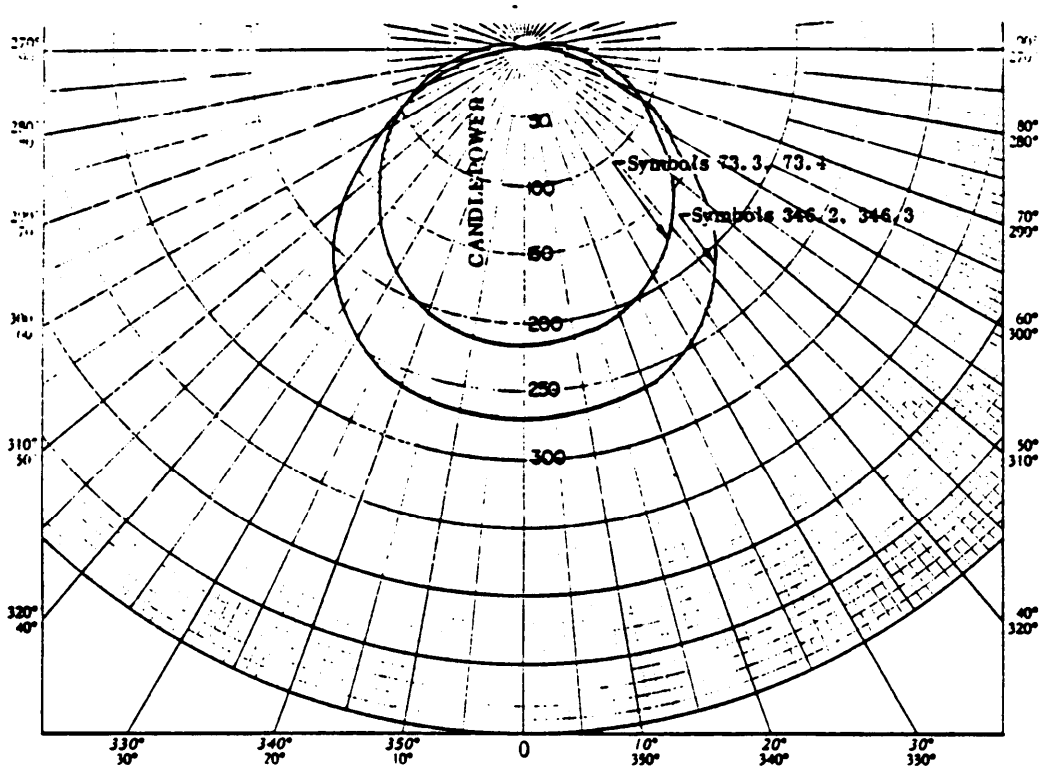

ANGLE	CANDLEPOWER SYMBOL NUMBER	
	73.3, 73.4	346.2, 346.3
0	212	265
5	212	265
10	210	265
15	208	260
20	202	260
25	195	251
30	190	242
35	180	232
40	165	218
45	155	200
50	138	175
55	122	147
60	112	125

ANGLE	CANDLEPOWER SYMBOL NUMBER	
	73.3, 73.4	346.2, 346.3
65	95	97
70	95	75
75	70	57
80	55	40
85	45	30
90	32	20
95	22	15
100	15	10
105	10	11
110	5	6
115	5	0
120	5	0
125	0	0

SH8609

Photometric test data:

Distance: 10 feet.
Plane: At right angles to long axis of fixture through geometric center of lamp.
Voltage: 115 volts, 60 Hz.
Ambient temperature: 76°F.
Lamps: Use lamps furnished with fixtures seasoned for at least 100 hours.
Ballast: Use ballast furnished with fixture.
Lamp correction: Distribution curves based on 380 lumens per lamp.

FIGURE 4. Candle power distribution curves.

REPRINTED WITHOUT CHANGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:40Z
Check the source to verify that this is the current version before use.

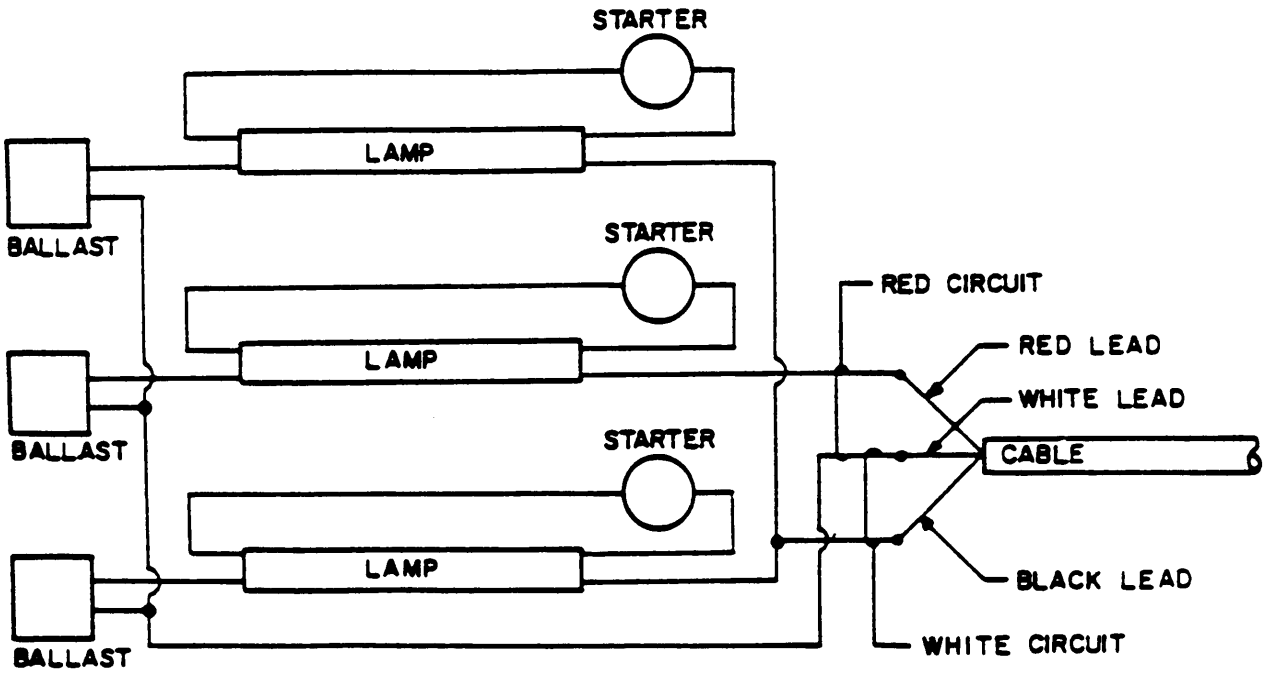


FIGURE 5. Wiring diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:40Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

NEW PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: I
Class: 2

SYMBOL NUMBERS:
73.3: Complete lighting fixture assembly, standard mounting, with three 8-watt cool white fluorescent lamps and white diffusing window assembly.
73.4: Complete lighting fixture assembly, flush mounting with three 8-watt cool white fluorescent lamps and white diffusing window assembly.
346.2: Complete lighting fixture assembly, standard mounting with three 8-watt cool white fluorescent lamps and clear and white prismatic window assembly.
346.3: Complete lighting fixture assembly, flush mounting, with three 8-watt cool white fluorescent lamps and clear and white prismatic window assembly.

DESIGN:
Electrical rating: 24 watts, 120 volts, 60 Hertz.
Dimension and configurations: See figures 1, 2, and 3 and figure 10 of MIL-F-16377.
Photometric data: See figure 4.
Lampholder spacing: See figure 21 of MIL-F-16377.
Wiring diagram: See figure 24 of MIL-F-16377.
Mounting dimensions:
Symbols 73.3 and 346.2: See figure 25 of MIL-F-16377.
Symbols 73.4 and 346.3: See figure 26 of MIL-F-16377.
Window assembly:
Symbols 73.3 and 73.4: Military part number M16377/9-001, figure 27 of MIL F-16377.
Symbols 346.2 and 346.3: Military part number M16377/9-003, figure 27 of MIL F-16377.
Enclosure: Watertight. See 3.5.11 of MIL-F-16377.
Cable: 10 feet of type LSTHOF-3, in accordance with MIL-C-24643/3.
Weight:
Symbols 73.3 and 346.2: 7 lbs 7 oz. maximum.
Symbols 73.4 and 346.3: 8 lbs 11 oz. maximum.
Designation and marking: The following labels shall be furnished in accordance with MIL-F-16377 applied as shown on figures 1 and 3:
(a) Two type I.
(b) One type II for Symbols 73.4 and 346.3 only.
(c) One type IV. The information to be shown on the type IV label shall be "USE THE FOLLOWING REPAIR PARTS ONLY."
List all standard parts shown in table I and window assemblies of table IV by name and stock number only.
Standard parts: The standard parts shown in table I shall be used in the construction of the fixtures specified herein.

TABLE I. Standard parts.

Name	Specification or Military part number	National stock number (NSN)	Remarks
Lamp	W-L-116/3	6240-00-299-5546	Industry number F8T5/CW
Lock lamp	M16377/40-001	6250-00-399-7039	
Lampholder	UL-542	6250-00-377-8590	Supplement SA, Figure SA2.1
Startersocket	UL-542	6250-00-295-2738	Supplement SA, Figure SA2.4
Starter	8W, type III of W-S-755	6250-00-299-5962	Commercial designation: FS5
Ballast	M16377/45-001	6250-00-295-2735	
Shockmount	M16377/41-009 or M16377/41-010	6210-00-973-1747 6210-00-973-1748	See 3.5.16 of MIL-F-16377
Red filter tube	M16377/42-001	6210-00-399-6297	Not furnished See 3.7.7 of MIL-F-16377

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:40Z
Check the source to verify that this is the current version before use.