MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; FLUORESCENT, DETAIL LIGHTING FOR MIRRORS

15 WATTS, 120 VOLTS, 60 HERTZ, SYMBOLS 337 AND 340

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SHIPS).


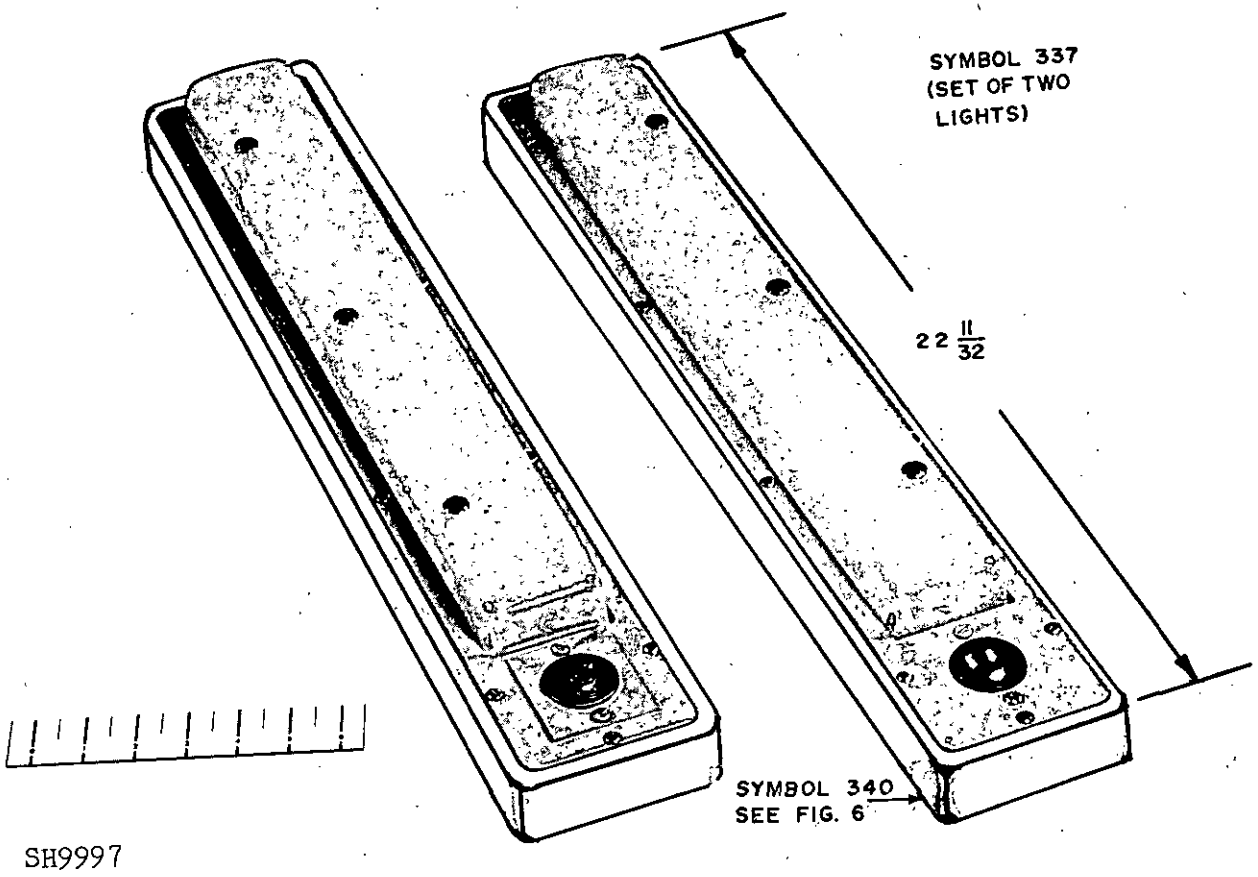


FIGURE 1. Typical view of Symbols 337 and 340.

All dimensions in inches.
For toleracnes other than specified herein, see paragraph 3.5.2 of MIL-F-16377.


FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:43Z
Check the source to verify that this is the current version before use.

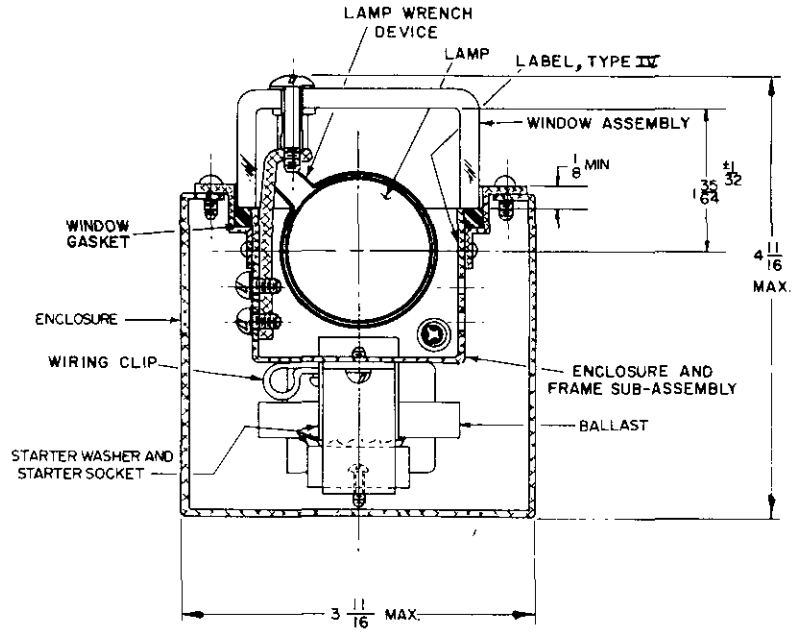

SH 8706A


FIGURE 2. Typical section for left hand light of Symbol 337.

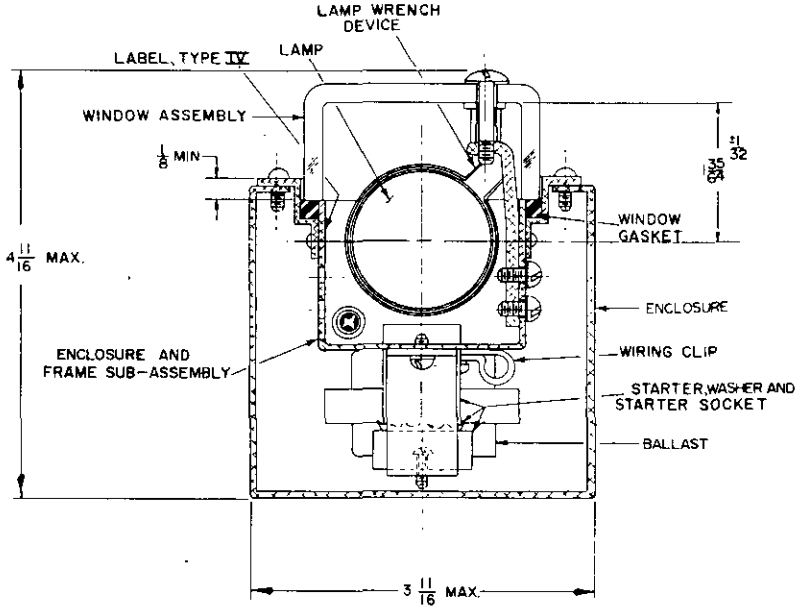


SH 8707A

FIGURE 3. Typical section for Symbol 340 and right hand light of Symbol 337.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:43Z
Check the source to verify that this is the current version before use.

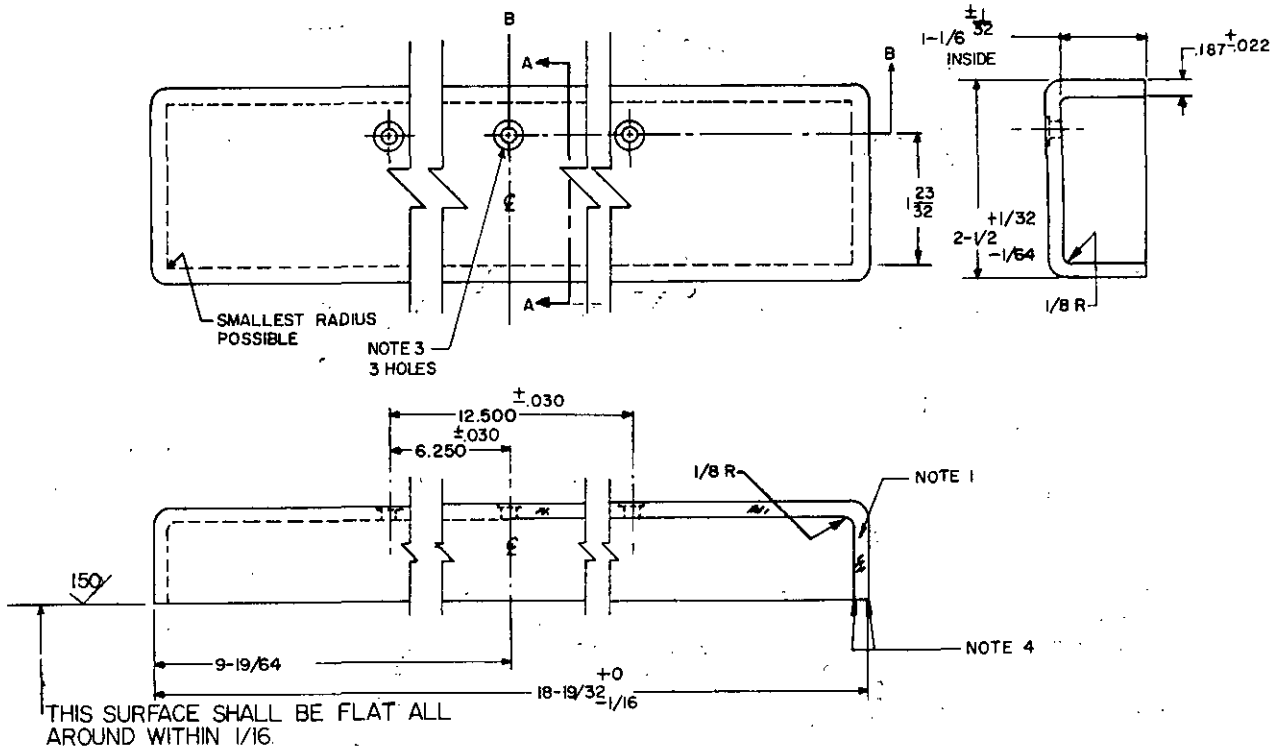

WINDOW DETAILS

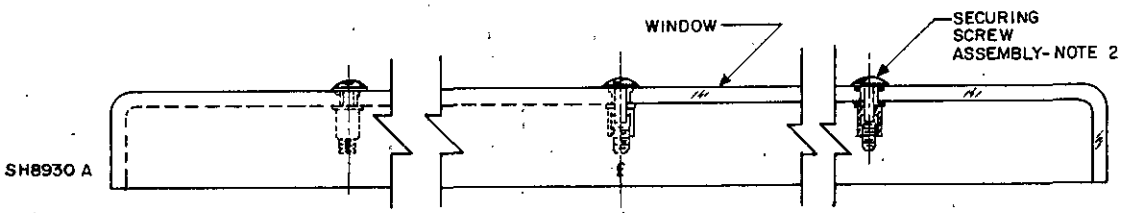

WINDOW ASSEMBLY

NOTES:

1. Material shall be 3/16 inch thick, white translucent acrylic plastic, Type WTLS-3, Grade C of MIL-P-24191.
2. Three short window securing screw assemblies shall be installed in accordance with 3.7.4.3.
3. Drill 0.191 diameter hole and counterbore 0.323 diameter, 0.050 deep. Break sharp edges on the inside surface of all holes.
4. Break sharp edges 1/64 of an inch around entire window.

FIGURE 4. Window assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:43Z
Check the source to verify that this is the current version before use.

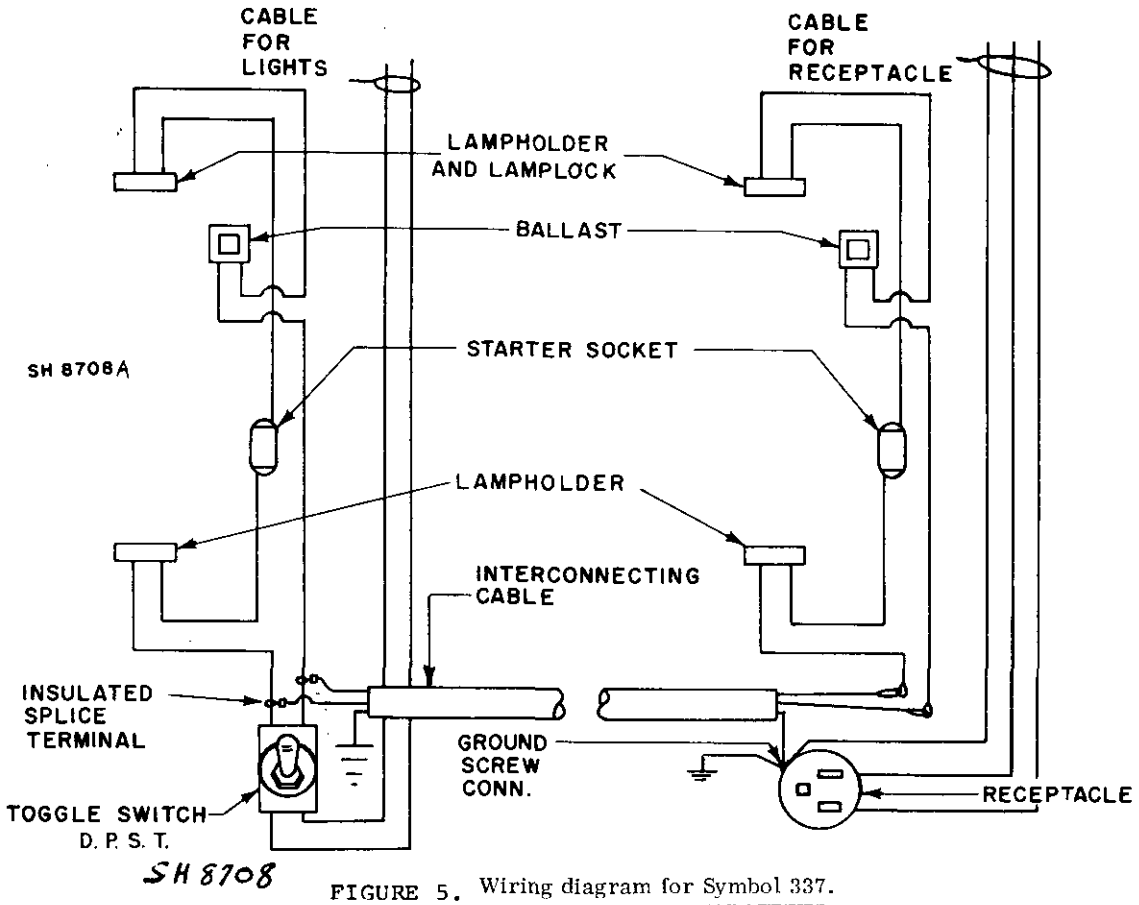


FIGURE 5. Wiring diagram for Symbol 337.


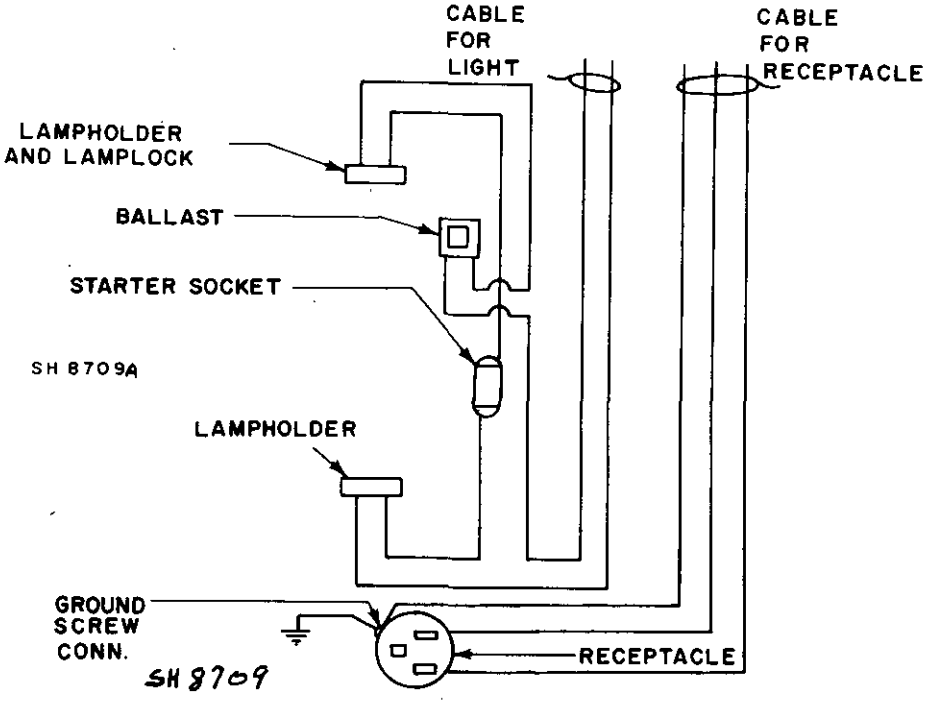


FIGURE 6. Wiring diagram for Symbol 340.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:43Z
Check the source to verify that this is the current version before use.

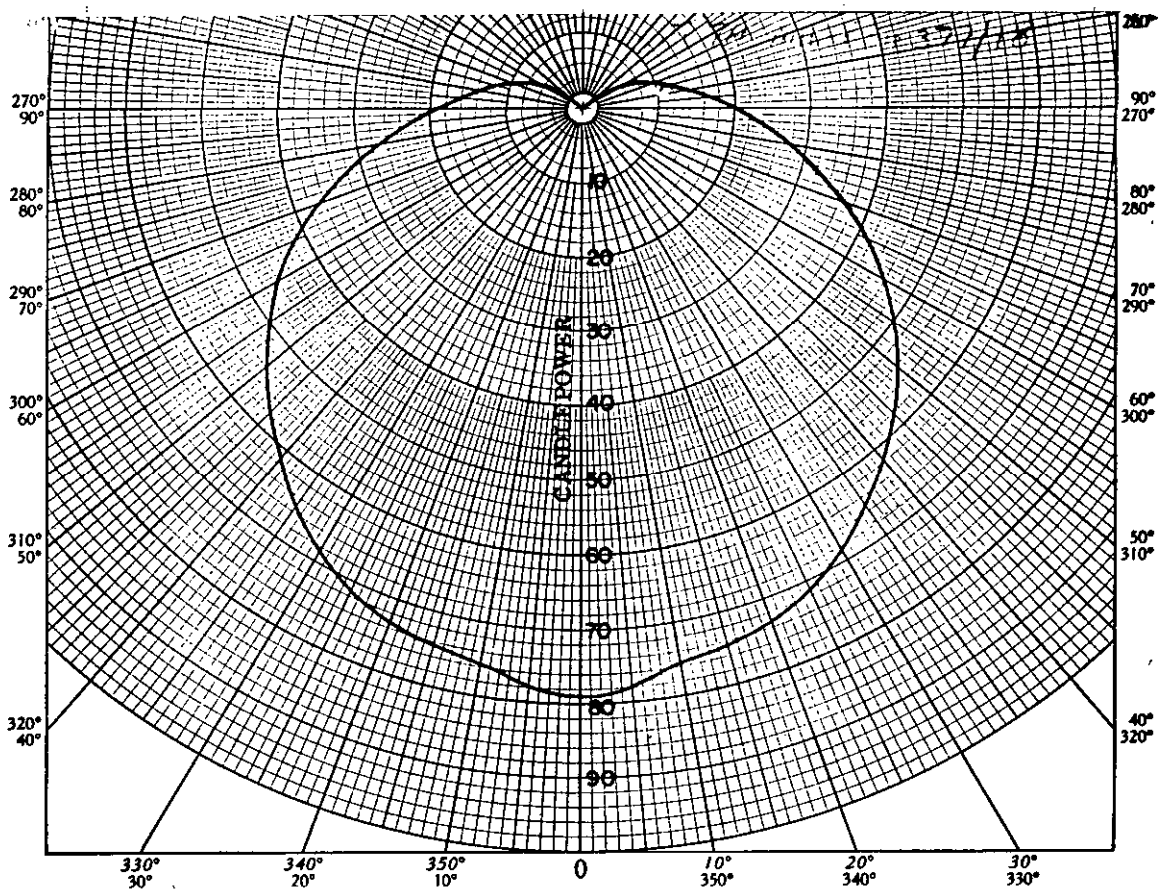

SH 8710

ANGLE	SYMBOL NUMBER 337
0	78
5	77
10	75
15	74
20	73
25	71
30	68
35	65
40	62
45	58
50	55
55	50
60	47

ANGLE	SYMBOL NUMBER 337
65	42
70	38
75	31
80	28
85	23
90	20
95	17
100	14
105	12
110	10
115	8
120	7
125	5

Photometric test data:

Distance: 10 feet.
Plane: At right angles to long axis of fixture through geometric center of lamp.
Voltage: 115 volts, 60 Hz.
Ambient temperature: 76°F.
Lamps: Use lamps furnished with fixtures seasoned for at least 100 hours.
Ballast: Use ballast furnished with fixture.
Lamp Correction: Distribution curve based on 790 lumens per lamp.

FIGURE 7. Candlepower distribution curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: I
Class: 1

SYMBOL NUMBERS:
337: Set of two lights for toilet case mirrors consisting of the following:
(a) One right hand light with grounded receptacle and one 15-watt cool white lamp.
(b) One left hand light with DPST toggle switch and one 15-watt cool white lamp.
The toggle switch shall control both lamps in the set.
340: One light for wash room mirrors with grounded receptacle and one 15-watt cool white lamp.

DESIGN:
Electrical rating: 15 watts, 120 volts, 60 Hertz.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Typical section for left hand light of Symbol 337: See figure 2.
Typical section of Symbol 340 and right hand light of Symbol 337: See figure 3.
Enclosure: Aluminum. See figures 1, 2 and 3.
Window assembly: See figure 4. Material shall be 3/16 inch thick, white translucent, heat resistant, cast acrylic plastic sheet conforming to type WTLS-3, grade C of MIL-P-24191. Three short securing screw assemblies in accordance with MIL-F-16377 shall be provided.
Cable, type SJO or SJT **construction in accordance with J-C-580, as follows:**
(a) Symbol 337 (see figure 5).
(1) Left hand light: 10 feet of external cable two conductor **and three feet of interconnecting cable, three conductor, size No. 16 AWG.**
(2) Right hand light: 10 feet of external cable, size No. 16 AWG, three conductor.
(b) Symbol 340 (see figure 6).
(1) *External light cable: 10 feet of size No. 16 AWG, two conductor.*
(2) External receptacle cable: 10 feet of size No. 16 AWG, three conductor.

Wiring diagram for Symbol 337: See figure 5.
Wiring diagram for Symbol 340: See figure 6.
Grounding: The ground connnection of the isolated receptacle shall be secured under the head of a screw attaching the box to the toilet cases or bulkhead, as applicable.
Lamp wrench device: The manufacturer shall provide a device to permit ready insertion and removal of lamp.
Weight:
Symbol 337: 12 lbs. 2 oz maximum
Symbol 340: 6 lbs. 9 oz. maximum
Designation and **marking:** The following labels shall be furnished in accordance with MIL-F-16377 applied as shown in figures 2 and 3:

(a) One type I.
(b) One type IV. The information to be shown on the type IV label shall be "USE LAMP NSN 6240-00-152-2982 ONLY."

Standard Parts: The standard parts shown in table I shall be used in the construction of the fixtures specified herein.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	
Complete fixtures:	See table II
Window assemblies:	See table III
Quality conformance:	
Comparison inspection:	Same as the first article inspection.
Inspection of product for delivery:	
Examination:	See MIL-F-16377
Examination for preparation of delivery:	See MIL-F-16377
Quality conformance tests:	See MIL-F-16377

GENERAL INFORMATION:

Assignment of Military part numbers and general information is shown in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:43Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Name	Specification or Military part Number	National Stock Number (NSN)	Remarks
Lamp	W-L-116/13	6240-00-583-3668	Industry/Number F15T12/CW
Lamp lock	M16377/40-002	6250-00-399-7040	
Lampholder	MIL-L-970/11	6250-00-284-0481	
Startersocket	MIL-L-970/13	6250-00-295-2738	
Starter	8W, Type III of W-S-755	6250-00-299-2884	Commercial Designation: FS 2
Ballast	M16377/44-001	6250-00-569-9502	
Switch, toggle, DPST	MS16569-1	5930-00-719-9659	For Symbol 337
Receptacle	W-C-596/11		

TABLE II. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Noise	3.5.14	4.8.9	
Grounding circuit	3.6.13.3	4.8.11	
Optical uniformity	3.7.4.1.1	4.8.4	
Stress relief	3.8.5.3	4.8.5	
Light output	3.7.1	4.8.6.1	Candlepower
Magnetic permeability	3.4.8	4.8.18	

TABLE III. First article and comparison inspection for window assemblies.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Optical uniformity	3.7.4.1.1	4.8.4	
Stress relief	3.8.5.3	4.8.5	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Light output	3.7.1	4.8.6.1	Candlepower

TABLE IV. Part number and general information.

Military Part number M16377/18-	Item name	National Stock Number (NSN)	Remarks
337	Complete fixture, Symbol 337	6210-00-023-1653	1/
340	Complete fixture, Symbol 340	6210-00-990-5556	1/
001	Window assembly		2/

1/ Formerly covered NAVSHIPS drawing 815-1197139.
2/ Formerly covered by MS16891, Piece 79.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 6210-N563)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:43Z
Check the source to verify that this is the current version before use.