MIL-F-16377/22A(SH)
11 April 1983
SUPERSEDING
MIL-F-16377/22(SHIPS)
30 November 1970

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, GENERAL LIGHTING

200 WATTS, 115 VOLTS, DRIPPROOF 15 DEGREES, SYMBOL 94.1

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH)

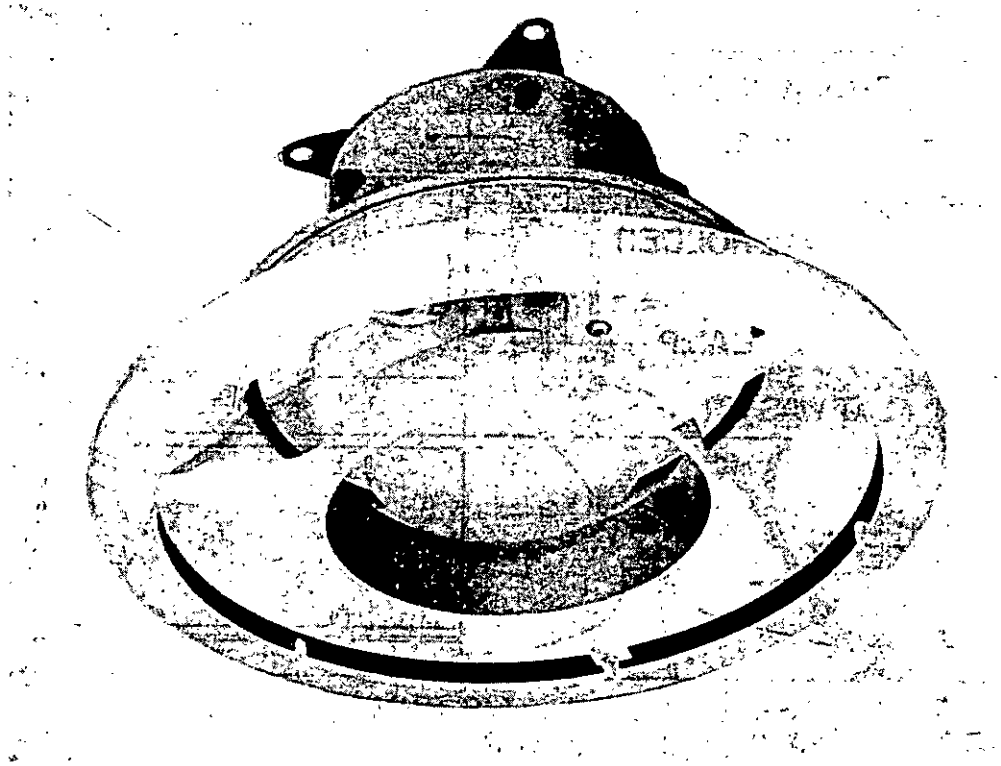


FIGURE 1. Fixture, incandescent, Symbol 94.1.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:44Z
Check the source to verify that this is the current version before use.

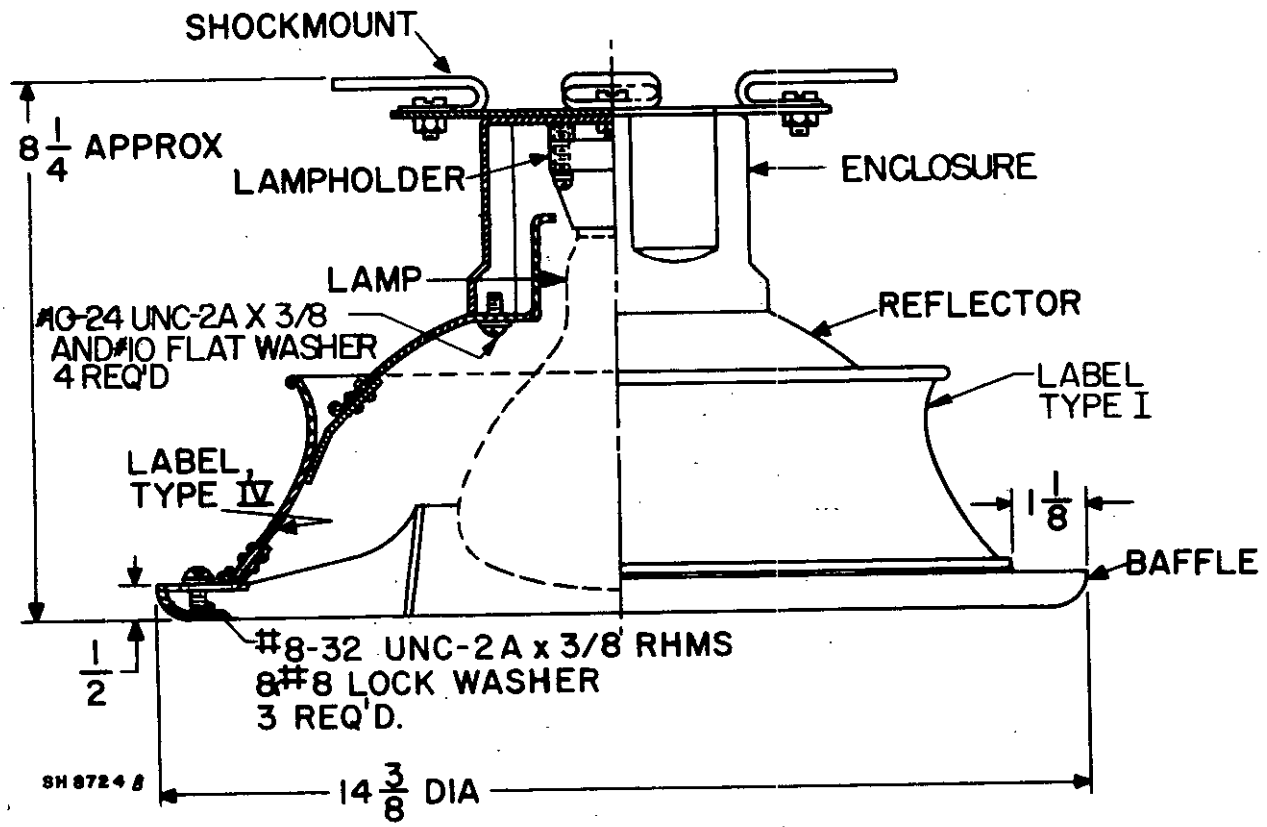


FIGURE 2. Fixture assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:44Z
Check the source to verify that this is the current version before use.


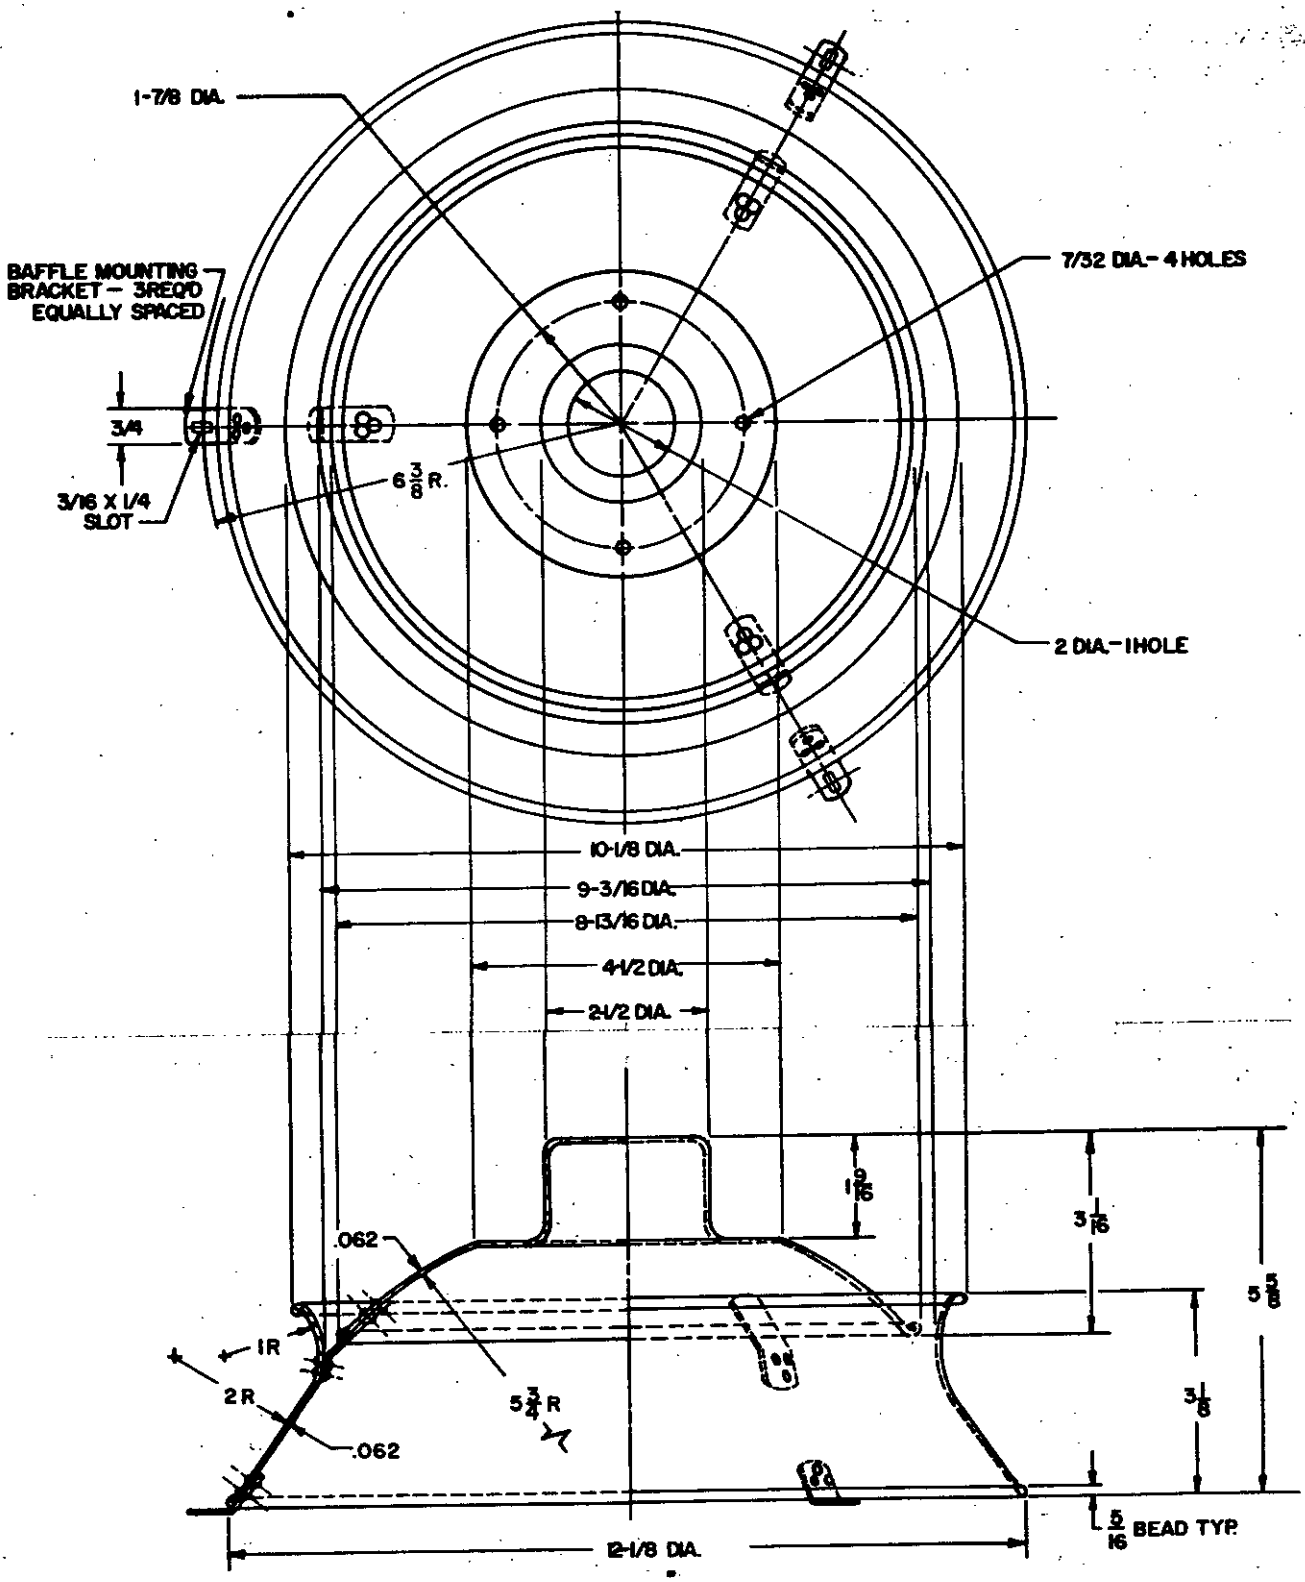


FIGURE 3. Reflector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:44Z
Check the source to verify that this is the current version before use.

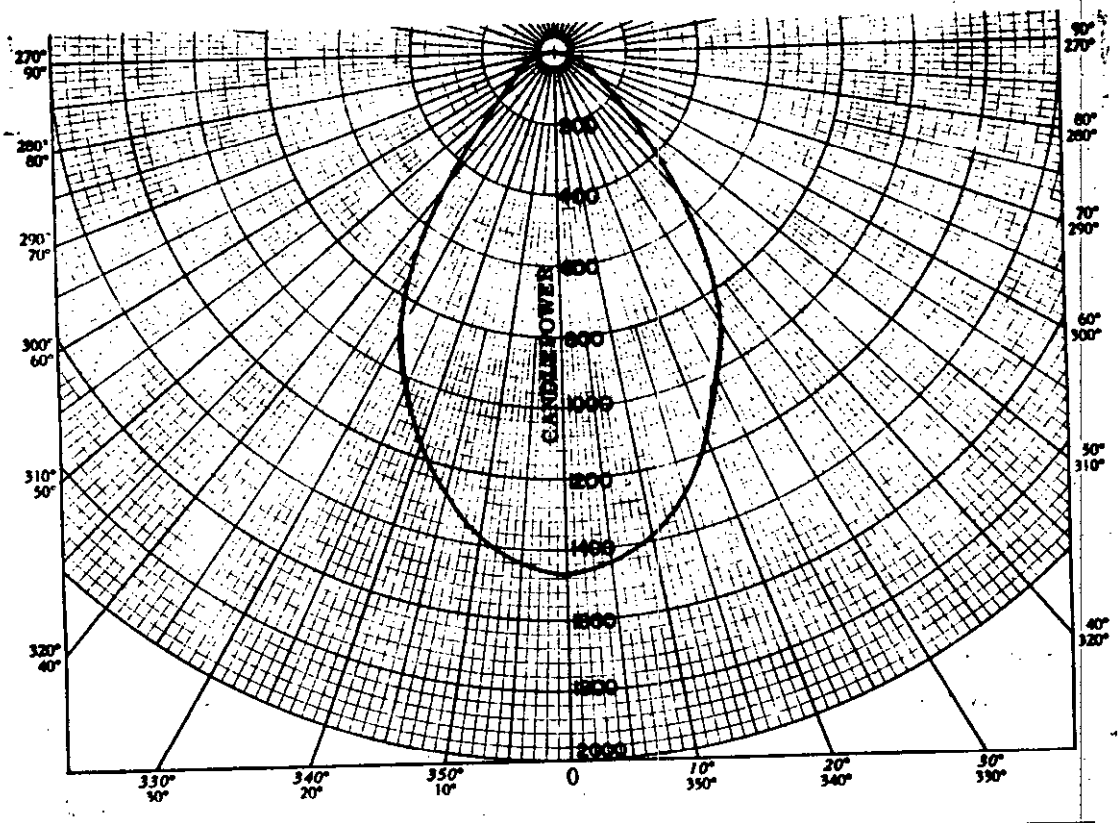

ANGLE	CANDLEPOWER SYMBOL 94.1
0	1476
5	1427
10	1360
15	1251
20	1150
25	1035
30	880
35	733
40	520
45	389
50	225
55	160
60	120

ANGLE	CANDLEPOWER SYMBOL 94.1
65	88
70	70
75	44
80	35
85	17
90	0
95	
100	
105	
110	
115	
120	
125	

Photometric test data:

Distance: 10 feet.
Voltage: 115 volts.
Ambient temperature: 76°F.
Lamp: 200 watts, rough service conforming to MS15543-4, furnished by laboratory for test, shall be used.

FIGURE 4. Candlepower distribution curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: II
Class: 2

SYMBOL NUMBERS:
94.1: Complete lighting fixture assembly with reflector and baffle assembly.

DESIGN:
Electrical rating: 200 watts, 115 volts.
Dimension and configurations: See figures 1 through 3.
Photometric data: See figure 4.
Enclosure: Enclosure shall be in accordance with MIL-F-16377/21, figure 5.
Baffle: Baffle shall be in accordance with MIL-F-16377/21, figure 7.
Reflector assembly: Material for reflector assembly shall be aluminum.
Lampholder: MIL-L-970/6, two contact.
Mounting dimensions: See figure 28 of MIL-F-16377.
Shockmounts: MIL-F-16377/41, Part Number M16377/41-005.
Enclosure: Dripproof (lampholder cavity only).
Finish: All surfaces, except shockmounts, shall receive a baked white enamel finish.
Weight: 4 pounds, 10 ounces maximum.
Lamp: This fixture shall be designed to accommodate a 200-watt, 115 volt, R-40, inside frosted, medium screw base, rough service lamp conforming to MS15543-4, Industry number 200R/RS/115V. (Lamp not furnished).
Designation and marking: The following labels shall be furnished in accordance with MIL-F-16377 applied as shown in figure 2.

(a) One type I.
(b) One type IV. Apply one type IV label as shown on figure 2 with the following information in 3/16 inch letters: "USE LAMP - NSN6240-00-267-2779 ONLY."

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	
Complete fixtures	See Table I
Repair parts	Examination only (paragraph 3.13 and 4.5)
Quality conformance:	
Comparison inspection:	Same as the first article inspection
Inspection of product for delivery:	
Examination:	See MIL-F-16377
Examination for preparation of delivery:	See MIL-F-16377
Quality conformance tests:	See MIL-F-16377

GENERAL INFORMATION:

Assignment of Military part numbers and general information is shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:44Z
Check the source to verify that this is the current version before use.

TABLE I. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.31	4.5	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14.2	Dripproof
Continuity of grounding	3.6.13.4	4.8.12	
Light output	3.7.1	4.8.6.1	Candlepower
Magnetic permeability	3.4.8	4.8.18	

TABLE II. Part numbers and general information.

Military Part No. 1/ M16377/22	Item Name	National Stock Number (NSN)	Remarks
94.1	Complete fixture, Symbol 94.1	6210-00-548-0381	figure 2
001	Reflector/baffle assembly	6210-00-548-0038	2/

1/ Formerly covered on NAVSHIPS Drawing 9000-6401-73997 and Military Standard MS18030.

2/ Consist of the baffle assembled on the reflector with hardware as shown on figure 2.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity
Navy - SH
(Project 6210-N562)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:44Z
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1983—