NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-19207/24G
23 August 1991
SUPERSEDING
MIL-F-19207/24F
30 December 1980

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING, TYPE FHL35W

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

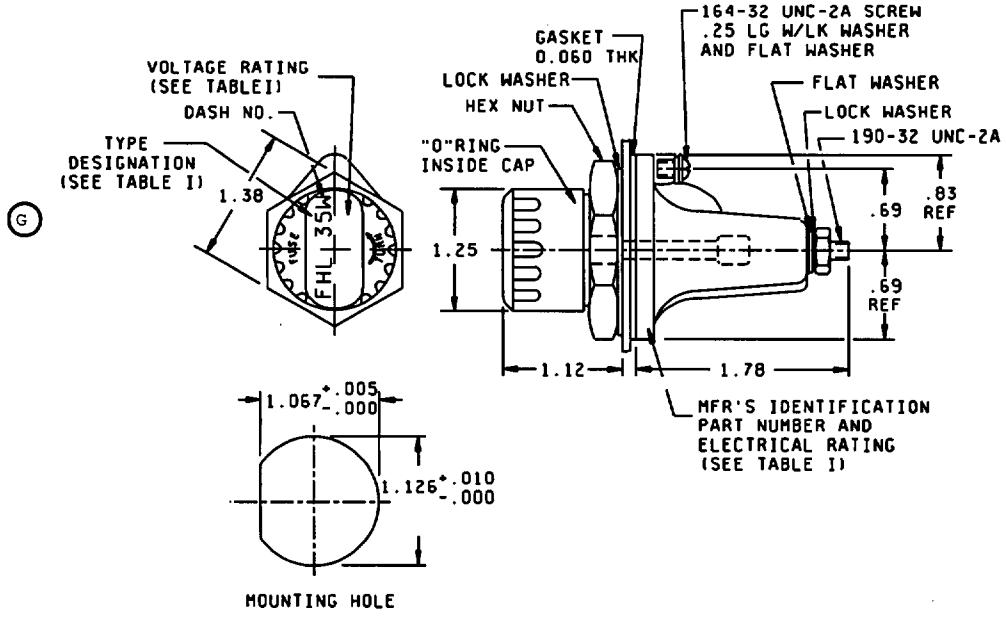

Inches	MM
0.005	0.13
0.010	0.25
0.060	1.52
.164	4.17
.190	4.83

Inches	MM
.25	6.35
.69	17.53
.83	21.08
1.067	27.20
1.12	18.60

Inches	MM
1.126	28.60
1.25	31.75
1.38	25.05
1.78	45.21

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.

FIGURE 1. *Type FHL35W fuseholder.*

(G) denotes changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1
(G) Body molding material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
  Ferrule type:
    Size: 0.406 inch (25.4 mm) diameter, 1.500 inches (38.10 mm) length
    Style: MIL-F-15160, F07, F09, and F60
Poles: One
(G) Rating: 30 amperes, voltage. See table I
Panel thickness: 0.125 inch (3.18 mm) maximum
(G) Indicating: One lamp. See table I
Lamp series resistor: See table I
Terminals: Threaded stud and screw type
Enclosure: Watertight
Test fuses:
  Temperature rise: F60C500V30A of MIL-F-15160/60
  Short circuit: F60C500V30A of MIL-F-15160/60
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals – 25 pounds-inch. Mounting – 30 pounds-inch.
  Cap insert – 15 pounds inch
Salt spray (corrosion): Test condition B
Military part number: M19207/24 (dash number from table I)
Type designation FHL35W: (dash number from table I)

TABLE I. *Indication characteristics.*

(G)

MIL/TYPE Dash No.	Volt	Lamp ind. No.	Resistance	Resistor type[1]	Resistor spec.	Cap color
–01	12–22	1764	Shorting wire	–	–	Amber
–02	23–33	1764	330	RCR07G331KM	MIL-R-39008/1	Amber
–03	34–45	1764	680	RCR07G681KM	MIL-R-39008/1	Amber
–04	46–60	1764	1,200	RCR07G2301KM	MIL-R-39008/1	Amber
–05	61–80	1764	1,800	RCR07G1801KM	MIL-R-39008/1	Amber
–06	81–90	1764	2,000	RCR07G2001KM	MIL-R-39008/1	Amber
–07	2.5–4	1784	Shorting wire	–	–	Amber
–08	5–7	1705	Shorting wire	–	–	Amber
–09	8–11	1705	Shorting wire	–	–	Amber
–10	1–2.4	2169	Shorting wire	–	–	Amber
–11	90–250V	Neon	330,000	RLR20C334GR		Clear
–12	90–500V	Neon	330,000	RLR20C334GR	MIL-R-39017/2	Clear

[1]MIL-R-39017 type RLR resistors can be used in lieu of RCR type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:32Z
Check the source to verify that this is the current version before use.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT, ME
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:32Z
Check the source to verify that this is the current version before use.