NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-19207/25D
23 August 1991
SUPERSEDING
MIL-F-19207/25C
31 August 1966


PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
NONINDICATING, TYPES FHN41W AND FHN41WB

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

(D)

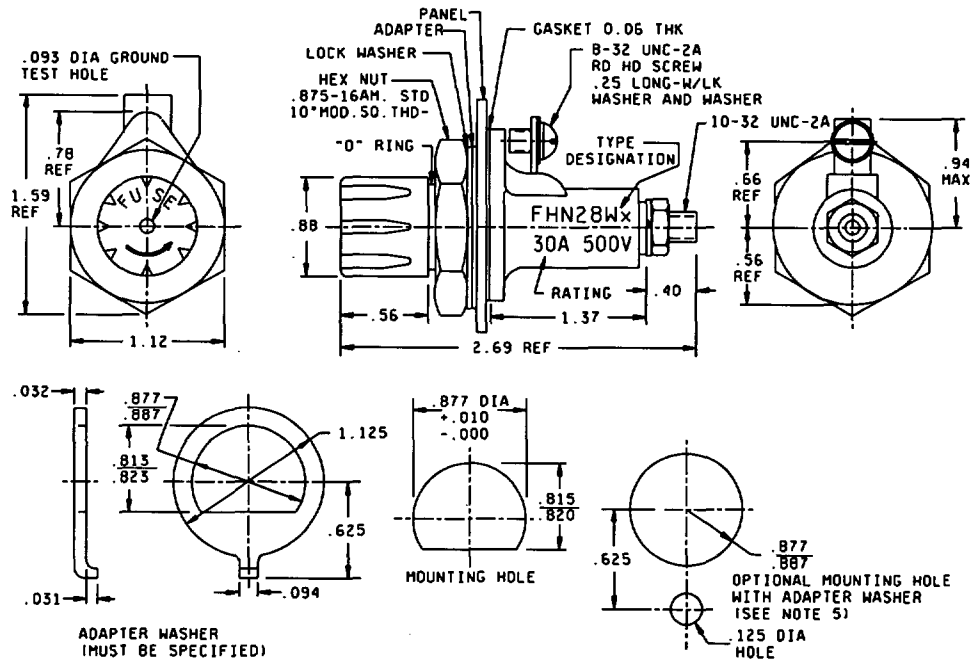

See notes on other page.

FIGURE 1. Type *FHL41W* and *FHN41WB*.

(D) denotes changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:33Z
Check the source to verify that this is the current version before use.

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
0.01	.25	.125	3.18	.56	13.36	0.813	20.65	.887	22.53
.015	.38	0.93	2.36	.625	15.88	.823	20.90	.94	23.88
.031	.79	.094	2.39	.66	16.76	.875	22.23	1.12	28.45
.032	.81	.25	6.35	.766	19.46	.877	22.28	1.125	28.58
.06	1.52	.4	10.16	.78	19.81	.88	22.35	1.37	34.80
								2.69	68.33

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are .XX ± .02, .XXX ± 005.
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Cap thread shall be 9/16–27 NEF2 thread with full provisions for cap interchangeability.
5. Round hole mounting for replacement only. Use adapter washer for non-watertight applications.

FIGURE 1. *Type FHN41W and FHN41WB – Continued.*

REQUIREMENTS:

Dimensions and configuration: See figure 1

Cap and body molding material: MAI-60 or GDI-30F of MIL-M-14

(D) Fuse accommodation:

Ferrule type:

Size: 0.406 inch (10.31 mm) diameter, 1.500 inches (38.10 mm) length

Styles: MIL-F-15160, F07, F09, F11, and F60

Poles: One

Rating: 30 amperes, 500 volts maximum

Panel thickness: 0.125 inch (3.18 mm) maximum

Nonindicating:

Lamp series indicator: None

Terminals: Threaded stud and screw type

(D) Enclosure: Watertight or watertight and body sealed (for submarine applications use FHN41WB

Weight: 2 ounces maximum

Test fuses:

Temperature rise: F60C500V30A of MIL-F-15160/60

Voltage drop: F60C500V30A of MIL-F-15160/60

Short circuit: F60C500V30A of MIL-F-15160/60

Mechanical shock: Method I of MIL-F-19207

Terminal strength: 20 pounds

Torque: Terminals – 25 pounds-inch. Mounting – 30 pounds-inch.
Cap insert – 30 pounds-inch Salt spray (corrosion): Test condition B

Dielectric:

Sea level: 2,000 volts

Reduced pressure: 750 volts

Military part number: M19207/25 (dash number from table I)

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:33Z
Check the source to verify that this is the current version before use.

TABLE I.

Military part number	Fuse holder
-001	FHN41W
-002	FHN41WB

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:33Z
Check the source to verify that this is the current version before use.