

MILITARY SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING, TYPE FHN42W

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the fuseholders described herein shall consist of this specification sheet and the latest issue of MIL-F-19207.

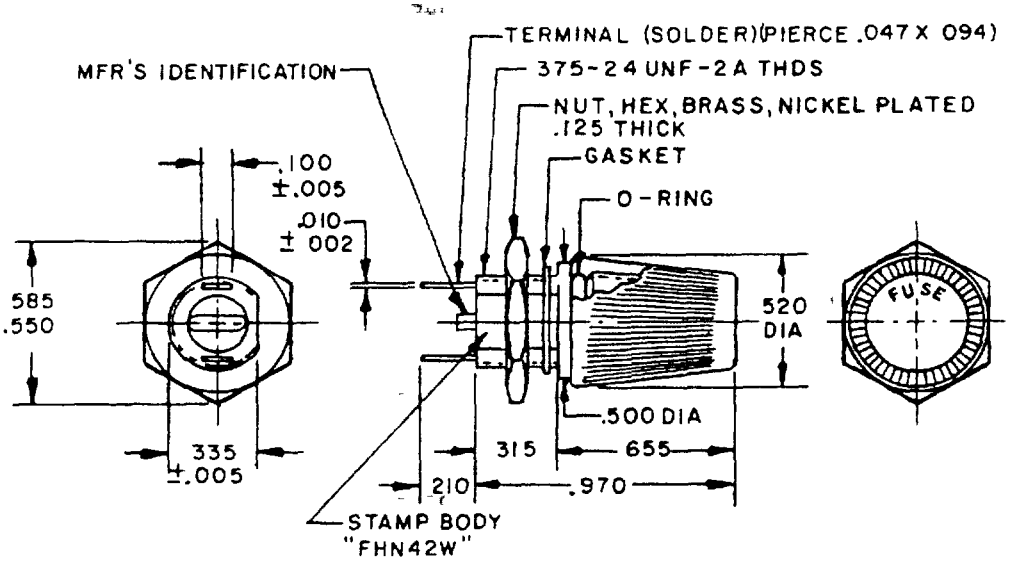



INCHES	MM	INCHES	MM
.002	.05	.335	8.51
.005	.13	.344	8.74
.010	.25	.379	9.63
.047	1.19	.500	12.70
.094	2.39	.520	13.21
.100	2.54	.550	13.97
.125	3.18	.585	14.87
.210	5.41	.655	16.64
.315	8.00	.970	24.64

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance for three place decimals is ±.015 (.38 mm).

FIGURE 1. Type FHN42W fuseholder.

(F) denotes changes

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1

Cap and body molding material MAI-60 of MIL-M-14

(F) Fuse accommodation

Miniature plug type MIL-F-23419, FM01 and FM02 Fuse is not captive in cap at removal. The maximum height fuse the fuseholder cap will accept is 0.363 inches (including terminals)

Poles One

Rating 5 amperes, 125 volts maximum

Panel thickness 0.125 inch (3.18 mm) maximum.

Nonindicating

Terminals Solder lug type

Enclosure Watertight.

Thermal shock temperature +125, -65

Contact resistance:

Initial: 0.006 ohms maximum.

After endurance test 0.010 ohms maximum.

(F) Contact surfaces Contact surfaces may be plated in accordance with MIL-P-81728.

Gaskets and O-rings ZZ-R-765.

Marking. Current and voltage ratings must be marked on the unit packages.

Test fuses

Temperature rise: FM01-5A, MIL-F-23419/1.

Vibration and mechanical shock FM01 5A, MIL-F-23419/1.

Short circuit FM01-5A, MIL-F-23419/1.

Temperature rise 45°C maximum.

Mechanical shock Method I of MIL-F-19207.

Thermal shock: Method 107, test condition B, MIL-STD-202.

Endurance 500 insertions and removals of cap and FM01 fuse.

Torque Cap - 4 pound - inches.

Mounting 10 pound - inches

Salt spray (corrosion): Method 101, test condition B, MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:33Z
Check the source to verify that this is the current version before use.

Custodians
Army - ER
Navy - SH
Air Force - 85

Review activities
Army - MI, CE, AR
Navy - AS
Air Force - 17, 99

User activities:
Army - ME, AV
Navy - MC, CG
Air Force - 19

Agent
DLA - ES

Preparing activity
Navy - SH

(Project 5920-0400-1)

☆U.S GOVERNMENT PRINTING OFFICE 1983-605-034/2110

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:33Z
Check the source to verify that this is the current version before use.