
MILITARY SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING,

TYPE FHL44G

The complete requirements for procuring the fuseholders described herein shall consist of this document and the latest issue of Specification MIL-F-19207.

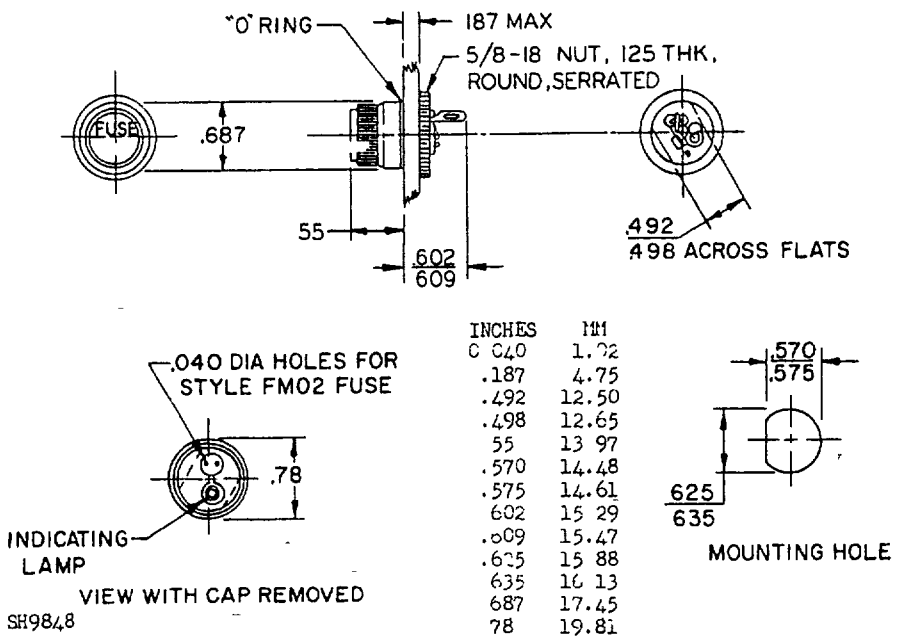

INCHES	MM
C .040	1.02
.187	4.75
.492	12.50
.498	12.65
55	13 97
.570	14.48
.575	14.61
.602	15 29
.609	15.47
.625	15 88
.635	16 13
.687	17.45
.78	19.81

Figure 1 - Type FHL44G fuseholder.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are: .XX ± .02, .XXX ± .005.
3. Metric equivalents (to the nearest .01 mm) are given for general information only, and are based upon 1 inch = 25.4 mm.

(C) denotes changes.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Body molding material: GDI-30F of MIL-M-19833 or SDG-F of MIL-M-14.

Fuse accommodation:

Miniature plug type: MIL-F-23419, FM02. Fuse is not captive in cap at removal.

Poles: One.

Rating: 5 amperes (see table I for voltage).

Panel thickness: 0.187 inch maximum.

(C) Indicating: Incandescent lamp 1762X or 1764 with amber color cap.

Lamp series resistor: See table I.

Terminals: Solder lug type.

Enclosure: Dripproof.

Gaskets: ZZ-R-765, class III.

Test fuses: FM02-5A of MIL-F-23419.

Marking: In addition to other required marking, a dash number shall follow the type designation and shall be associated with the voltage rating in accordance with table I.

Mechanical shock: Method I of MIL-F-19207.

Thermal shock: Method 107, test condition B, MIL-STD-202.

Endurance: 500 insertions and removals of cap and fuse.

Torque: Cap - 4 pounds-inch.

Mounting: 10 pounds-inch.

Salt spray (corrosion): Test condition B.

Table I - Voltage and resistance.

Dash no.	Voltage	Resistance ohms	Resistor specification
1	12-22	Shorting wire in place of resistor	
2	23-33	330	RC20 - MIL-R-11
3	34-45	680	RW69 - MIL-R-26
4	46-60	1,200	RW79 - MIL-R-26
5	61-80	1,800	RW79 - MIL-R-26
6	81-90	2,000	RW79 - MIL-R-26

Custodians:
Army - EL
Navy - SH
Air Force - 11

Preparing activity:
Navy - SH
(Project 5920-0309)

Review activities:
Army - EL, MI, ME, MU
Navy - SH, OS, EC
Air Force - 11, 17, 85

User activities:
Army - AT
Navy - AS, MC
Air Force - 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:33Z
Check the source to verify that this is the current version before use.