
MILITARY SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING,

TYPE FHL45G

The complete requirements for procuring the fuseholders described herein shall consist of this document and the latest issue of Specification MIL-F-19207.

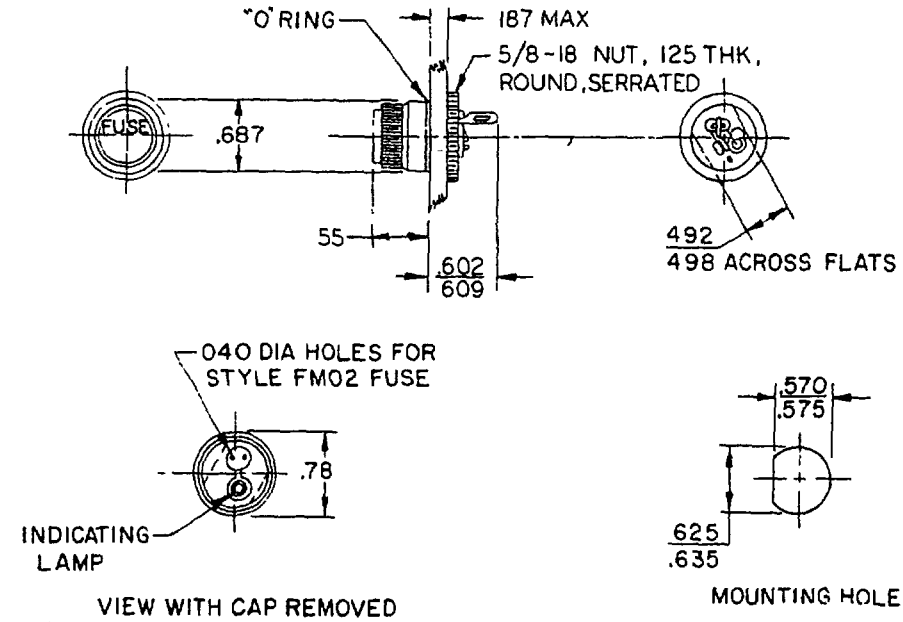

(C)

INCHES	MM	INCHES	MM
0.040	1.02	0.602	15 29
.187	4.75	.609	15.47
492	12.50	.625	15 88
.498	12 65	635	16 13
.55	13.97	.687	17.45
.570	14.48	.78	19.81
.575	14.61		

Figure 1 - Type FHL45G fuseholder.

NOTES:
1. Dimensions are in inches
2 Unless otherwise specified, tolerances are: .xx±.02, .xxx±.005.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Body molding material: GDI-30F of MIL-M-19833 or SDG-F of MIL-M-14.

Fuse accommodation

Miniature plug type: MIL-F-23419, FM02. Fuse is not captive in cap at removal.

(C) denotes changes.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.

Poles: One.

Rating 5 amperes, 90-125 volts

Panel thickness: 0.187 inch maximum.

C Indicating. Neon lamp with clear cap.

Lamp series resistor. MIL-R-11, 120,000 ohms.

Terminals: Solder lug type.

Gaskets: ZZ-R-765, class III.

Contact resistance: .004 ohms before endurance test and .006 ohms after test

Enclosure: Dripproof.

Test fuses:

Temperature rise: FM02-5A of MIL-F-23419.

Short circuit: FM02-5A of MIL-F-23419.

Mechanical shock: Method I of MIL-F-19207

Thermal shock: Method 107, test condition A, MIL-STD-202.

Torque: Cap - 4 pounds-inch.

Mounting: 10 pounds-inch.

Salt spray (corrosion): Test condition B

Custodians:
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - EL, MI, ME, MU
Navy - SH, OS, EC
Air Force - 11, 17, 85

User activities:
Army - AT
Navy - AS, MC
Air Force - 19

Preparing activity:
Navy - SH
(Project 5920-0308-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.