INCH-POUND
MIL-PRF-19207/29D
31 October 1997
SUPERSEDING
MIL-PRF-19207/29C
29 July 1969

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHN45G

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

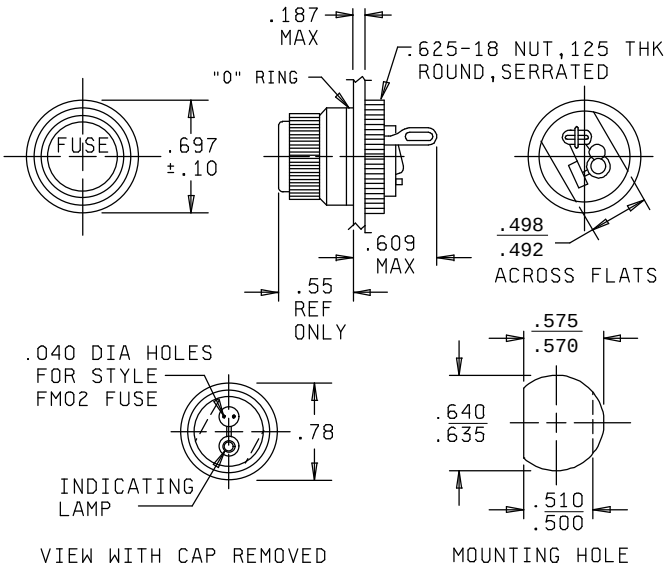

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.040	1.016	.498	12.65	.575	14.61	.697	17.70
.100	2.540	.500	12.70	.609	15.47	.780	19.81
.125	3.175	.510	12.95	.625	15.88		
.187	4.750	.550	13.97	.635	16.13		
.492	12.500	.570	14.48	.640	16.26		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two-place decimals and ±.005 (0.13 mm) for three-place decimals.
3. Metric equivalents (to the nearest .01 mm) are given for general information only.

Ⓓ FIGURE 1. Type FHL45G fuseholder.

Ⓓ Denotes changes.

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Ⓓ Body molding material: Body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodation:

Miniature plug type: MIL-PRF-23419, FM02. Fuse is not captive in cap at removal.

Poles: One.

Rating: 5 amperes, 90 volts to 125 volts.

Panel thickness: 0.187 inch (4.75 mm) maximum.

Indicating: Neon lamp with clear cap.

Ⓓ Lamp series resistor: MIL-R-39008, style RCR, 120,000 ohms. MIL-R-39008, style RCR resistors are inactive for new design. MIL-PRF-39017, style RLR resistors may be used as a possible replacement. This is a recommended replacement not a direct substitute.

Terminals: Solder lug type.

Gaskets: Gaskets shall be used that enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on gaskets are specified in the notes.

Contact resistance: .004 ohms before endurance test and .006 ohms after test.

Enclosure: Dripproof.

Test fuses:

Ⓓ Temperature rise: FM02A125V5A of MIL-PRF-23419.

Ⓓ Short circuit: FM02A125V5A of MIL-PRF-23419.

Mechanical shock: Method I of MIL-PRF-19207.

Thermal shock: Method 107, test condition A, MIL-STD-202.

Torque:

Cap: 4 pounds-inch.

Mounting: 10 pounds-inch.

Salt spray (corrosion): Test condition B.

Ⓓ NOTES:

Body molding material: It is recommended that type GDI-30F or SDG-F of MIL-M-14 be considered for meeting the body molding material requirements of this specification.

Gaskets: It is recommended that gaskets that meet class III of ZZ-R-765 be considered for use.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Preparing activity:
DLA - CC

(Project 5920-0506-03)

Review activities:
Army - AT, ME, MI
Navy - AS, EC, MC, OS
Air Force - 17, 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.