
INCH-POUND
MIL-PRF-19207/29H
6 March 2014
SUPERSEDING
MIL-PRF-19207/29G
17 July 2007

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL45G

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19207.

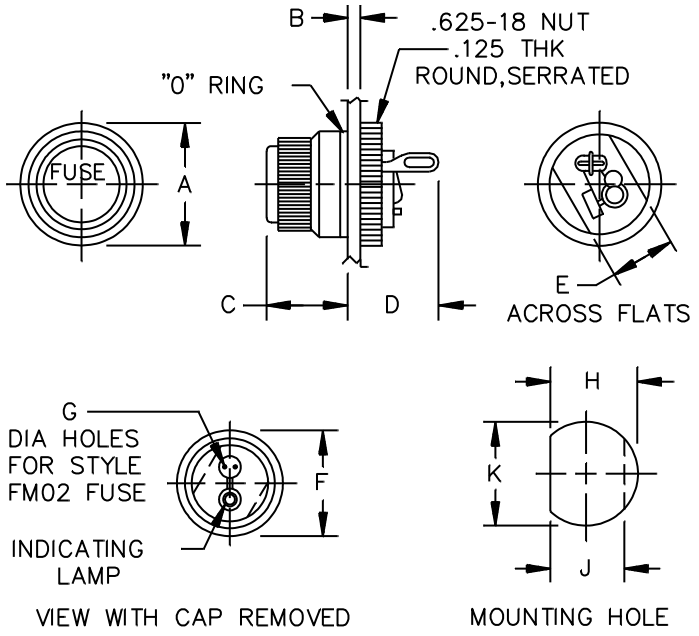

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	.597	.797	15.16	20.24	F	.760	.800	19.30	20.32
B	---	.187	---	4.75	G	.035	.045	.89	1.14
C	.550 (REF)		13.97 (REF)		H	.570	.575	14.48	14.61
D	---	.609	---	15.47	J	.500	.510	12.70	12.95
E	.492	.498	12.50	12.65	K	.635	.640	16.13	16.26

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two-place decimals and ±.005 (0.13 mm) for three-place decimals.
3. Metric equivalents (to the nearest .01 mm) are given for general information only.

FIGURE 1. Type FHL45G fuseholder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Body molding material: Body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodation:

Miniature plug type: FM02: MIL-PRF-23419/2, or equivalent size and style. Fuse is not captive in cap at removal.

Poles: One.

Rating: 5 amperes, 90 volts to 125 volts.

Panel thickness: 0.187 inch (4.75 mm) maximum.

Indicating: Neon lamp with clear cap.

Lamp series resistor: MIL-PRF-39017/2, style RLR, 120,000 ohms.

Terminals: Solder lug type.

Gaskets: Gaskets shall be used that enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on gaskets are specified in the notes.

Contact resistance: .004 ohms before endurance test and .006 ohms after test.

Enclosure: Dripproof.

Test fuses:

Temperature rise: FM02A125V5A of MIL-PRF-23419.

Short circuit: FM02A125V5A of MIL-PRF-23419.

Mechanical shock: Method I of MIL-PRF-19207.

Thermal shock: Method 107, test condition B, MIL-STD-202.

Torque:

Cap: 4 inch-pounds.

Mounting: 10 inch-pounds.

Salt spray (corrosion): Test condition B.

Part or Identifying Number (PIN): FHL45G.

NOTES:

Cap and body molding material: It is recommended that types MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 be considered for meeting the body molding material requirements of this specification. ASTM-D3935 is also suggested as guidance for cap material.

Gaskets: It is recommended that class 3 silicone rubber of A-A-59588 (Rubber, Silicone), be considered for use in meeting the gasket material requirements of this specification.

Referenced documents. In addition to MIL-PRF-19207, this document references the following:

MIL-STD-202 ASTM-D3935 ASTM-D5948 MIL-PRF-23419 MIL-PRF-23419/2 MIL-PRF-39017/2 A-A-59588

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing Activity:
DLA - CC

(Project 5920-2014-008)

Review Activities:
Army - AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.