NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-19207/30C
23 August 1991
SUPERSEDING
MIL-F-19207/30B
29 July 1969

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
NONINDICATING, TYPES FHN46W AND FHN46WB

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

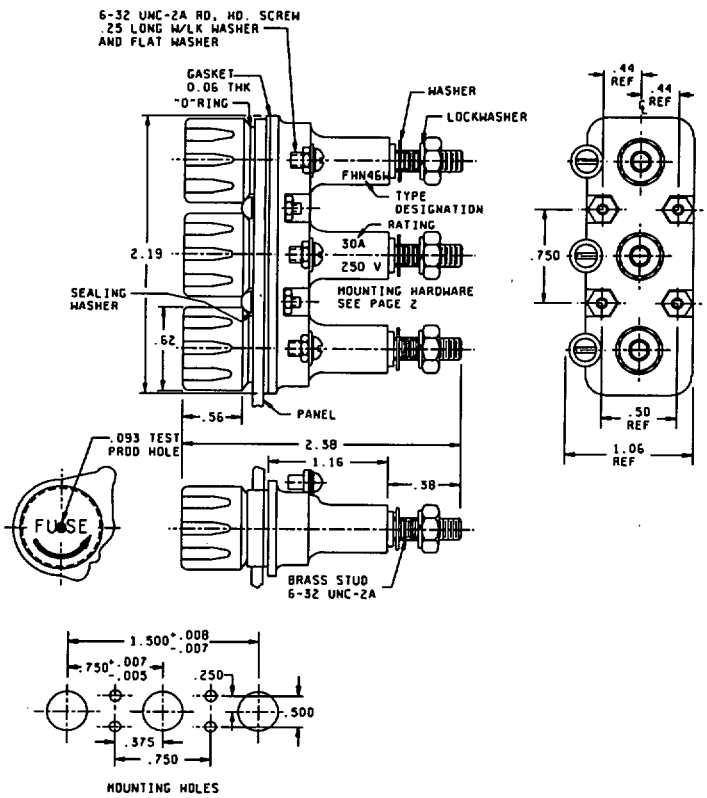

Inches	MM
0.005	0.13
.007	.18
.008	.20
.010	.25
.06	1.52
.093	2.36
.152	3.86
0.250	6.35
.375	9.53
.38	9.65
.44	11.18

Inches	MM
.500	12.70
.56	14.22
.593	15.06
.62	15.75
.750	19.05
1.06	26.92
1.16	29.46
1.500	38.10
2.19	55.63
2.38	60.45

See notes on other page.

FIGURE 1. *Type FHN46W and type FHN46WB fuseholder.*

© denotes changes.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:34Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only, and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.
4. Cap thread shall be 3/8-32NEF-2 and provide for cap interchangeability.

REQUIREMENTS:

Dimensions and configuration: See figure 1
Ⓒ Cap and body molding material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
  Ferrule type:
    Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length
    Styles: MIL-F-15160, F02 and F03, and MIL-F-23419, FM09
Poles: Three
Rating: 30 amperes maximum, 250 volts maximum
Panel thickness: 0.125 inch (3.18 mm) maximum
Nonindicating:
Terminals: Stud and screw type
Ⓒ Enclosure: Watertight or watertight and body sealed (for submarine applications, use FHN46WB)
Weight: 3 ounces maximum
Test fuses:
  Temperature rise: F03A125V30A of MIL-F-15160/03
  Voltage drop: F03A125V30A of MIL-F-15160/03
  Short circuit: F03A250V15A of MIL-F-15160/03
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 30 pounds
Torque: Cap – 36 pounds-inch, terminal – 12 pounds-inch
Salt spray (corrosion): Test condition B
Dielectric:
  Sea Level: 1, 500 volts
  Reduced pressure: 625 volts
Ⓒ Mounting hardware:
  Screw: 6-32UNC-2A, Round head with sealing washer
  Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.
Military part number: M19207/30 (dash number from table I)

TABLE I.

Military part number	Fuse holder
-001	FHN46W
-002	FHN46WB

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:34Z
Check the source to verify that this is the current version before use.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-16)

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:34Z
Check the source to verify that this is the current version before use.