NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-19207/31C
23 August 1991
SUPERSEDING
MIL-F-19207/31B
29 July 1969

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
NONINDICATING, TYPES FHN47W AND FHN47WB

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

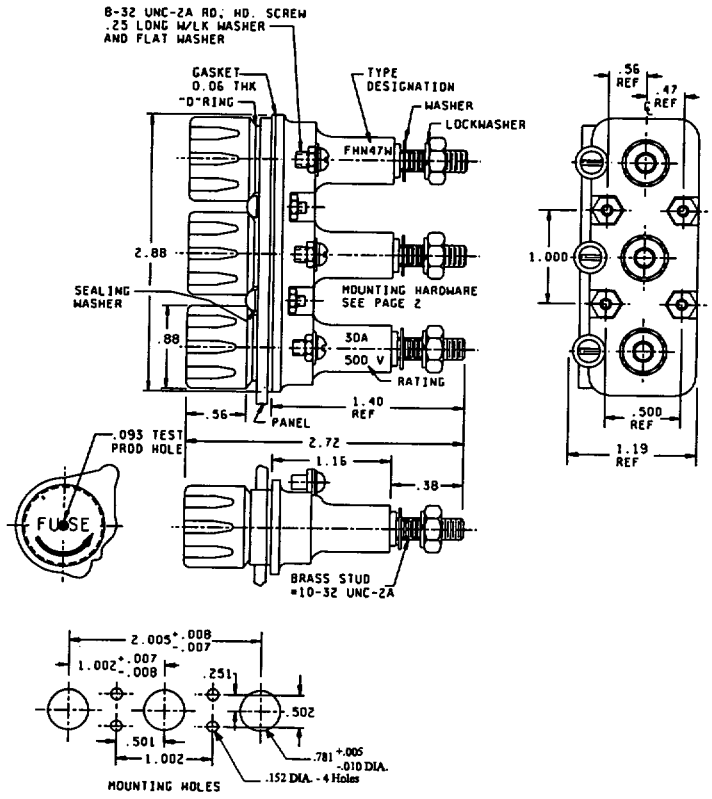

Inches	MM
0.005	0.13
.007	.18
.008	.20
.010	.25
.06	1.52
.093	2.36
.152	3.86
.25	6.35
.251	6.38
.38	9.65
.44	11.18
.47	11.94
.500	12.70

Inches	MM
.501	12.73
.502	12.75
.56	14.22
.781	19.84
0.88	22.35
1.000	25.4
1.002	25.45
1.19	30.23
1.40	35.56
2.005	50.93
2.72	69.09
2.88	73.15

See notes on other page.

FIGURE 1. *Type FHN47W and type FHN47WB fuseholder.*

Ⓒ denotes changes.

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:35Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only, and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.
4. Cap thread shall be 9/16-27NEF-2 threads with full provisions for cap interchangeability.

REQUIREMENTS:

Dimensions and configuration: See figure 1
Ⓒ Cap and body molding material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
  Ferrule type:
    Size: 0.406 inch (10.31 mm) diameter, 1.500 inches (38.10 mm) length
    Styles: MIL-F-15160, F07, F09, F11, and F60
Poles: Three
Rating: 30 amperes, 500 volts maximum
Panel thickness: 0.125 inch (3.18 mm) maximum
Nonindicating:
Terminals: Screw and threaded stud (see figure 1)
Enclosure: Watertight or watertight and body sealed (for submarine applications use FHN47WB)
Weight: 5.5 ounces maximum
Test fuses:
  Temperature rise: F60C500V30A of MIL-F-15160/60
  Voltage drop: F60C500V30A of MIL-F-15160/60
  Short circuit: F60C250V30A of MIL-F-15160/60
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 75 pounds
Torque: Cap – 36 pounds-inch, terminal – 25 pounds-inch
Salt spray (corrosion): Test condition B
Dielectric:
  Sea Level: 2, 000 volts
  Reduced pressure: 750 volts
Ⓒ Mounting hardware:
  Screw: 6-32UNC-2A, Round head with sealing washer
  Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.
Military part number: M19207/31 (dash number from table I)

TABLE I.

Military part number	Fuse holder
–001	FHN47W
–002	FHN47WB

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:35Z
Check the source to verify that this is the current version before use.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.