CAUTION: Users are cautioned regarding the new torque terminal requirement which is lowered from 25 inch-pounds to 15 inch-pounds. (See page 3).

INCH-POUND

MIL-PRF-19207/31F
w/AMENDMENT 2
14 January 2025


SUPERSEDING
MIL-PRF-19207/31F
w/AMENDMENT 1
5 May 2023

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING, TYPES FHN47W AND FHN47WB

This specification is approved for use by all departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19207.

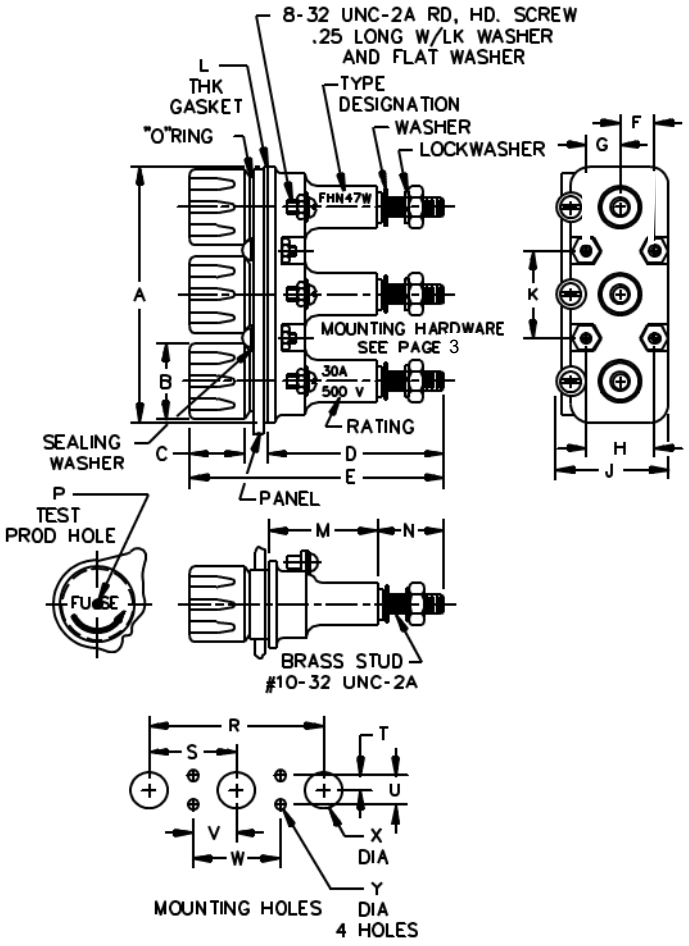

See notes on page 2.

FIGURE 1. Type FHN47W and type FHN47WB fuseholder.

AMSC N/A

FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	2.860	2.900	72.64	73.66	M	1.450	(REF)	36.83	(REF)
B	.860	.900	21.84	22.86	N	.360	.400	9.14	10.16
C	.540	.580	13.72	14.73	P	.088	.098	2.24	2.49
D	1.400 (REF)		35.56 (REF)		R	2.000	2.013	50.80	51.13
E	2.700	2.740	68.58	69.60	S	.994	1.009	25.25	25.63
F	.470 (REF)		11.94 (REF)		T	.246	.256	6.25	6.50
G	.560 (REF)		14.22 (REF)		U	.497	.507	12.62	12.88
H	1.030		26.16 (REF)		V	.496	.506	12.60	12.85
J	1.190 (REF)		30.23 (REF)		W	.997	1.007	25.32	25.58
K	.995	1.005	25.27	25.53	X	.771	.786	19.58	19.96
L	.040	.080	1.02	2.03	Y	.147	.157	3.73	3.99

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only, and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±0.02 (0.51 mm) for two place decimals and ±0.005 (0.13 mm) for three-place decimals.
4. Cap thread shall be 9/16-27NEF-2 and provide for cap interchangeability.
5. Cap and body molding material: It is recommended that types MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 be considered for meeting the cap and body molding material requirements of this specification.
6. Gaskets and O-rings: It is recommended that class 3 silicone rubber of A-A-59588 (Rubber, Silicone), be considered for use in meeting the gasket and o-ring material requirements of this specification.

FIGURE 1. Type FHN47W and type FHN47WB fuseholder - continued.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Cap and body molding material: Cap and body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on cap and body molding material are specified in the notes.

Fuse accommodation:

Ferrule type:

Size: 0.406 inch (10.31 mm) diameter, 1.500 inches (38.10 mm) length.
Styles: F07: MIL-PRF-15160/07, F09: MIL-PRF-15160/09, and F60: MIL-PRF-15160/60.
(or equivalent size and styles)

Poles: Three.

Rating: 30 amperes maximum, 500 volts maximum.

Panel thickness: 0.125 inch (3.18 mm) maximum.

Nonindicating.

Terminals: Screw and threaded stud (see figure 1).

Enclosure: Watertight or watertight and body sealed (for submarine applications use FHN47WB).

Weight: 5.5 ounces maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.

Gaskets and O-rings: Gaskets and O-rings shall be used that enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on gaskets and O-rings are specified in the notes.

Test fuses:

Temperature rise:	F60C500V30A of MIL-PRF-15160/60.
Voltage drop:	F60C500V30A of MIL-PRF-15160/60.
Short circuit:	F60C500V30A of MIL-PRF-15160/60.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque: Cap - 36 inch-pounds, terminal - 15 inch-pounds.

Salt spray (corrosion): Test condition B.

Dielectric:

Sea level:	2,000 volts.
Reduced pressure:	750 volts.

Mounting hardware:

Screw:	6-32UNC-2A, Round head with sealing washer.
Nut:	6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

Part or Identifying Number (PIN): FHN47W or FHN47WB, depending on type, see table I.

TABLE I.

Superseding PIN	Superseded military part number
FHN47W	M19207/31-001
FHN47WB	M19207/31-002

Referenced documents. In addition to MIL-PRF-19207, this document references the following:
ASTM-D5948 MIL-PRF-15160/7 MIL-PRF-15160/9 MIL-PRF-15160/60 A-A-59588

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Review Activities:
Army - AT, CR4, MI
Navy - AS, MC
Air Force - 70, 71

Preparing Activity:
DLA - CC

(Project 5920-2025-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:34Z
Check the source to verify that this is the current version before use.