NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-19207/36B(SH)
31 July 1978
SUPERSEDING
MIL-F-19207/36A (SHIPS)
29 July 1969


PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING, R. F. SHIELDED

TYPES FHN55W

(B) This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all departments and Agencies of the Department of Defense.

The complete requirements for procuring the fuseholders described herein shall consist of this document and the latest issue of MIL-F-19207.

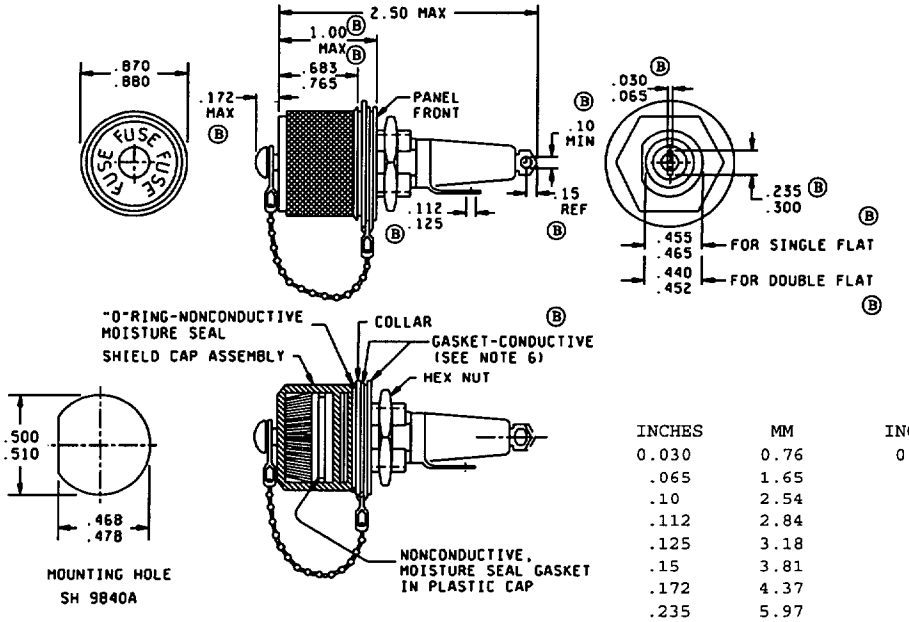

INCHES	MM	INCHES	MM
0.030	0.76	0.455	11.56
.065	1.65	.465	11.81
.10	2.54	.468	11.89
.112	2.84	.478	12.14
.125	3.18	.500	12.70
.15	3.81	.510	12.95
.172	4.37	.683	17.35
.235	5.97	.765	19.43
.250	6.35	.870	22.10
.300	7.62	.880	22.35
.440	11.18	1.00	25.40
.452	11.48	1.250	31.75
		2.50	63.50

FIGURE 1. Type FHN55W fuseholder.

NOTES:
1. All dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
(B) 3. Unless otherwise specified, tolerances for two place decimals shall be .xx ± .02(0.5) and for three place decimals .xxx ± .005(0.13).
(B) 4. Collar shall be keyed to non-turn flat (single or double) on fuseholder body.
5. Terminal configurations optional within overall dimensiona.
(B) 6. One or two conductive gaskets as required for shield continuity.

(B) Denotes changes.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.

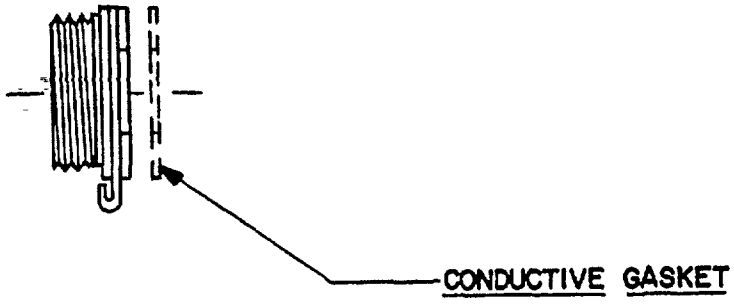


FIGURE 2. Collar and chain retainer alternate assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(B) Dimensions and configuration: See figures 1 and 2.
(B) Cap and body molding material: GDI-30F or SDG-F of MIL-M-14.
Gaskets and o-rings nonconductive: ZZ-R-765.

(B) Gaskets and o-rings, conductive: Knitted nickel copper aluminum alloy impregnated with silicone rubber, ZZ-R-765.
(B) Shield cap, collar and associated hardware: Brass, with lusterless black finish on exterior, nonconductive surfaces, (collar and chain retainer ring excluded).

Fuse accomodation:

Ferrule type:

Size: 0.250 inch diameter, 1.250 inch length.
Style: MIL-F-15160, FO2 and FO3 and MIL-F-23419, FM03.

Poles: One.
Rating: 30 amperes, 250 volts maximum.
Panel thickness: 0.125 inch maximum.
Nonindicating:
Lamp series resistor: None.
Terminals: Solder lug type.
Enclosure: Watertight, with shield cap secured.
Test fuses:
Temperature rise: FO3A125V30A of MIL-F-15160/3.
Short circuit: FO3A250V15A of MIL-F-15160/3.
Mechanical shock: Method II of MIL-F-19207.
Terminal strength: 5 pounds.
Torque: Mounting - 20 pounds-inch.
Salt spray (corrosion): Test condition B.
Shield continuity: With fuseholder mounted normally and shield cap in place, electrical resistance from shield cap to mounting panel shall not exceed 0.5 ohms.

Preparing activity:
Navy - SH
(Project 5920-N157)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-F-19207/36B

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.

FOLD

COMMANDER
NAVAL SHIP ENGINEERING CENTER (SEC 6124)
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID

DEPARTMENT OF THE NAVY

DOD 316

U.S.MAIL

COMMANDER
NAVAL SHIP ENGINEERING CENTER (SEC 6124)
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20362

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.