
INCH-POUND
MIL-PRF-19207/36E
6 March 2014
SUPERSEDING
MIL-PRF-19207/36D
17 July 2007

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING, R. F. SHIELDED, TYPE FHN55W

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19207.

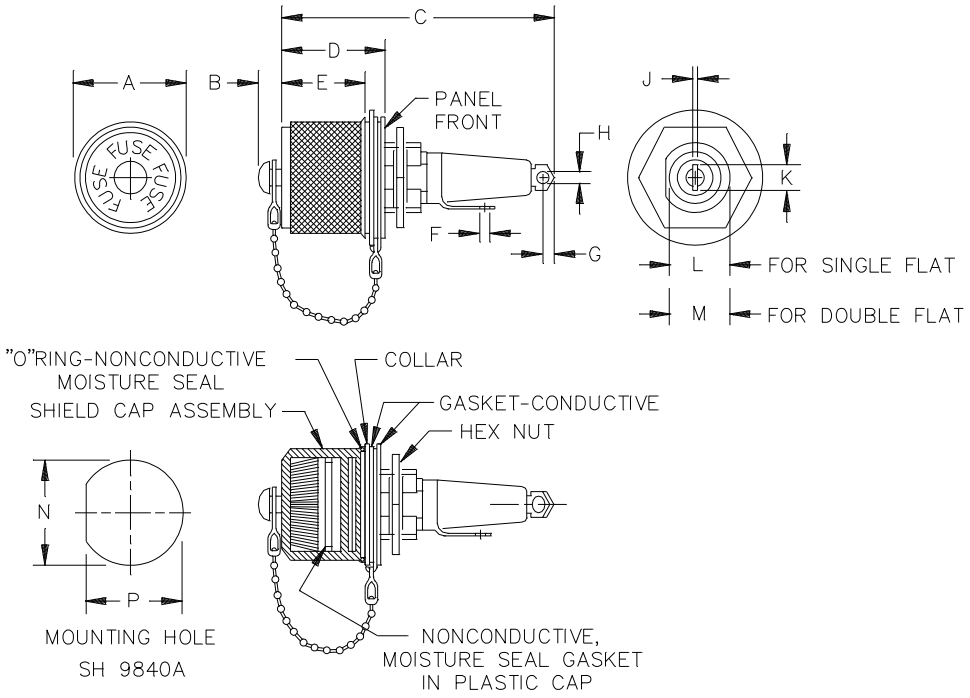

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	.870	.880	22.10	22.35	H	.100	---	2.54	---
B	---	.172	---	4.37	J	.030	.065	.76	1.65
C	---	2.500	---	6.35	K	.235	.300	5.97	7.62
D	---	1.000	---	25.40	L	.455	.465	11.56	11.81
E	.683	.765	17.35	19.43	M	.440	.452	11.18	11.48
F	.112	.125	2.84	3.18	N	.500	.510	12.70	12.95
G	.150 (REF)		3.81 (REF)		P	.468	.478	11.89	12.14

See notes on page 2.

FIGURE 1. Type FHN55W fuseholder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances for two place decimals shall be ± .02 inch (0.5 mm) for two place decimals and ± .005 inch (0.13 mm) for three place decimals.
4. Collar shall be keyed to non-turn flat (single or double) on fuseholder body.
5. Terminal configurations optional within overall dimensions.
6. One or two conductive gaskets as required for shield continuity.
7. Cap and body molding material: It is suggested that type MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 be considered for meeting the cap and body molding material requirements of this specification. ASTM-D3935 is also suggested as guidance for cap material.
8. Gaskets and O-rings, nonconductive: It is suggested that gaskets and O-rings that meet class 3 of A-A-59588 be considered for use.
9.. Gaskets and O-rings, conductive: Knitted nickel copper aluminum alloy impregnated with silicone rubber (A-A-59588) has been used successfully, in the past, to meet the performance requirements of this specification.

FIGURE 1. Type FHN55W fuseholder.

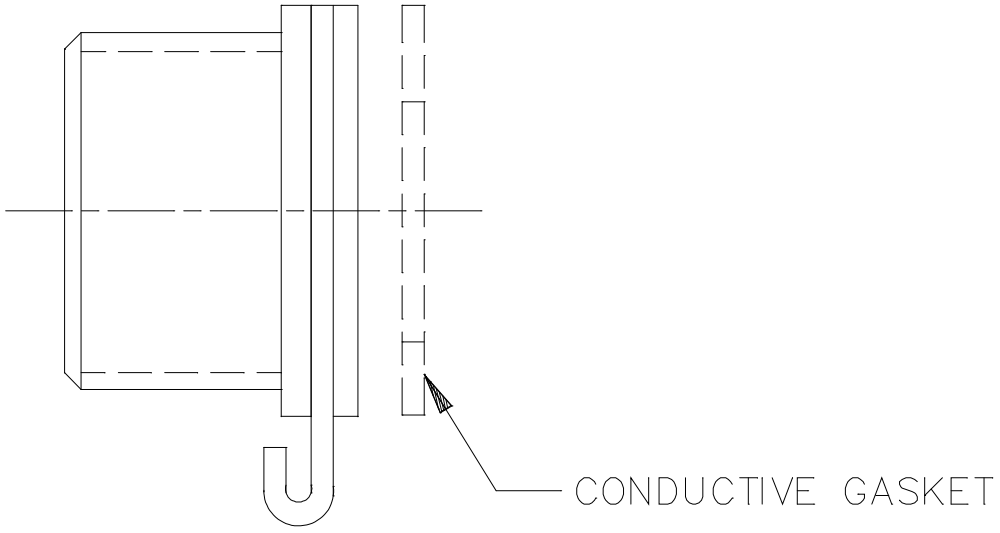


FIGURE 2. Collar and chain retainer alternate assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figures 1 and 2.

Cap and body molding material: Cap and body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Gasket and o-rings: Gaskets and o-rings shall be used that enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on gaskets and o-rings are specified in the notes.

Shield cap, collar, and associated hardware: Brass, with lusterless black finish on exterior, nonconductive surfaces, (collar and chain retainer ring excluded).

Fuse accommodation:

Ferrule type:

Size: .250 Inch (6.35 mm), 1.250 inch (31.75 mm) length.

Style: F02: MIL-PRF-15160/2, F03: MIL-PRF-15160/3 and FM09: MIL-PRF-23419/9.

(or equivalent size and style)

Poles: One.

Rating: 30 amperes, 250 volts maximum.

Panel thickness: .125 inch (3.18 mm) maximum.

Nonindicating:

Lamp series resistor: None.

Terminals: Solder lug type.

Enclosure: Watertight, with shield cap secured.

Test fuses:

Temperature rise: F03A125V30A of MIL-PRF-15160/3.

Short circuit: F03A125V30A of MIL-PRF-15160/3.

Mechanical shock: Method II of MIL-PRF-19207.

Terminal strength: 5 pounds.

Torque: Mounting - 20 inch-pounds.

Salt spray (corrosion): Test condition B.

Shield continuity: With fuseholder mounted normally and shield cap in place, electrical resistance from shield cap to mounting panel shall not exceed 0.5 ohms.

Part or Identifying Number (PIN): FHN55W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-19207, this document references the following:

ASTM-D3935 ASTM-D5948 MIL-PRF-15160/2 MIL-PRF-15160/3 MIL-PRF-23419/9 A-A-59588

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Review Activities:
Army - AR
Navy - AS

Preparing Activity:
DLA - CC

(Project 5920-2013-035)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:35Z
Check the source to verify that this is the current version before use.