NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-19207/38B
23 August 1991
SUPERSEDING
MIL-F-19207/38(SHIPS)
10 April 1974

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING, TYPE FHL57G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirement for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

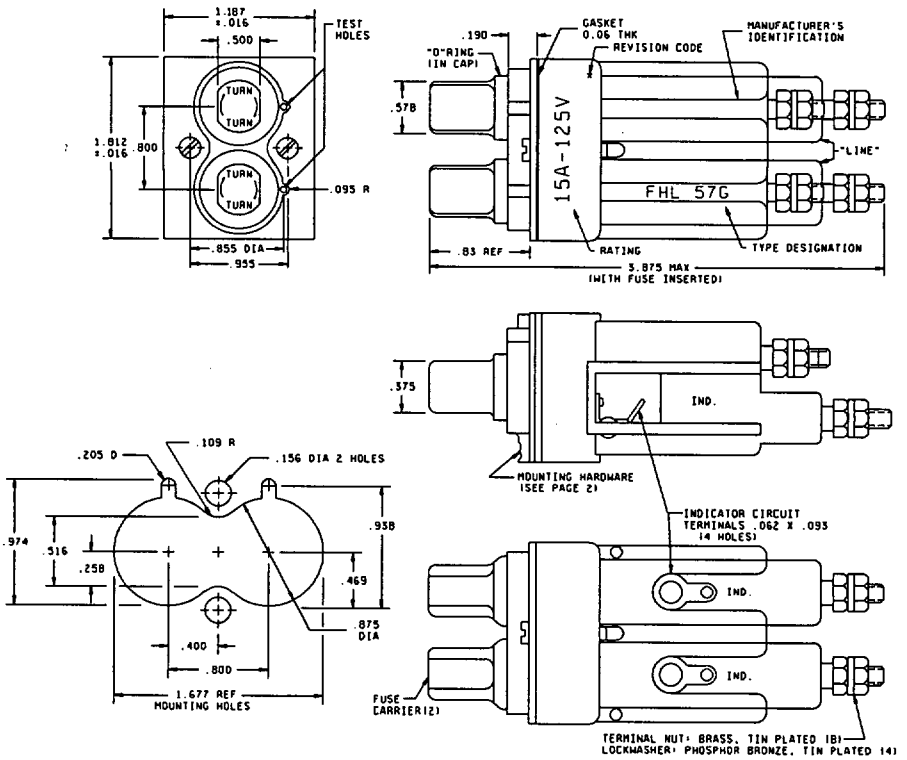

Ⓑ

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
.016	.41	.156	3.96	.500	12.70	.205	5.21	.974	24.74
.06	1.52	.190	4.83	.516	13.11	.83	21.08	1.187	30.15
.062	1.57	.375	9.53	.578	14.68	.875	22.23	1.675	42.55
.093	2.36	.400	10.16	.800	20.32	0.938	23.83	1.812	46.02
.095	2.41	0.469	11.91	.855	21.72	.955	24.26	3.875	98.43
0.109	2.77								

See notes on other page.

FIGURE 1. *Type FHL157G fuseholder.*

Ⓑ denotes changes.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5920


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. (B) Mounting hardware:

   Screw: 6-32UNC-2A, Flat head 1.125 inches long (min) (unless otherwise specified)
   Nut: 6-32UNC-2B Square. A threaded metal insert may be used in lieu of nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

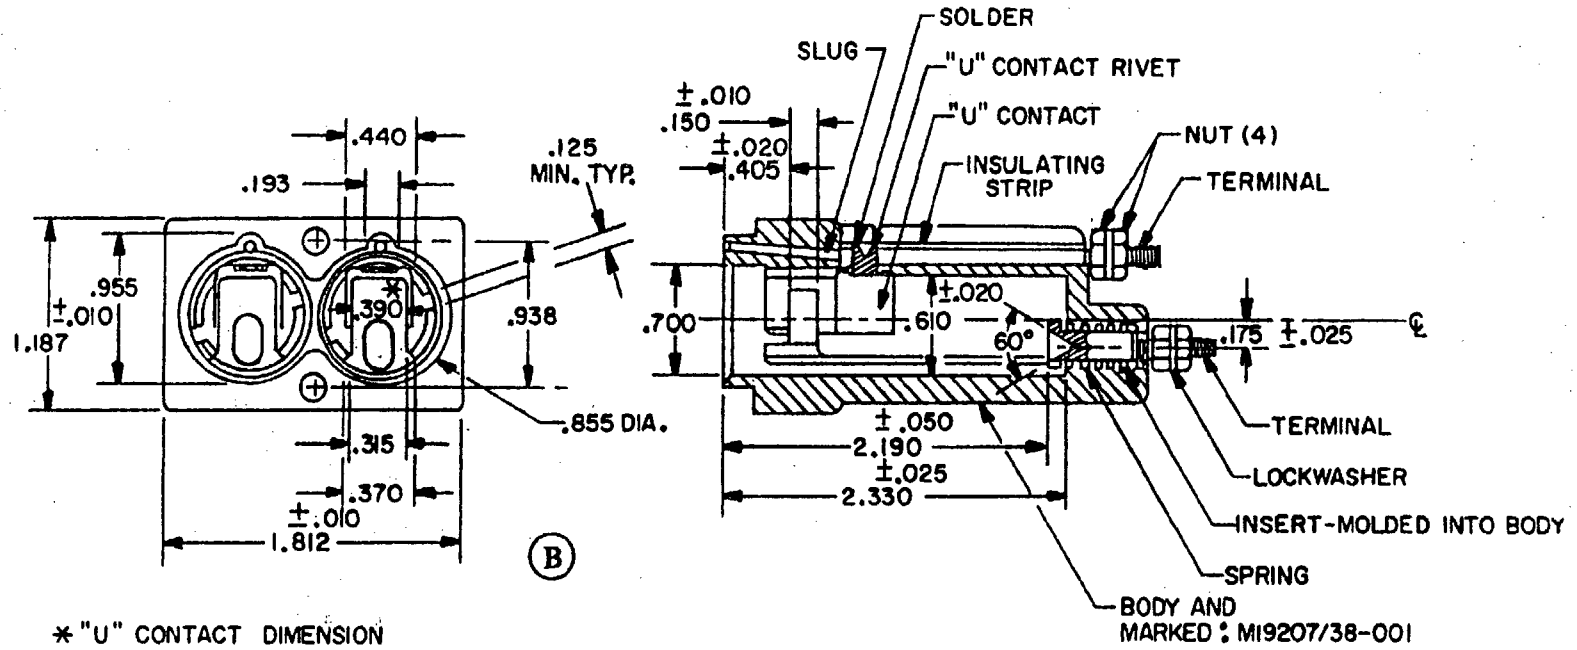


PART NO. MI9207/38-001

Inches	MM	Inches	MM	Inches	MM	Inches	MM
.010	0.25	.175	4.45	.405	10.29	.938	23.83
.020	0.51	.193	4.90	.440	11.18	1.187	30.15
.025	0.64	.315	8.00	.610	15.49	1.812	46.02
.050	1.27	.370	9.40	.700	17.78	2.190	55.63
.125	3.18	.390	9.91	.855	21.72	2.330	59.18
.150	3.81						

See notes on other page.

FIGURE 2. *Body for FHL57G fuseholders.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

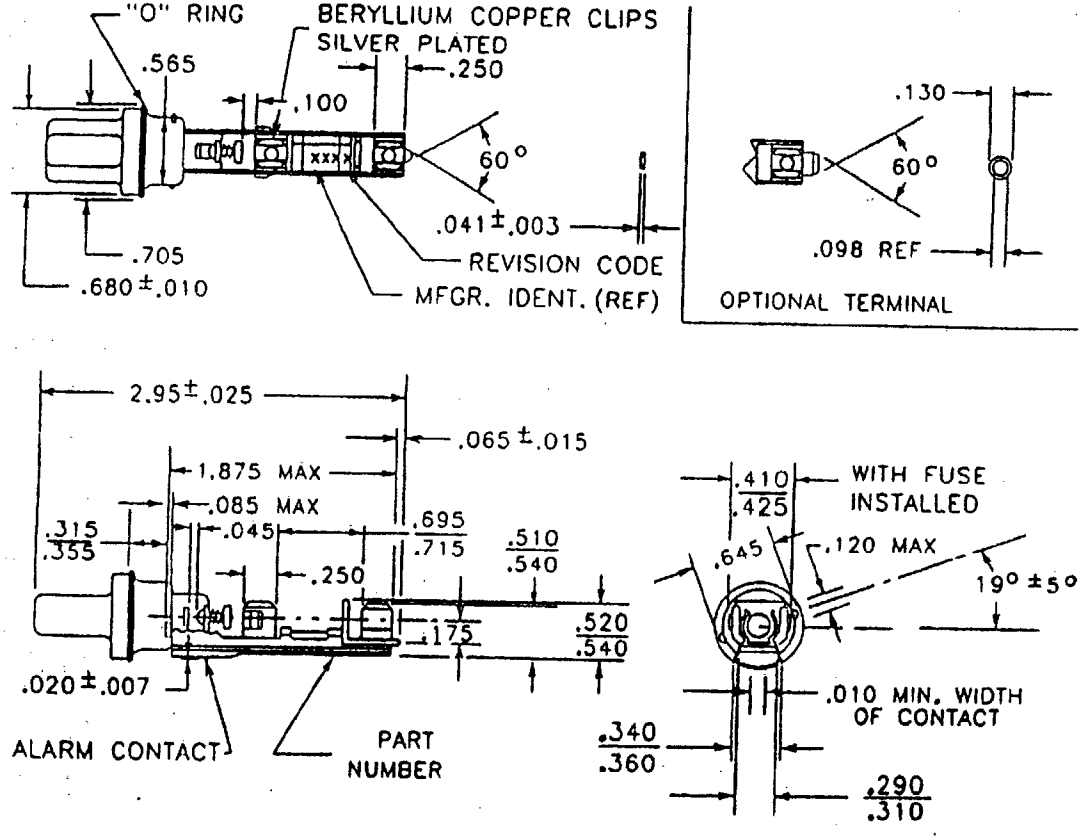

TOLERANCES ±.005 EXCEPT AS NOTED
PART NO. M19207/38-002 (IA0981)

See notes on other page.

Inches	MM	Inches	MM
.007	0.18	.680	17.27
.020	0.51	.695	17.63
.003	0.08	.705	17.91
.005	0.13	.715	18.16
.010	0.25	1.875	47.63
.015	0.38		

Inches	MM	Inches	MM
.025	0.64	2.95	74.93
.041	1.04	.120	3.05
.045	1.14	.290	7.37
.065	1.65	.310	7.87
.085	2.16	.315	8.00
.098	2.49		

Inches	MM	Inches	MM
.100	2.54	.340	8.64
.130	3.30	.355	9.02
.175	4.45	.360	9.14
.250	6.35	.645	16.38
.410	10.41		

Inches	MM
.425	10.80
.510	12.95
.520	13.21
.540	13.72
.565	14.35

(B)

FIGURE 3. *Fuse carrier for FHL57G and FHL58G.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

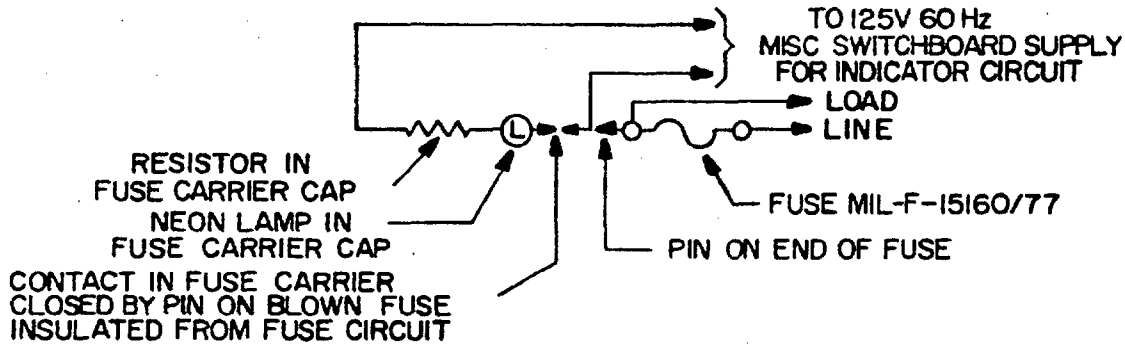


FIGURE 4. *Schematic of FHL57G fuseholder.* (B)

REQUIREMENTS:

Dimensions, configuration, and material: See figures 1, 2 and 3
Body material: MAI-60 or GDI-30F of MIL-M-14, MIL-P-19833
Fuse accommodations:
Ferrule type, alarm indicating:
Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (28.58 mm) length (nominal)
Style: F77 of MIL-F-15160/77
Poles: Two
Rating: 15 amperes, 125 volts
Panel thickness: 0.125 inch (3.18 mm) maximum
Indicating: Polycarbonate lens neon lamp
(B) Lamp series resistor: MIL-R-39008/1 or MIL-R-39017/1, 120,000 ohms
Fuse carrier: The spring constant for the switch spring shall be such that a force of 0.56 ounce is required to compress the spring 0.045 inch (1.14 mm)
Terminals: Stud type, No. 8-32UNC-2A thread. Brass, silver, or tin plated. Solder type, brass, silver plated
Test fuses:
Temperature rise: F77A125V15A of MIL-F-15160/77
Short circuit: F77A125V15A of MIL-F-15160/77
Mechanical shock: Method I of MIL-F-19207. Momentary opening of indicating circuit contacts permitted
Terminal strength: 20 pounds (stud terminals)
5 pounds (solder terminal)
Torque: Terminals – 15 pounds-inch
Salt spray (corrosion): Test condition B

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19

Preparing activity:
Navy – SH
(Project 5920-0459-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.