
INCH-POUND
MIL-PRF-19207/38C
30 April 2001
SUPERSEDING
MIL-F-19207/38B
23 August 1991

PERFORMANCE SPECIFICATION SHEET

# FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL57G

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirement for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

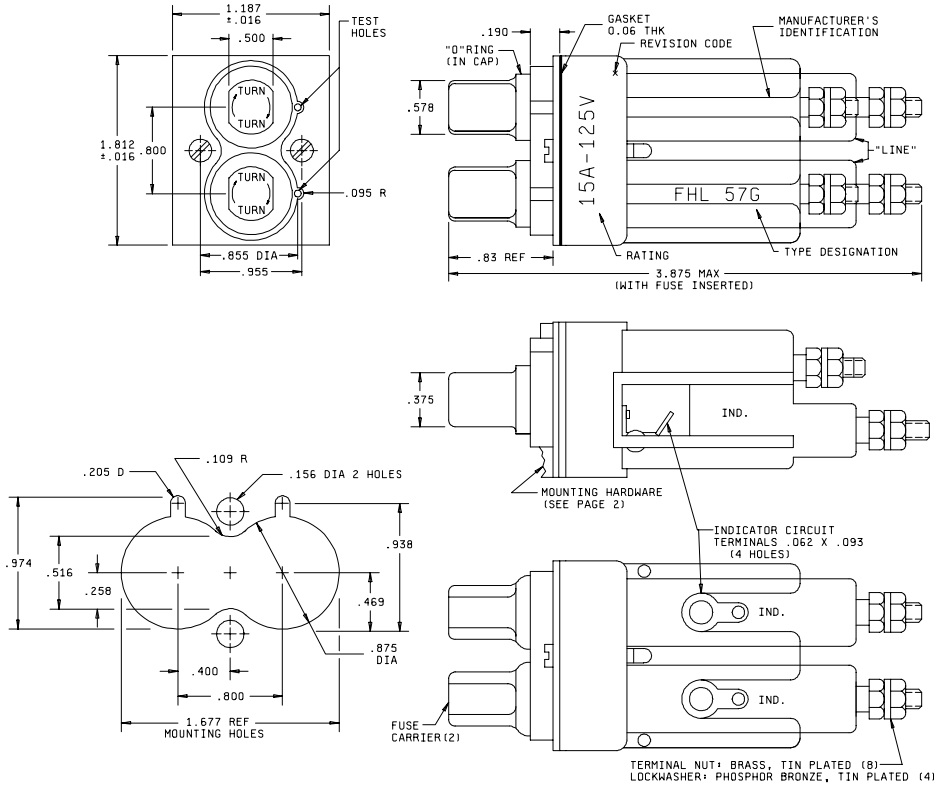



| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .016 | 0.41 | .156 | 3.96 | .469 | 11.91 | .83 | 21.08 | .974 | 24.74 |
| .06 | 1.52 | .190 | 4.83 | .500 | 12.70 | .855 | 21.72 | 1.187 | 30.15 |
| .062 | 1.57 | .205 | 5.21 | .516 | 13.11 | .875 | 22.23 | 1.675 | 42.55 |
| .093 | 2.36 | .375 | 9.53 | .578 | 14.68 | .938 | 23.83 | 1.812 | 46.02 |
| .095 | 2.41 | .400 | 10.16 | .800 | 20.32 | .955 | 24.26 | 3.875 | 98.43 |
| .109 | 2.77 | | | | | | | | |

See notes at end of figures.

FIGURE 1. Type FHL57G fuseholder.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

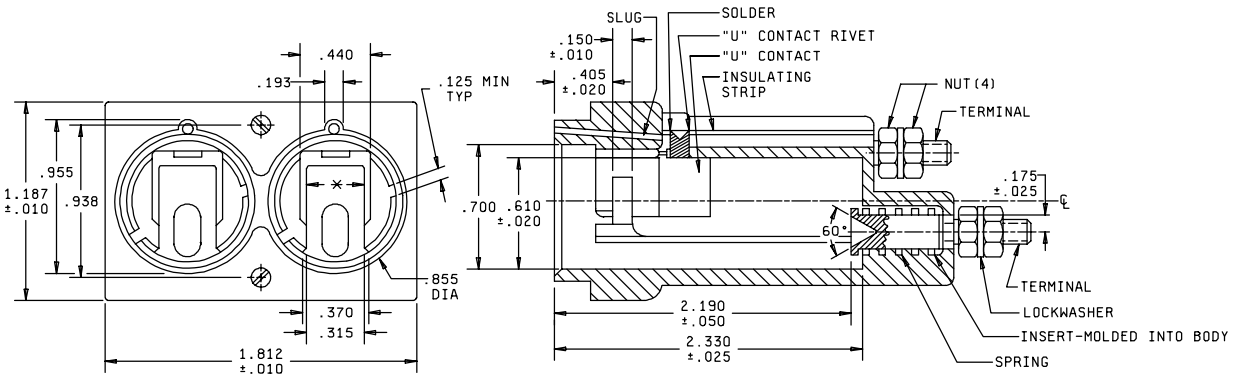


* "U" contact dimension .390


| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .010 | 0.25 | .175 | 4.45 | .405 | 10.29 | .938 | 23.83 |
| .020 | 0.51 | .193 | 4.90 | .440 | 11.18 | 1.187 | 30.15 |
| .025 | 0.64 | .315 | 8.00 | .610 | 15.49 | 1.812 | 46.02 |
| .050 | 1.27 | .370 | 9.40 | .700 | 17.78 | 2.190 | 55.63 |
| .125 | 3.18 | .390 | 9.91 | .855 | 21.72 | 2.330 | 59.18 |
| .150 | 3.81 | | | | | | |

See notes at end of figures.

FIGURE 2. Body for FHL57G fuseholders.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

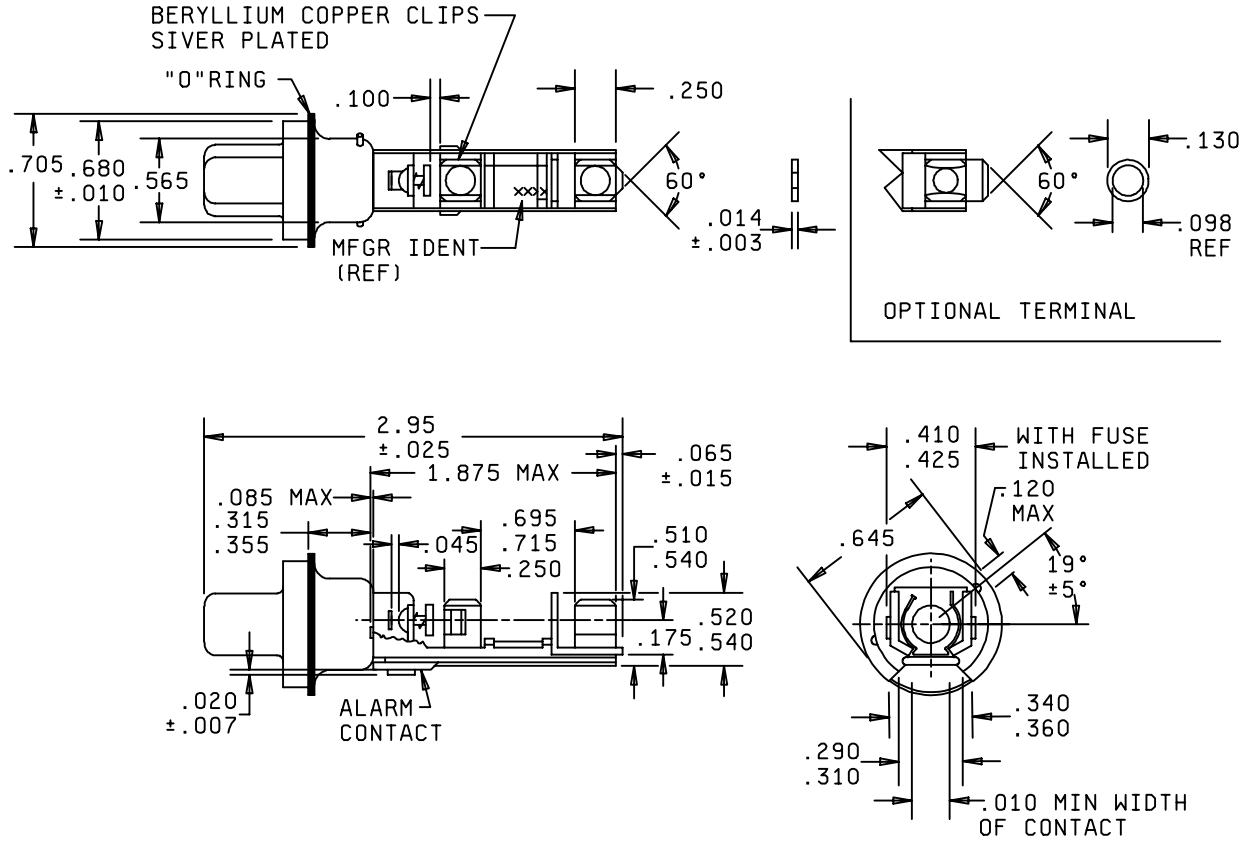


| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|---|---|
| .003 | 0.08 | .025 | 0.64 | .100 | 2.54 | .310 | 7.87 | .425 | 10.80 | .680 | 17.27 |
| .005 | 0.13 | .041 | 1.04 | .120 | 3.05 | .315 | 8.00 | .510 | 12.95 | .695 | 17.63 |
| .007 | 0.18 | .045 | 1.14 | .130 | 3.30 | .340 | 8.64 | .520 | 13.21 | .705 | 17.91 |
| .010 | 0.25 | .065 | 1.65 | .175 | 4.45 | .355 | 9.02 | .540 | 13.72 | .715 | 18.16 |
| .015 | 0.38 | .085 | 2.16 | .250 | 6.35 | .360 | 9.14 | .565 | 14.35 | 1.875 | 47.63 |
| .020 | 0.51 | .098 | 2.49 | .290 | 7.37 | .410 | 10.41 | .645 | 16.38 | 2.95 | 74.93 |

See notes at end of figures.

FIGURE 3. Fuse carrier for FHL57G.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

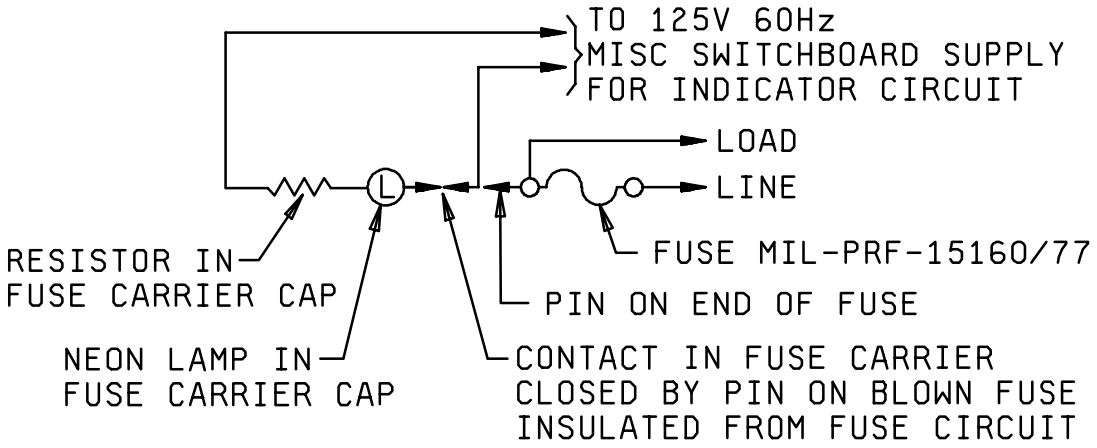



FIGURE 4. Schematic of FHL57G fuseholder.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three decimal places.
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Mounting hardware:
   Screw: 6-32UNC-2A, flat head 1.125 inches (28.58 mm) long (minimum) (unless otherwise specified).
   Nut: 6-32UNC-2B square. A threaded metal insert may be used in lieu of nut.
5. Cap and body molding material: It is suggested that type MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 be considered for meeting the cap and body molding material requirements of this specification. ASTM-D3935 is also suggested as guidance for cap material.

REQUIREMENTS:

Interface and physical dimensions: See figures 1, 2, and 3.

Cap and body molding material: Cap and body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodations:

Ferrule type, alarm indicating:

Size: .250 inch (6.35 mm) diameter, 1.250 inches (28.58 mm) length (nominal).

Style: F77 of MIL-PRF-15160/77.

(or equivalent size and style)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

Poles: Two.

Rating: 15 amperes, 125 volts.

Panel thickness: .125 inch (3.18 mm) maximum.

Indicating: Polycarbonate lens neon lamp.

Lamp series resistor: MIL-R-39017/1, 120,000 ohms.

Fuse carrier: The spring constant for the switch spring shall be such that a force of 0.56 ounce is required to compress the spring .045 inch (1.14 mm).

Terminals: Stud type, No. 8-32UNC-2A thread. Brass, silver, or tin-plated. Solder type, brass, silver plated.

Test fuses:

Temperature rise: F77A125V15A of MIL-PRF-15160/77 or equivalent.

Short circuit: F77A125V15A of MIL-PRF-15160/77 or equivalent.

Mechanical shock: Method I of MIL-PRF-19207. Momentary opening of indicating circuit contacts permitted.

Terminal strength:

20 pounds (stud terminals).

5 pounds (solder terminal).

Torque: Terminals - 15 inch-pounds.

Salt spray (corrosion): Test condition B.

Part or Identifying Number (PIN): FHL57G-001 for body.
FHL57G-002 for fuse carrier.

Marginal notations are not used in this version to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - SH
Air Force - 11
DLA - CC

Preparing activity
DLA - CC

(Project 5920-0670)

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 70, 71, 99



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.