
INCH-POUND
MIL-F-19207/39B
23 August 1991
SUPERSEDING
MIL-F-19207/39A (SHIPS)
10 April 1974

# MILITARY SPECIFICATION SHEET

## FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL58G

*This specification is approved for use by all departments and agencies of the Department of Defense*

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

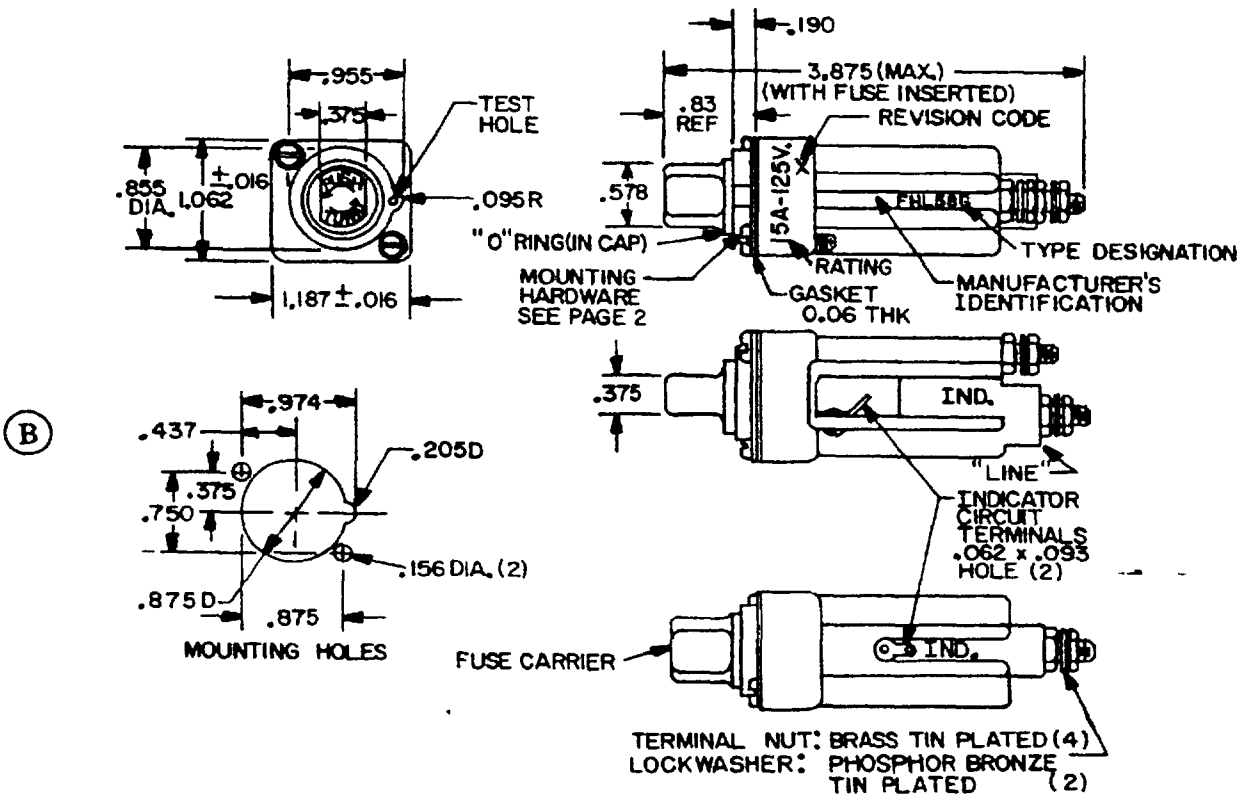


(B)

| Inches | MM | Inches | MM | Inches | MM | Inches | MM |
|---|---|---|---|---|---|---|---|
| 016 | 41 | 156 | 3 96 | 0.578 | 14 68 | 0 955 | 24.26 |
| .06 | 1.52 | 190 | 4.83 | 750 | 19 05 | 974 | 24 74 |
| 062 | 1.57 | .375 | 9.53 | .855 | 21 72 | 1 062 | 26 97 |
| 093 | 2.36 | 437 | 11 10 | .875 | 22.23 | 1 187 | 30 15 |
| .095 | 2.41 | .205 | 5 21 | .83 | 21 08 | 3 875 | 98 43 |

See notes on other page

FIGURE 1 *Type FHL58G fuseholder.*

(B) denotes changes

AMSC N/A

FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches
2. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. (B) Mounting hardware:
   Screw: 6-32UNC-2A Flat head 1.125 inches long (min) (unless otherwise specified)
   Nut: 6-32UNC-2B Square. A threaded metal insert may be used in lieu of nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

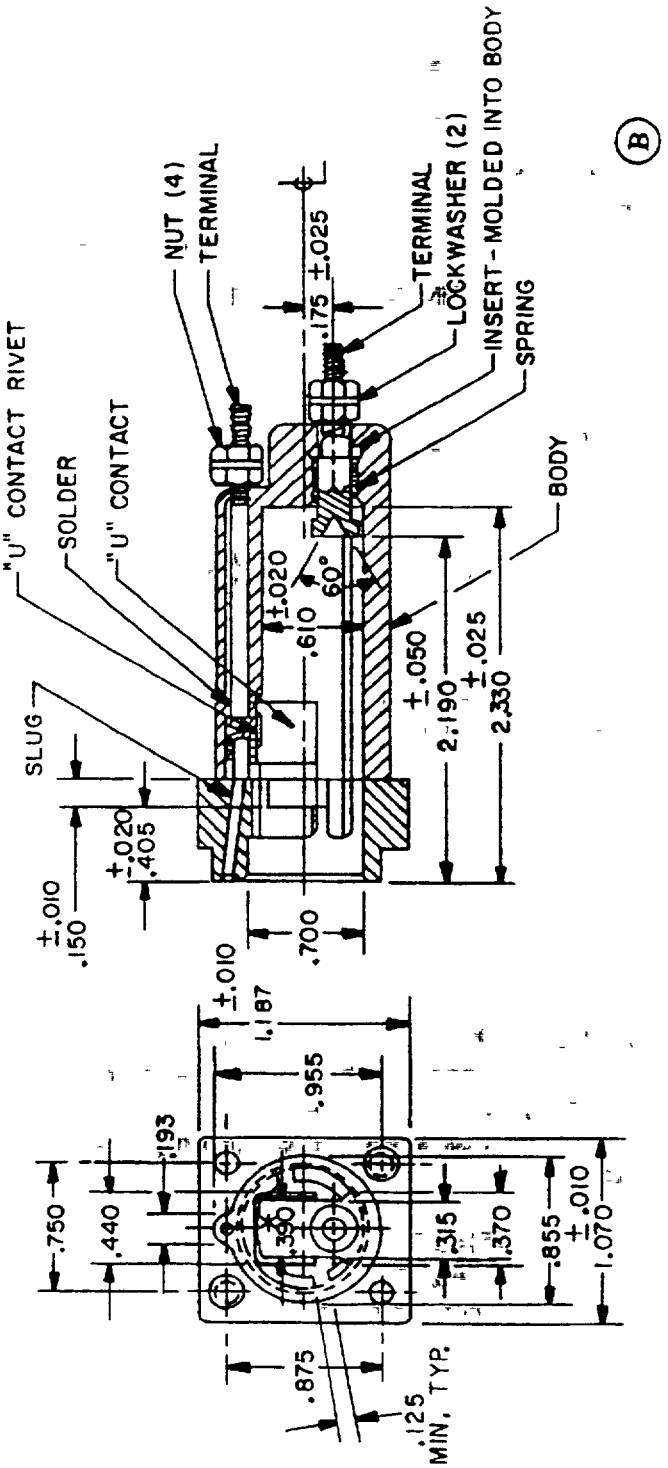



FIGURE 2. *Body for FHL58G fuseholder*

M19207/39-001 - BODY FOR FHL11U58G

FUSE CARRIER FOR M19207/39-001 SHALL BE M19207/38-002

| Inches | MM | Inches | MM | Inches | MM | Inches | MM | Inches | MM |
|---|---|---|---|---|---|---|---|---|---|
| .010 | 0.25 | .150 | 3.81 | .390 | 9.91 | .750 | 19.05 | 1.187 | 30.15 |
| .020 | 0.51 | .175 | 4.45 | .405 | 10.29 | .855 | 21.72 | 2.190 | 55.63 |
| .025 | 0.64 | .193 | 4.90 | .440 | 11.18 | .875 | 22.23 | 2.330 | 59.18 |
| .050 | 1.27 | .315 | 8.00 | .610 | 15.49 | .955 | 24.26 | | |
| .125 | 3.18 | .370 | 9.40 | .700 | 17.78 | 1.070 | 27.18 | | |

*"U" CONTACT DIMENSION

See notes on other page.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

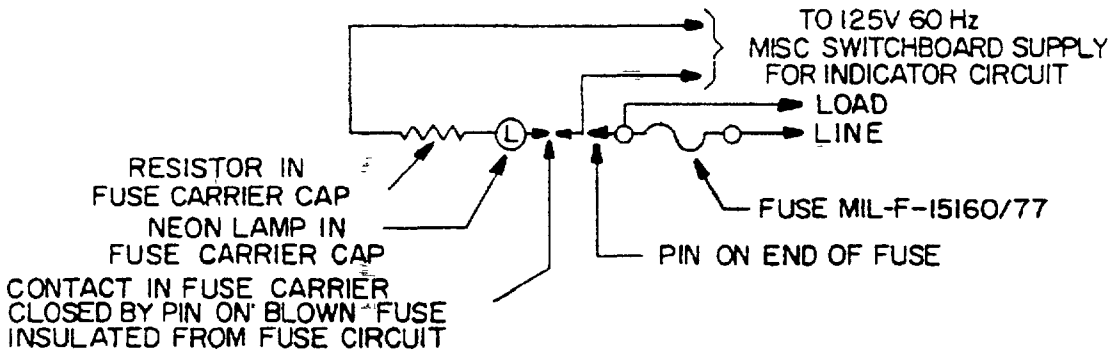



FIGURE 3. *Schematic of FHL58G fuseholder.* (B)

REQUIREMENTS:

Dimensions, configuration, and material: See figures 1 and 2
Body material: MAI-60 or GDI-30F of MIL-M-14, MIL-P-19833
Fuse accommodations:
Ferrule type, alarm indicating:
Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (28.58 mm) length (nominal)
Style fuse: F77 of MIL-F-15160/77
Poles: One
Rating: 15 amperes, 125 volts
Panel thickness: 0 125 (3.18 mm) inch maximum
Indicating: Polycarbonate lens neon lamp
(B) Lamp series resistor: MIL-R-39008/1 or MIL-R-39017/1, 120,000 ohms
Fuse carrier: The spring constant for the switch spring shall be such that a force of 0 56 ounce is required to compress the spring 0.045 inch (1.14 mm)
Terminals: Stud type, No. 8-32UNC-2A thread. Brass, silver platted, or tin plated
Solder type, brass, silver plated
Test fuses:
Temperature rise: F77A125V15A of MIL-F-15160/77
Short circuit: F77A125V15A of MIL-F-15160/77
Mechanical shock: Method I of MIL-F-19207 Momentary opening of indicating circuit contacts permitted
Terminal strength: 20 pounds (stud terminals)
5 pounds (solder terminals)
Torque: Terminals – 15 pounds-inch
Salt spray (corrosion). Test condition B



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19

Preparing activity
Navy – SH
(Project 5920-0459-19)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:36Z
Check the source to verify that this is the current version before use.