[INCH-POUND]
A-A-55568/2
December 8, 1995


COMMERCIAL ITEM DESCRIPTION

HEADSET-MICROPHONE, MONAURAL, LIGHTWEIGHT, INTRA-AURAL, UNAMPLIFIED RECEIVER

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies

1 SCOPE This CID covers the general requirements for monaural, lightweight, intra-aural, unamplified receiver headsets Headsets covered by this CID are intended for commercial/industrial applications

2 CLASSIFICATION This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6 1)

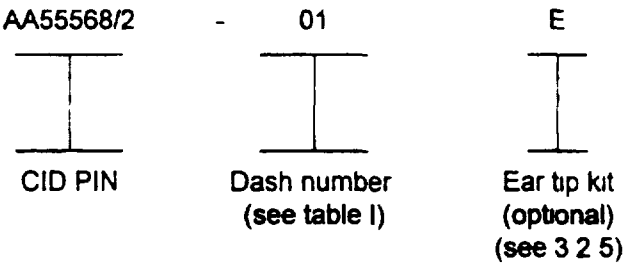

3 SALIENT CHARACTERISTICS

3 1 Design and construction See figures 1 and 2

3 2 Configurations and dimensions Configurations and dimensions shall be as specified on figure 1

3 2 1 Voice tube The headset-microphone shall be supplied with an adjustable acoustic voice tube

3 2 2 Clothing clip The headset-microphone shall be supplied with a clothing clip

3 2 3 Switch The headset-microphone shall be supplied with a lockable/nonlockable push-to-talk switch

3 2 4 Plug termination The plug termination shall be a Western Electric Company part number WE 425 or equivalent configuration

Beneficial comments, recommendations, additions, deletions, clarifications, etc , and any data which may improve this document should be sent to Defense Electronics Supply Center, ATTN DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868

AMSC N/A FSC 5965

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:54Z
Check the source to verify that this is the current version before use.

3 2 5 Ear tip Kit. When specified in the part number, a kit, providing a variety of sizes of ear tips, shall be provided with the headset-microphone

3 3 Wiring diagram The wiring diagram shall be as specified on figure 2

3 4 Cable assemblies The cable assemblies shall be as specified in table I

3 5 Frequency range The frequency range for the headset shall be 300 to 3300 Hz

3 6 Electrical characteristics

3 6 1 Receiver

3 6 1 1 Output level The receiver output level shall be 75 5 ±4 dB SPL (12 6 mV rms through 600 ohms)

3 6 1 2 Distortion Distortion for the headset shall be less than 5 percent

3 6 1 3 Receiver impedance The receiver impedance shall be 600 ohms nominal

3 6 2 Microphone

3 6 2 1 Output level The output level shall be -22 5 dB V ±4 dB V (47 to 119 mV rms)

(NOTE All transmit measurements are made with 94 dB SPL drive at 1000 Hz into a 50 ohm resistive load at 100 mA dc Also 0 dB m = 1 milliwatt, 0 dB SPL = 0002 dynes/cm^2, 0 dB V = 1 volt)

3 6 2 2 DC resistance The dc resistance shall be greater than 35 ohms

3 6 2 3 Terminal voltage Terminal voltage shall be 4 7 V dc at 100 mA

3 6 2 4 Microphone impedance Microphone impedance shall be 50 ohms nominal

3 6 2 5 Polarity The microphone/amplifier shall be nonpolar

3 7 Marking Headsets supplied to this CID shall be marked with the manufacturer's (MFGR) standard commercial PIN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

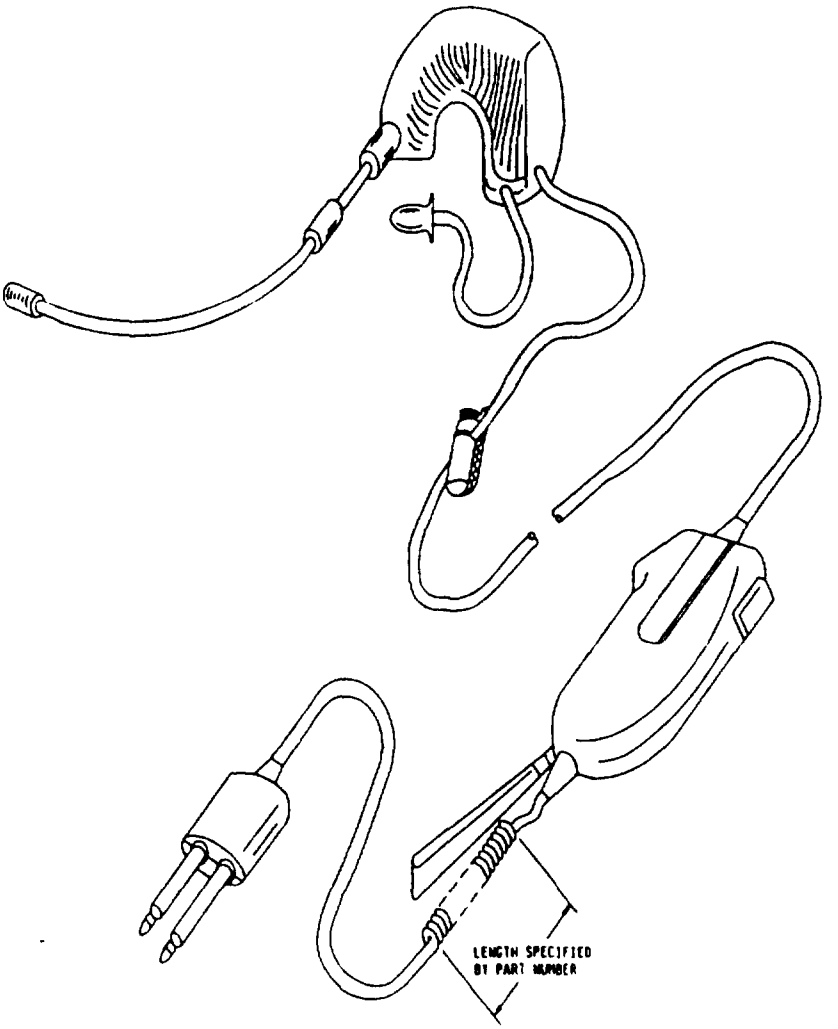


Figure 1 Headset-microphone configurations

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:54Z
Check the source to verify that this is the current version before use.

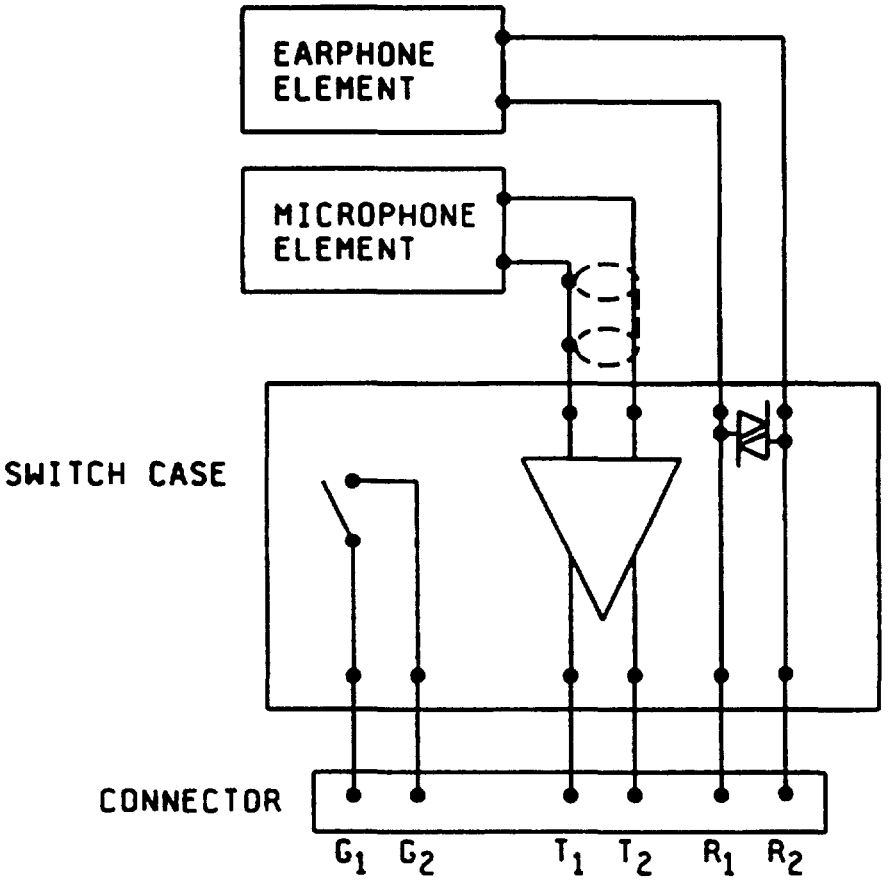


Figure 2 Wiring diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

TABLE I Cable assembly characteristics

AA55568/2-	Characteristics
01	The length of the coiled portion of the connector cable assembly shall be 50 8 centimeters (20 inches) nominal when retracted and 3 05 meters (10 feet) nominal when extended
02	The length of the coiled portion of the connector cable assembly shall be 76 2 centimeters (30 inches) nominal when retracted and 4 57 meters (15 feet) nominal when extended
03	The length of the coiled portion of the connector cable assembly shall be 127 centimeters (50 inches) nominal when retracted and 7 62 meters (25 feet) nominal when extended

4 QUALITY ASSURANCE PROVISIONS Quality assurance provisions shall be as specified in A-A-55568

5 PACKAGING Packaging shall be as specified in A-A-55568

6 NOTES

6 1 PIN The PIN should be used for Government purposes to buy commercial products to this CID See section 2 for PIN format

6 2 CAGE code For ordering purposes, inventory control, and submission of these headset-microphones to DESC under the Military Parts Control (MPCAG) evaluation program, CAGE code 58536 should be used

6 3 Source of documents

Commercial Item Description

A-A-55568 - Headset-microphone, Lightweight, General Requirements for

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094)

6 4 Ordering data Ordering data shall be as specified in A-A-55568

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:54Z
Check the source to verify that this is the current version before use.

6 5 Commercial products As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID (NOTE This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown)

MFGR's CAGE	MFGR's name and address
22447	Plantronics, Inc 345 Encinal St Santa Cruz, CA 95060 (408) 426-5858

6 6 Part number (P/N) supersession data This CID supersedes the following manufacturer's P/Ns as shown This information is being provided to assist in reducing proliferation in the government inventory system When indicated in the part number (i e AA55568/2-01E, etc), an ear tip kit of the part number shown will also be provided

Dash number (see table I) AA55568/2-	MFGR CAGE	MFGR Headset P/N 1/	MFGR Ear tip kit P/N 1/
01	22447	HSB311-1	N/A
01E	22447	HSB311-1	06448-00
02	22447	HSB311-2	N/A
02E	22447	HSB311-2	06448-00
03	22447	HSB311-3	N/A
03	22447	HSB311-3	06448-00

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown

6 7 Government users To acquire information on obtaining these headset-microphones from the Government inventory system, contact Defense Electronics Supply Center, ATTN DESC-EOC, 1507 Wilmington Pike, Dayton, OH 45444-5520, or telephone (513) 296-8663

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:54Z
Check the source to verify that this is the currentversion before use.

6 7 1 NSNs The following is a list of NSNs assigned which correspond to this CID The list is for information only and may not be indicative of all possible NSNs associated with the CID For up to date information on assigned NSNs, please contact the Defense Electronics Supply Center, ATTN DESC-EOC, 1507 Wilmington Pike, Dayton, OH 45444-5520, or telephone (513) 296-8663

Dash number (see table I) AA55568/2-	NSN
01	5965-01-371-8031
02	5965-01-406-6320
03	5965-01-406-6056

MILITARY INTERESTS

Custodians

Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

Preparing Activity

DLA - ES

Project 5965-0236-02

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:54Z
Check the source to verify that this is the currentversion before use.