INCH - POUND

A-A-56029
10 September 1993

COMMERCIAL ITEM DESCRIPTION

MOLDING MATERIAL, SHEET, FIBER REINFORCED

The General Services Administration has authorized the use of this Commercial Item Description.

Abstract. This commercial item description establishes requirements for a fiber reinforced sheet molding material used to mold structural hardware.

Salient characteristics. The uncured material shall be homogeneous and free of foreign material that would adversely affect its intended purpose. It shall be capable of storage for a minimum of six months in its original unopened container at -18º Celsius (C) or less and still satisfy all requirements of table I when cured.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, AL 35898-5270.

AMSC N/A FSC 9330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.

TABLE I. Salient characteristics.

Property	Requirement	Test Document
Tensile strength, kip/in^2	30 minimum	ASTM D 638
Flexural strength, kip/in^2	63 minimum	ASTM D 790 Method I Procedure A
Flexural modulus, kip/in^2	2500 - 3000	ASTM D 790 Method I, Procedure A
Compression strength, kip/in^2	22 minimum	ASTM D 695
Compression modulus, kip/in^2	1900 minimum	ASTM D 695
Impact strength, ft-lbs/inch	30 minimum	ASTM D 256 Method A
Bearing strength, kip/in^2	37 minimum	ASTM D 953
Shear strength, kip/in^2	25 minimum	Iosipescu Shear Test
Specific gravity	1.85 maximum	ASTM D 792 Method A-1
Total mass loss (TML), %	1 maximum	ASTM E 595
Collected volatile condensable material (CVCM), %	0.1 maximum	ASTM E 595
Fatigue strength, kip/in^2 @ 10^7 cycles	9 minimum	ASTM D 671

Shear strength. Use the Iosipescu Method for testing shear strength.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of
ASTM E 380, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials IAW Public Law 94-580 to the maximum extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

CID-based part identification number. The following part identification number procedure is for government purposes and does not constitute a requirement for the contractor.

Example of part identification number AXXXXX:

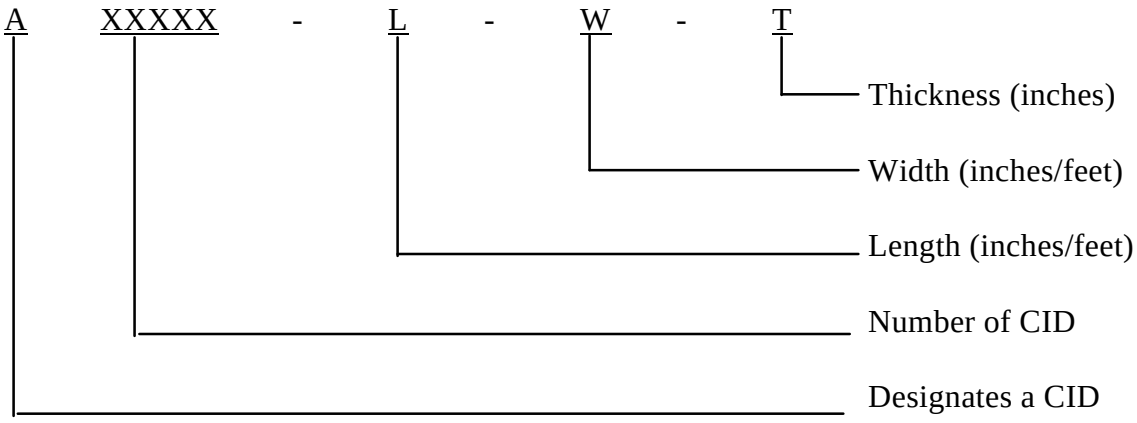

Notes:

a. Source for referenced documents. Applications for copies of referenced ASTMs should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

b. Source of supply. This product is currently available commercially as shown below:

Vendor	Part number
Quantum Composites, Inc. 4702 James Savage Road Midland, MI 48640-5833 CAGE Code 2V357	Lytex 9063

c. Test fixtures for performing the shear strength test, Iosipescu Method, are available for Wyoming Test Fixture, Inc., 421 S. 19th Street, Laramie, Wyoming 82070.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:
Activity:

Custodian:
Army - MI
Navy - AS
Air Force - 99

Review Activity:
Army - MR
Air Force - 84

Civil Agency Coordinating

GSA - FSS (7 FXE)

Preparing Activity:
Army - MI

Project No. 9330 - 1289

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.