
MILITARY SPECIFICATION SHEET


Ⓐ CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (BAYONET COUPLING, PREWIRED, SOCKET CONTACT), (SERIES I, CLASSES A, G, AND R (SHELL SIZE 8 FOR INSERTS 8-2, 8-3, AND 8-4 ONLY))

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓐ The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-26482.

Ⓐ INACTIVE. NO SUPERSEDING DOCUMENT.

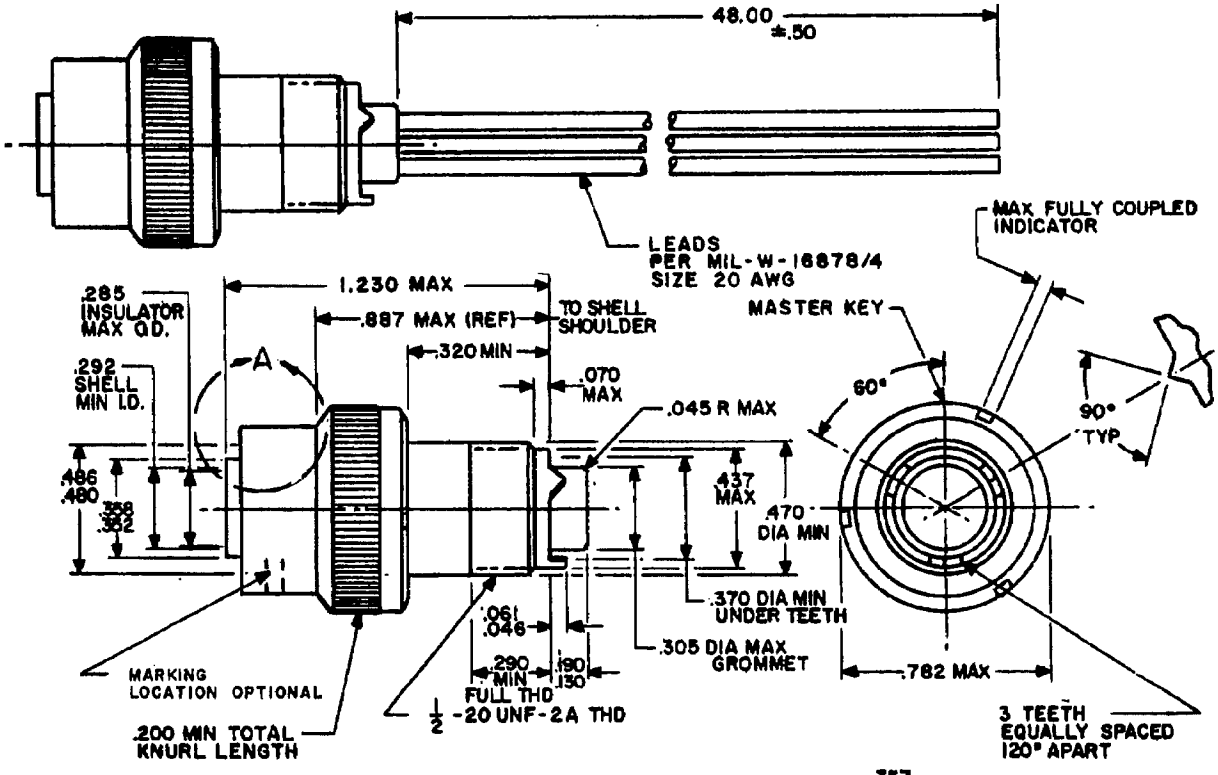

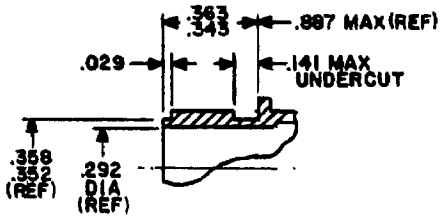

SHELL DETAIL


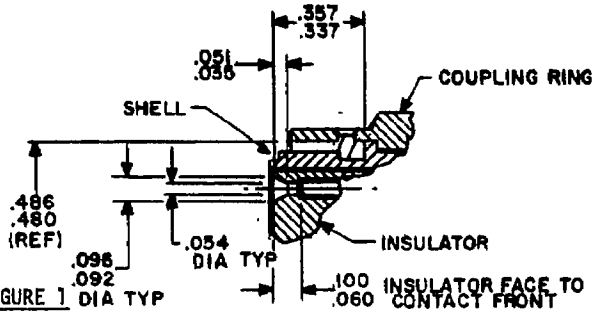


FIGURE 1 DETAIL A

Ⓐ denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

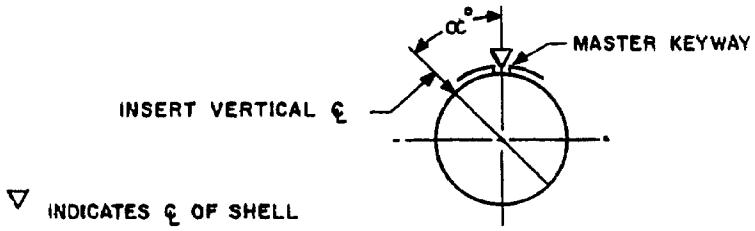


INSERT POSITION

(AS VIEWED FROM ENGAGING END)

FIGURE 2

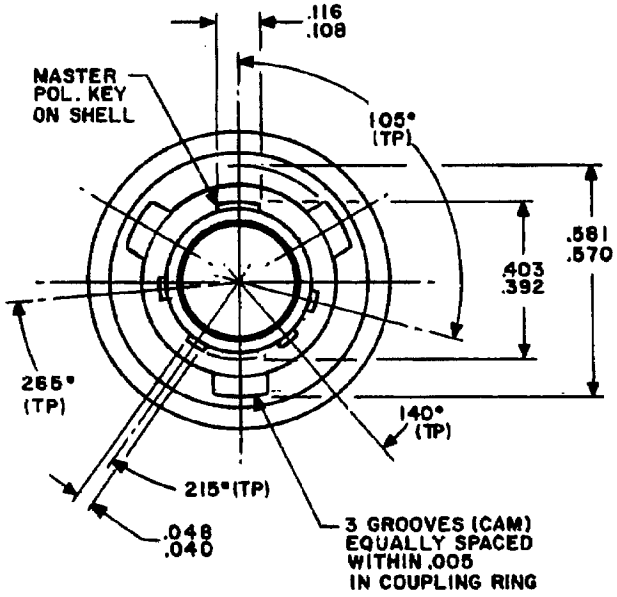


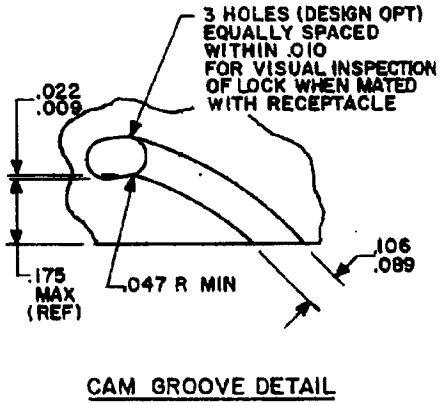


CAM GROOVE DETAIL

FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.




ASSEMBLED TO STRAIGHT BACKSHELL LESS STRAIN RELIEF




ASSEMBLED TO STRAIGHT BACKSHELL WITH STRAIN RELIEF

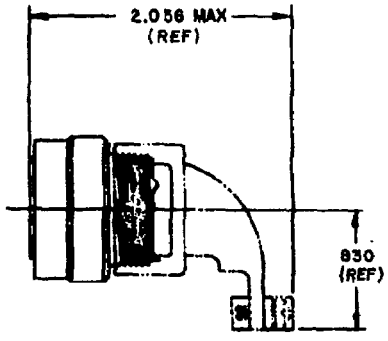


ASSEMBLED TO 90° BACKSHELL WITH STRAIN RELIEF

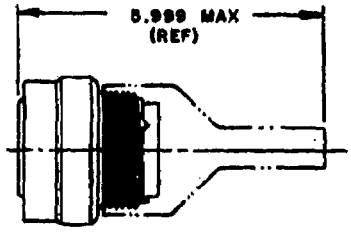

ASSEMBLED TO BACKSHELL WITH STRAIGHT SHRINK STRAIN RELIEF

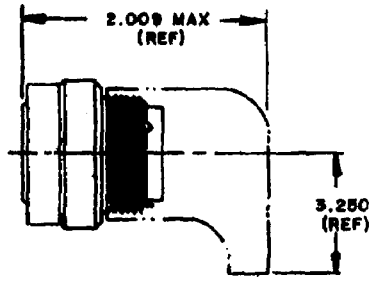

ASSEMBLED TO BACKSHELL WITH 90° SHRINK STRAIN RELIEF

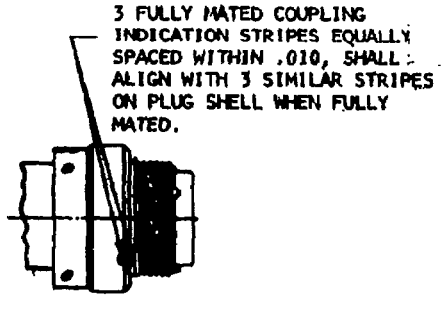

COUPLED POSITION

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

NOTES:

1. For alternate polarizing positions, the connector insert is rotated in respect to the shell.
2. In "Normal Position" (Position "N") the insert vertical center line coincides with the center line of the master key of the shell.
3. In "Alternate Positions" (Positions "W", "X", "Y", and "Z") the socket insert is rotated 00 degrees clockwise relative to centerline of the master key of the shell.
4. Fully mated coupling indication stripes and polarization stripes shall be color coded blue. Stripes shall have minimum width of .050 on coupling ring and minimum width of .040 on the shell.
5. Four keys (MMC) and insert shall be located within .0035 either side of (TP) relative to master key (MMC) and shell O. D. (MMC).
6. Dimensions in inches. Unless otherwise specified, tolerence shall be .XX ±.010 and .XXX ±.005, angular X° ±1° - 0' and X° ±30'.
Ⓐ 7. Contacts in this connector are nonremovable.

REQUIREMENTS:

Dimensions and configuration: See figures.

This connector mates with MIL-C-83723/38 and /40.

Ⓐ For insert arrangements see MIL-STD-1669.

Rear hardware must be used per MIL-C-83723/15, /16(USAF).

Contacts and leads shall be furnished in assembled configuration.


Connector assembly must include a backshell to meet moisture sealing requirements.

Ⓐ Shell material: Classes A and R - Aluminum alloy per QQ-A-367.
Class G - Corrosion resistant steel per QQ-S-763.

Ⓐ Circumferential color bands specified in MIL-C-26482 do not apply.

Connector identification marking specified in MIL-C-26482 does not apply. Marking shall be as specified in the part number below.

Part number example:

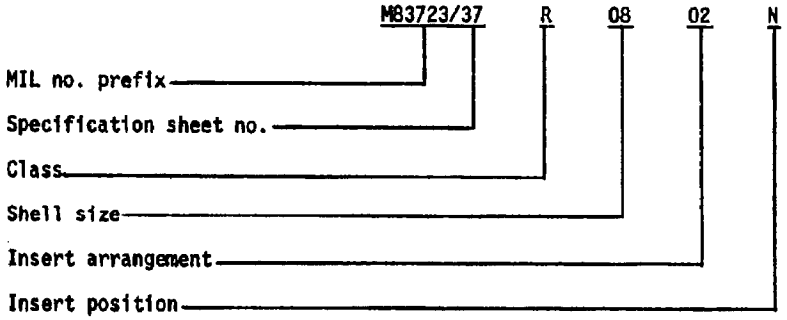

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 17, 70, 71, 80, 82, 84
DSA - ES

Preparing activity:
Air Force - 85

(Project 5935-F964-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.