INCH-POUND

MIL-DTL-83723/61F
w/AMENDMENT 1
26 August 2010
SUPERSEDING
MIL-DTL-83723/61F
29 June 2009

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), DUMMY CONNECTORS, RECEPTACLES, (FOR MIL-DTL-26500 AND MIL-DTL-83723, SERIES III, CLASSES A, M, R, T, W AND Z)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

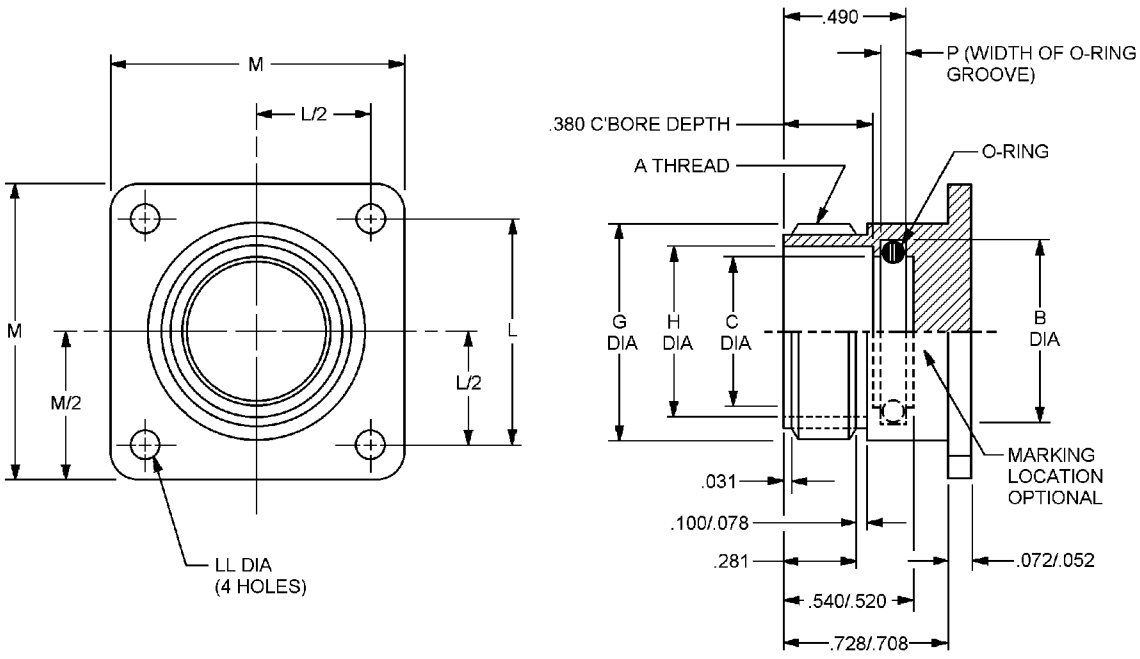


FIGURE 1. Dummy connector, receptacle, threaded coupling M83723/61-1.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.078	1.98	.520	13.21
.009	0.23	.100	2.54	.540	13.72
.031	0.79	.281	7.14	.708	17.98
.052	1.32	.380	9.65	.728	16.49
.072	1.83	.490	12.45		

Shell size	A UNEF-2A coupling thread	B dia ± .005	C dia +.005 -.000	G dia max	H dia +.005- .000	L CL –CL +.000 - .009	LL dia mtg hole +.000 -.009	M length side	P +.000 -.005
8	.5625-24	.505 (12.83)	.428 (10.87)	.561 (14.25)	.475 (12.07)	.594 (15.09)	.125 (3.18)	.812 (20.62)	.076 (1.93)
10	.6875-24	.636 (16.15)	.530 (13.46)	.696 (17.68)	.576 (14.63)	.719 (18.26)	.125 (3.18)	.937 (23.80)	.089 (2.26)
12	.8750-20	.806 (20.47)	.700 (17.78)	.875 (22.23)	.746 (18.95)	.812 (20.62)	.125 (3.18)	1.031 (26.19)	.089 (2.26)
14	.9375-20	.875 (22.23)	.769 (19.53)	.935 (23.75)	.815 (20.70)	.906 (23.01)	.125 (3.18)	1.125 (28.58)	.089 (2.26)
16	1.0625-18	1.002 (25.45)	.896 (22.76)	1.062 (26.97)	.942 (23.93)	.969 (24.61)	.125 (3.18)	1.250 (31.75)	.089 (2.26)
18	1.1875-18	1.108 (28.14)	1.002 (25.45)	1.187 (30.15)	1.048 (26.62)	1.062 (26.97)	.125 (3.18)	1.343 (34.11)	.089 (2.26)
20	1.3125-18	1.233 (31.32)	1.127 (28.63)	1.312 (33.32)	1.171 (29.74)	1.156 (29.36)	.125 (3.18)	1.437 (36.50)	.089 (2.26)
22	1.4375-18	1.358 (34.49)	1.252 (31.80)	1.437 (36.50)	1.297 (32.94)	1.250 (31.75)	.125 (3.18)	1.562 (39.67)	.089 (2.26)
24	1.5625-18	1.483 (37.67)	1.377 (34.98)	1.562 (39.67)	1.420 (36.07)	1.375 (34.93)	.154 (3.91)	1.703 (43.26)	.089 (2.26)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances shall be ± .005 (0.13 mm) for three place decimals.
5. These parts are intended for use as dummy stowage receptacles for MIL-DTL-83723, series III, and MIL-DTL-26500 threaded coupling connector plugs.

FIGURE 1. Dummy, receptacles, threaded coupling M83723/61-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

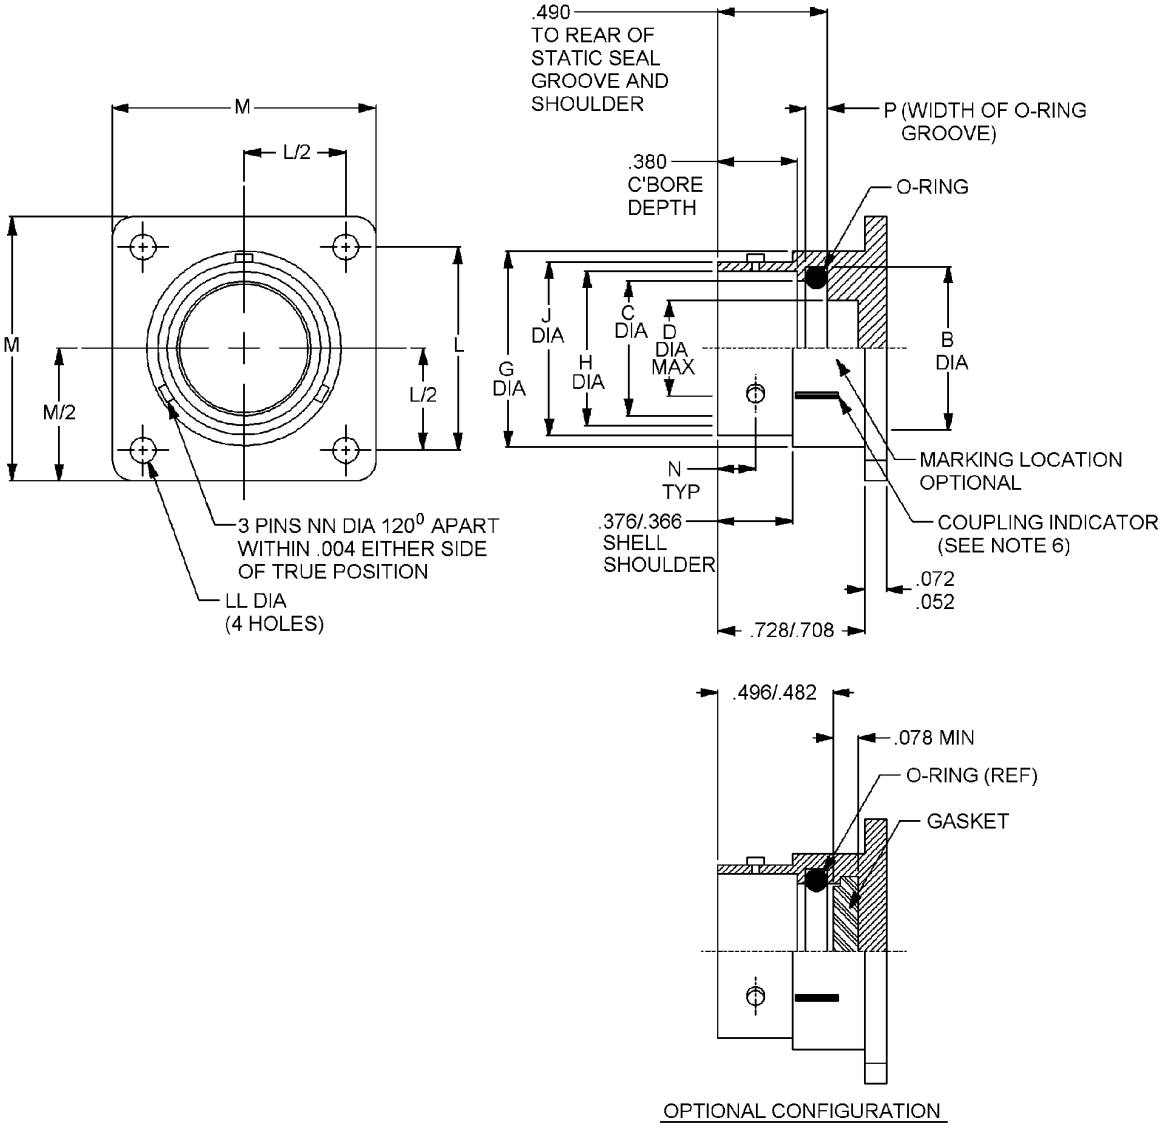


FIGURE 2. Dummy, receptacles, bayonet coupling M83723/61-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.072	1.83	.482	12.24	.708	17.98
.004	0.10	.078	1.98	.490	12.45	.728	18.49
.005	0.13	.366	9.30	.496	12.60		
.009	0.23	.376	9.55	.540	13.72		
.052	1.32	.380	9.65	.560	14.22		

Shell size	B dia min ± .005	C dia + .005 - .000	D dia max	G dia max	H dia min	J dia + .005 - .000	L CL – CL mounting hole
8	.508 (12.90)	.428 (10.87)	.352 (8.94)	.561 (14.25)	.475 (12.07)	.536 (13.61)	.594 (15.09)
10	.636 (16.15)	.530 (13.46)	.428 (10.87)	.696 (17.68)	.576 (14.63)	.659 (16.74)	.719 (18.26)
12	.806 (20.47)	.700 (17.78)	.598 (15.19)	.875 (22.23)	.746 (18.95)	.829 (21.06)	.812 (20.62)
14	.875 (22.23)	.769 (19.53)	.667 (16.94)	.935 (23.75)	.815 (20.70)	.898 (22.81)	.906 (23.01)
16	1.002 (25.45)	.869 (22.07)	.794 (20.17)	1.062 (26.97)	.942 (23.93)	1.025 (26.04)	.969 (24.61)
18	1.108 (28.14)	1.002 (25.45)	.900 (22.86)	1.187 (30.15)	1.048 (26.62)	1.131 (28.73)	1.062 (26.97)
20	1.233 (31.32)	1.127 (28.63)	1.025 (26.04)	1.312 (33.32)	1.171 (29.74)	1.256 (31.90)	1.156 (29.36)
22	1.358 (34.49)	1.252 (31.80)	1.150 (29.21)	1.437 (36.50)	1.297 (32.94)	1.381 (35.08)	1.250 (31.75)
24	1.483 (37.67)	1.377 (34.98)	1.275 (32.39)	1.562 (39.67)	1.420 (36.07)	1.506 (38.25)	1.375 (34.93)

FIGURE 2. Dummy, receptacles, bayonet coupling M83723/61-2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Shell size	LL dia mounting hole +.000 / - .009	M length side	N +.000 -.004	NN +.000 -.003	P +.000 -.005
8	.125 (3.18)	.812 (20.62)	.101 (2.57)	.078 (1.98)	.076 (1.93)
10	.125 (3.18)	.937 (23.80)	.094 (2.39)	.093 (2.36)	.089 (2.26)
12	.125 (3.18)	1.031 (26.19)	.094 (2.39)	.093 (2.36)	.089 (2.26)
14	.125 (3.18)	1.125 (28.58)	.094 (2.39)	.093 (2.36)	.089 (2.26)
16	.125 (3.18)	1.250 (31.75)	.094 (2.39)	.093 (2.36)	.089 (2.26)
18	.125 (3.18)	1.343 (34.11)	.094 (2.39)	.093 (2.36)	.089 (2.26)
20	.125 (3.18)	1.437 (36.50)	.094 (2.39)	.093 (2.36)	.089 (2.26)
22	.125 (3.18)	1.562 (39.67)	.094 (2.39)	.093 (2.36)	.089 (2.26)
24	.154 (3.91)	1.703 (43.26)	.094 (2.39)	.093 (2.36)	.089 (2.26)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances shall be ± .005 (0.13 mm) for three place decimals.
5. These parts are intended for use as dummy stowage receptacles for MIL-DTL-83723, series III, and MIL-DTL-26500 bayonet coupled connector plugs.
6. Coupling assurance indicator shall be provided in accordance with MIL-DTL-83723.

FIGURE 2. Dummy, receptacles, bayonet coupling M83723/61-2 - Continued.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Materials:

Shell – Impact extruded or machined aluminum alloy.
Gasket - silicone or fluorosilicone elastomer.
O-ring – silicone elastomer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Gasket shall be bonded to or mechanically retained in receptacle.
All diameters shall be concentric with each other within .015 (0.38mm) TIR.
All diameters in the same plane shall be concentric with each other within .004 (0.10mm) TIR.
Coupling assurance indicator shall be provided in accordance with MIL-DTL-83723.


Qualification:

Examination of product.
Coupling torque.
Humidity.
Salt spray (corrosion).

Marking:

Part or Identifying Number (PIN): M83723/61 – X (where “X” represents the dash number from figure 1 or 2), shell size, and the applicable code for finish.

PIN example:

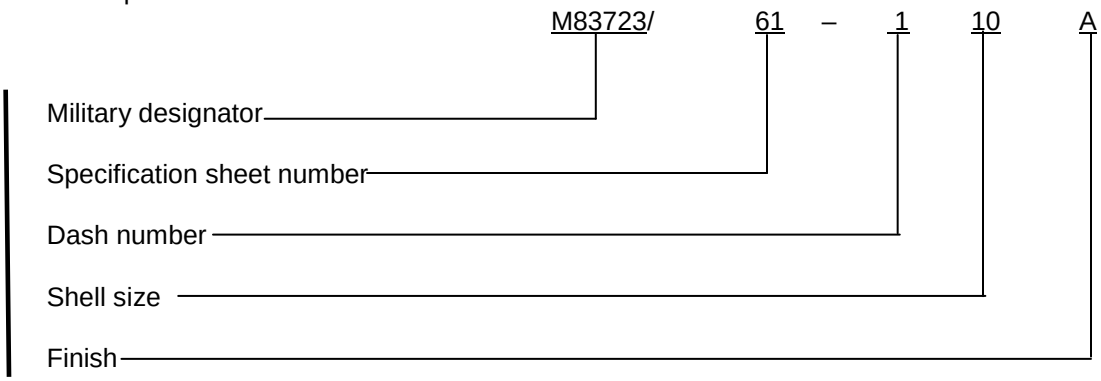

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Supersession data: See table I.

TABLE I. Supersession data.

Superseding PIN M83723/61-1	Superseded PIN MS27296
8AR	7
10AR	1
12AR	2
14AR	3
16AR	4
18AR	5
20AR	8
22AR	6
24AR	9
Superseding PIN M83723/61-2	Superseded PIN MS27297
8AR	7
10AR	1
12AR	2
14AR	3
16AR	4
18AR	5
20AR	8
22AR	6
24AR	9

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-DTL-26500

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force – 19, 99

(Project 5935-2010-154)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.