INCH-POUND

MIL-DTL-83723/86E
w/AMENDMENT 1
28 November 2017
SUPERSEDING
MIL-DTL-83723/86E
1 October 2009

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, ENVIRONMENT RESISTING, PLUG, THREADED COUPLING, CRIMP SOCKET CONTACT, SERIES III, CLASSES A, G, K, M, R, T, W AND Z

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

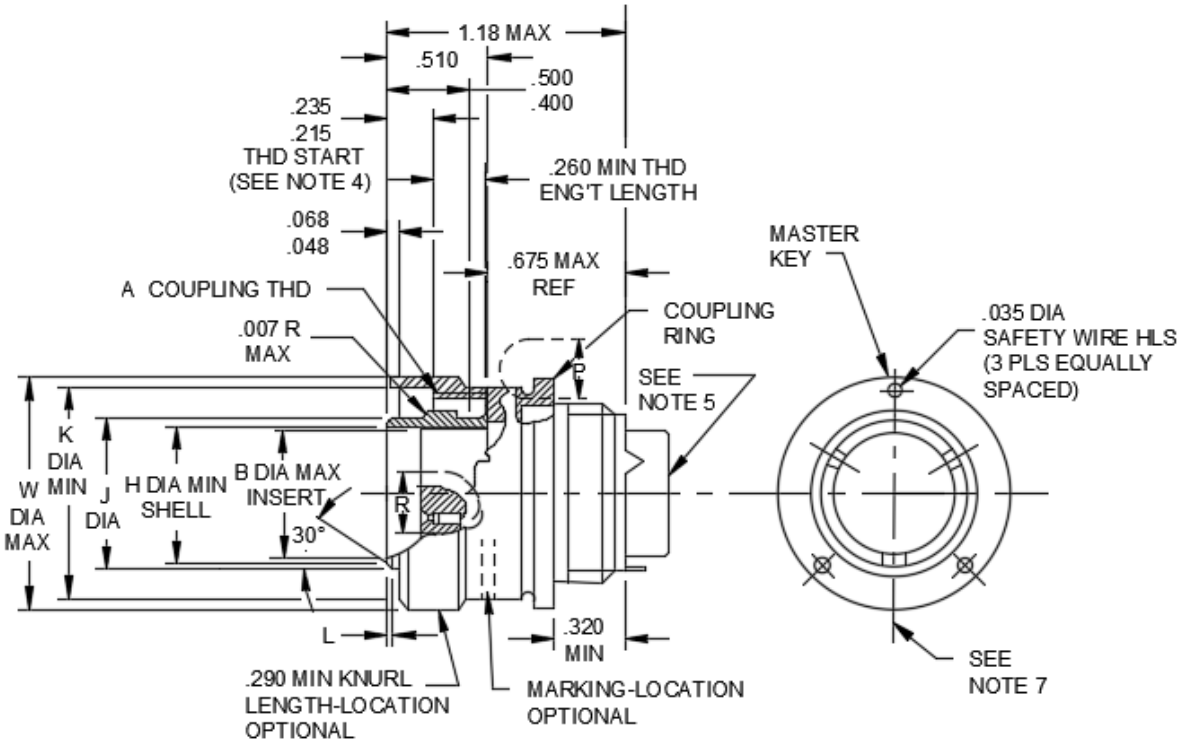


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

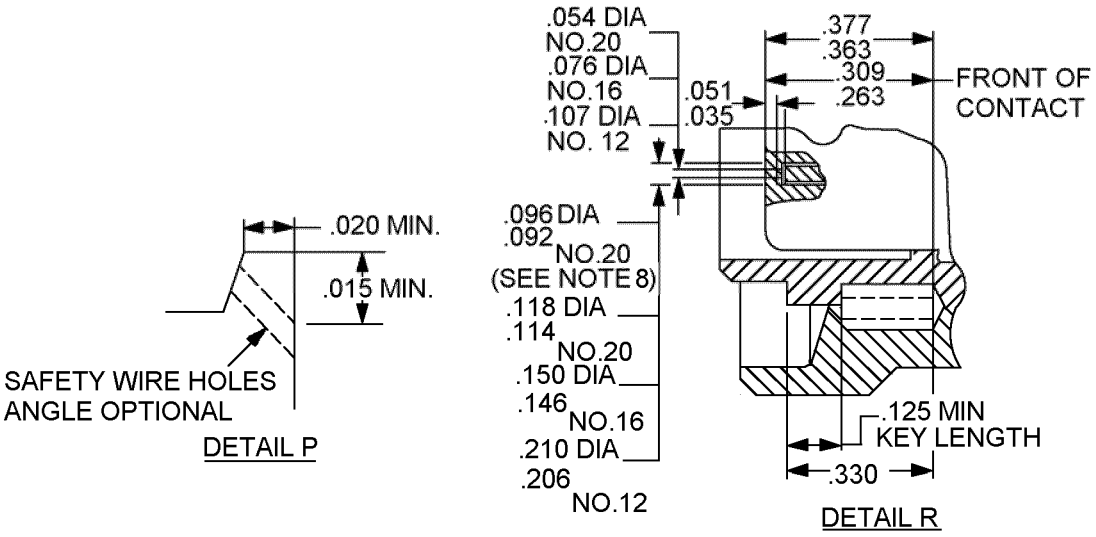


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Shell size	A Thread UNEF-2B	B	H	J	K dia min	L	W dia max
8	.5625-24	.290 (7.37)	.294 (7.47)	.405 (10.29) .396 (10.06)	.575 (14.61)	.025 (.64)	.776 (19.71)
10	.6875-24	.388 (9.86)	.428 (10.87)	.526 (13.36) .517 (13.13)	.707 (17.96)	.031 (.79)	.908 (23.06)
12	.875-20	.558 (14.17)	.598 (15.19)	.696 (17.68) .687 (17.45)	.895 (22.73)		1.080 (27.43)
14	.9375-20	.627 (15.93)	.667 (16.94)	.765 (19.43) .756 (19.20)	.957 (24.31)		1.143 (29.03)
16	1.0625-18	.772 (19.61)	.794 (20.17)	.892 (22.66) .883 (22.43)	1.084 (27.53)		1.268 (32.21)
18	1.1875-18	.860 (21.84)	.900 (22.86)	.998 (25.35) .989 (25.12)	1.209 (30.71)		1.377 (34.98)
20	1.3125-18	.985 (25.02)	1.025 (26.04)	1.123 (28.52) 1.114 (28.30)	1.334 (33.88)		1.512 (38.40)
22	1.4375-18	1.110 (28.19)	1.150 (29.21)	1.248 (31.70) 1.239 (31.47)	1.459 (37.06)		1.627 (41.33)
24	1.5625-18	1.235 (31.37)	1.275 (32.39)	1.373 (34.87) 1.364 (34.65)	1.584 (40.23)		1.762 (44.75)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.290	7.37	.707	17.96	1.114	28.29
.007	0.18	.294	7.47	.756	19.20	1.123	28.52
.025	0.64	.309	7.85	.765	19.43	1.150	29.21
.031	0.79	.330	8.38	.772	19.61	1.180	29.97
.035	0.89	.366	9.30	.794	20.17	1.1875	30.16
.048	1.22	.377	9.58	.832	21.13	1.209	30.71
.051	1.30	.388	9.86	.860	21.84	1.235	31.37
.054	1.37	.396	10.05	.875	22.23	1.236	31.39
.068	1.73	.400	10.16	.880	22.35	1.239	31.47
.076	1.93	.405	10.29	.883	22.43	1.248	31.70
.092	2.34	.428	10.87	.892	22.66	1.275	32.39
.096	2.44	.500	12.70	.895	22.73	1.334	33.88
.107	2.71	.510	12.95	.900	22.86	1.360	34.54
.114	2.90	.517	13.13	.9375	23.81	1.364	34.65
.118	3.00	.526	13.36	.957	24.31	1.373	34.87
.125	3.18	.528	14.71	.959	24.36	1.4375	36.51
.146	3.71	.5625	14.29	.985	25.02	1.459	37.06
.150	3.81	.575	14.60	.989	25.12	1.5625	39.69
.206	5.23	.598	15.19	.998	25.35	1.584	40.23
.210	5.33	.627	15.93	1.025	26.03	1.586	40.28
.215	5.46	.667	16.94	1.0625	26.99	1.703	43.26
.235	5.97	.675	17.15	1.084	27.53	1.846	46.89
.260	6.60	.6875	17.46	1.097	27.86		
.263	6.68	.696	17.68	1.110	28.19		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ± 1° for all angles.
4. The dimensions showing the relationship between the coupling ring and shell apply only when the coupling ring is in the fully forward position.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.
6. Shell size 8 will not mate with MIL-DTL-26500 connectors.
7. The centerline of indicated projection must be located on vertical centerline ± 2.0°.
8. See table I for contact cavities requiring this dimension.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This connector mates with MIL-DTL-83723/83, MIL-DTL-83723/85, MIL-DTL-83723/88, MIL-DTL-83723/89 and MIL-DTL-83723/90.


Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	03	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

Connector accessories: See SAE-AS85049.

Part or Identifying Number (PIN) example:

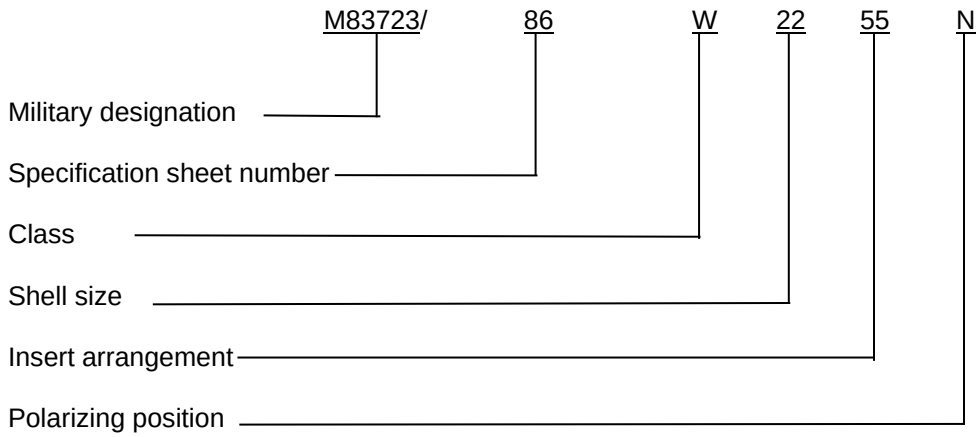

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-STD-1554
MIL-DTL-26500
MIL-DTL-83723/83
MIL-DTL-83723/85
MIL-DTL-83723/88
MIL-DTL-83723/89
MIL-DTL-83723/90
SAE-AS85049

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-2017-153)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.