

MILITARY SPECIFICATION SHEET

CHOPPERS, ELECTROMECHANICAL, HERMETICALLY SEALED, SINGLE POLE, DOUBLE THROW, BREAK BEFORE MAKE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the chopper described herein shall consist of this specification and the latest issue of MIL-C-83729.

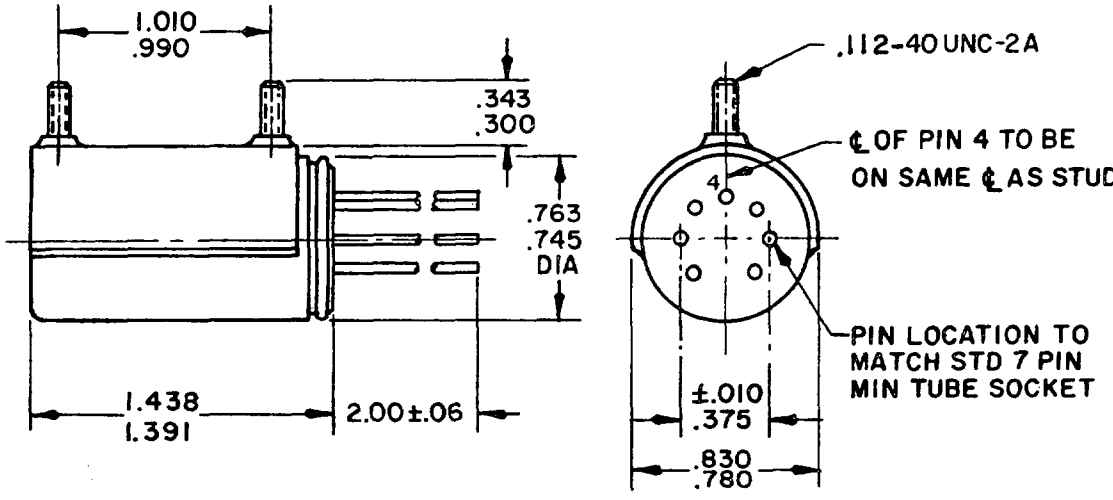



SCHEMATIC DIAGRAM

INCHES	MM	INCHES	MM
.010	.25	.780	19.81
.06	1.52	.830	21.08
.300	7.62	.990	25.15
.343	8.71	1.010	25.65
.375	9.53	1.391	35.33
.745	18.92	1.438	36.53
.763	19.38	2.00	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.02 (.51 mm) for two place decimals.
Ⓐ 4. When coil is de-energized center reed may be in any of 3 positions.

FIGURE 1. Outline drawing, terminal arrangement and schematic diagram.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Contacts:

Single pole, double throw, break before made.

Polarity: With positive voltage on pin 3 and negative voltage on pin 4, pins 6 and 7 will close.

Voltage and current: Dry circuit to 2 milliamperes @ 10.0 V dc (maximum intermittent rating). 10 Volts @ 1 milliampere continuous rating maximum.

Coil data at 25°C:

Voltage rated: 5.7 to 6.9 volts rms.

Resistance: 155 ohms ±10%.

Impedance: 153 to 197 ohms.

Frequency range: 57 to 63 Hz.

Waveform characteristics (at 25°C):

Dwell time - 167° ±10°.

Dissymmetry - 15 degrees maximum.

Transfer time - 3 degrees minimum.

Phase angle - 20° ±5° electrical degrees.

Noise level: 50 microvolts rms maximum, above system noise, between each contact and ground, across 1.0 megohm with the chopper operating.

Environmental conditions:

Dielectric withstanding voltage: 145 volts, rms, 60 Hz or 200 volts dc for 60 seconds.

Insulation resistance: 100 megohms minimum between contacts and ground and 10 megohms minimum for drive coil to ground.

Vibration I: 10 to 55 Hz @ 0.060 inches maximum, double amplitude, (nonoperating).

Shock: 100G per MIL-STD-202, method 213, test condition I, nonoperating.

Temperature range: -65°C to +100°C.

Life: 2,000 hours, dry circuit @ 25° ±5°C.

Mechanical:

Weight: .094 pound, maximum.

Dimensions: See figure 1.

Enclosure: Hermetically sealed, material, brass, deep drawn, grey enamel finish over zinc chromate primer.

Header: 7 pin minature, pins 1, 3, 4, 6, and 7 to be copper, compression glass bead insulators.

Terminals: Wire leads.

Mounting position: Any.

Part number: M83729/4-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:31Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AT, AV, ER, MI, SL
Navy - AS, OS
Air Force - 11, 17
DLA - ES

User activities:
Army - ME, WC
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5945-0643-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:31Z
Check the source to verify that this is the current version before use.