MILITARY SPECIFICATION

AMPLIFIER, ELECTRONIC CONTROL ASU-3/A

This amendment forms a part of MIL-A-26360B(USAF), dated 21 July 82, and is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

2.1.1.
Under SPECIFICATIONS, Military, delete "MIL-S-6872."

Delete address on line 3 of beneficial comments block and add: "Oklahoma City Air Logistics Center/MMEDO, Tinker AFB, OK 73145-5990."

PAGE 2

Under STANDARDS, Military, add: "DOD-STD-1866 Soldering process General (Non Electrical)(Metric)."

* Add:
"2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

ASTM D3951 Packaging, Commercial

(Application for copies should be addressed to: ASTM, 1916 Race St, Philadelphia, PA 19103.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)"

Add:
"3.3.2.1 Recovered materials. Recovered materials shall be used to the maximum extent possible without jeopardizing the end use of the item."

PAGE 3

Add Figure 1 immediately following paragraph 3.4.1 Figure 1 Forms page 4 of the amendment.

PAGE 5

3.9. Line 2 delete "MIL-S-6872" and add: "DOD-STD-1866."

PAGE 12

Delete Section 5 in its entirety and add:

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-20T09:29Z
Check the source to verify that this is the current version before use.

"5. PACKAGING.

5.1 Preservation-packaging. Preservation-packaging shall be level A, C or Industrial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning. Amplifier shall be cleaned in accordance with C-1 of MIL-P-116.

5.1.1.3 Preservation application. Not applicable.

5.1.1.4 Unit packaging. Unless otherwise specified by the contracting activity, each amplifier shall be packaged in quantity unit packs of one each in accordance with Method 1C1 of MIL-P-116. Overbox completed pack in PPP-B-636 container. Apply sufficient cushioning material between bag and unit container of a type, density, and thickness to insure shock transmission does not exceed peak values in G's established for the amplifier when completed packs are subjected to the rough handling drop tests of MIL-P-116.

5.1.2 Level C. Amplifier shall be clean, dry, and individually packaged in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from supply source to the first receiving activity.

5.1.3 Industrial. The Industrial preservation of amplifier shall be in accordance with ASTM D3951.

5.2 Packing. Packing shall be level A, B, C, or Industrial as specified (see 6.2).

5.2.1 Level A. Amplifiers packaged as specified in 5.1.1. shall be packed in shipping containers conforming to PPP-B-601, Styles A or B, Class overseas, unless otherwise specified by the contracting activity. Insofar as practical, exterior shipping containers shall be of uniform shape, size minimum tare and cube consistent with the protection required.

5.2.2 Level B. Amplifiers packaged as specified in 5.1.1 shall be packed in shipping containers conforming to PPP-B-636, class weather-resistant, unless otherwise specified by the contracting activity. Other requirements as specified in 5.2.1 apply.

5.2.3 Level C. Packing shall be applied which affords adequate protection during domestic shipment from the supply source to the first receiving activity for immediate use. This level shall conform to applicable carrier rules and regulations.

5.2.4 Industrial. The packaged amplifier shall be packed in accordance with ASTM D3951.

5.3 Marking. In addition to any other markings required by the contract or order (see 6.2), interior and exterior containers shall be marked in accordance with MIL-STD-129."

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:29Z
Check the source to verify that this is the current version before use.


Delete "6.3"

Custodian:
Air Force-99

Preparing Activity
Air Force - 71

Project Number:
6610-F130

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:29Z
Check the source to verify that this is the current version before use.

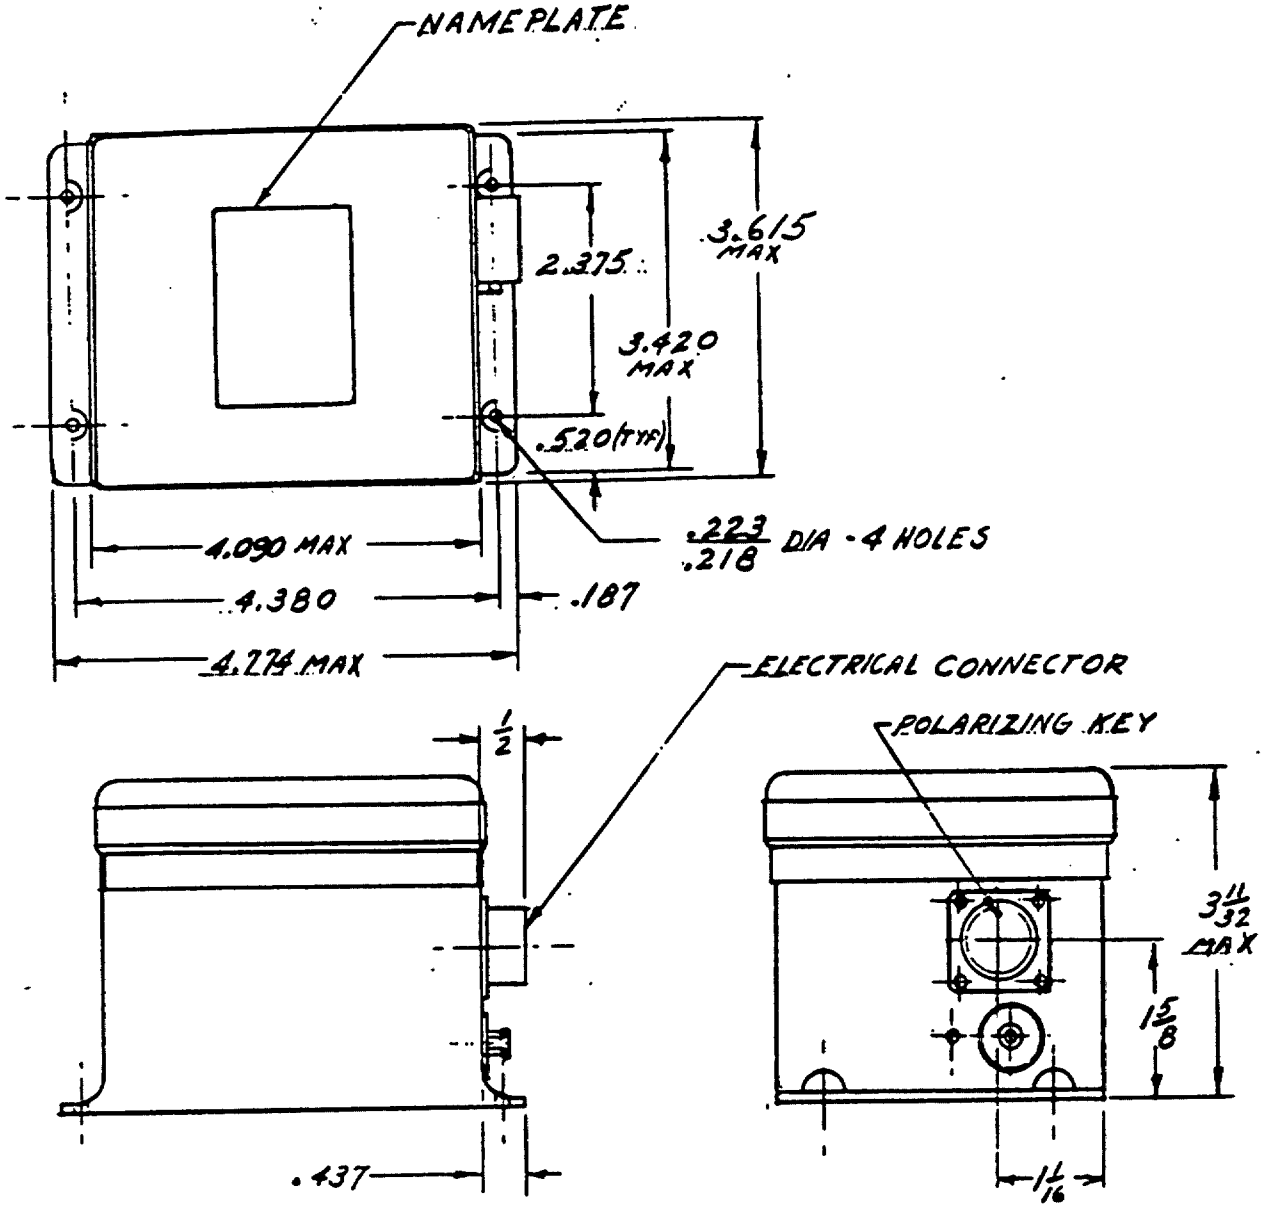

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED,
TOLERANCES - DECIMALS ±0.005
FRACTIONS ± 1/32

FIGURE 1. CASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:29Z
Check the source to verify that this is the current version before use.