INCH-POUND

MS27072E
24 September 2003
SUPERSEDING
MS27072C
30 June 1972

DETAIL SPECIFICATION SHEET

WIRE, RETAINER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL -27272.

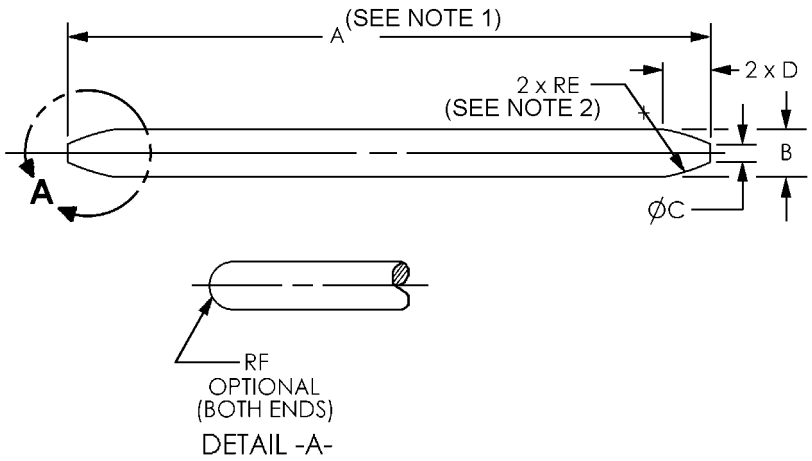

NOTES:
1. Wire shall be straight within .020 full indicator movement.
2. Radius shall be concentric to wire OD within .005 full indicator movement.

FIGURE 1. Wire, retainer illustration.

REQUIREMENTS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

Intended use. This part is a component of MS27062 through MS27068 and MS27387 through MS27390. This is a design standard for manufacturing purposes. The item is only procured as an integral part of adapter assemblies.

Identification of product. The Part of Identifying Number (PIN) for this part shall be as specified in table I (e.g., MS27072-4C).

Dimensions and tolerances. Dimensions are in inches. Unless otherwise specified, break or radius all corners .005, +.005, -.000.

Material. Corrosion-resistant steel, class 305 or 304, condition A in accordance with ASTM A580 or ASTM A313.

Finish. Passivate in accordance with SAE AMS-QQ-P-35. Dry-film lubricate with lubrication conforming to SAE AS1701 or MIL-PRF-46010.

Wire, retainer illustration. See figure 1.

Remover all burrs and slivers.

Surface roughness. Unless otherwise specified, maximum surface roughness shall not exceed 125 µin. R_a in accordance with ASME B46.1.

Order of precedence. This specification takes precedence over the documents referenced herein. Unless otherwise specified, referenced documents shall be of the issue in effect on the date of solicitation.

TABLE I. Wire, retainer requirements.

PIN MS27072	A 1/ ± .015	B		C ± .010	D ± .005	E 2/ +.010 - .005	F	
-4C	1.203	.072	+.000 - .005	.017	.065	.139	.026	
-5C	1.325	.080	+.000 -.004	.020	.073	.156	.030	± .005
-6C	1.545							
-8C	1.969	.095		.023	.087	.186	.037	
-10C	2.250							
-12C	2.625	.125		.031	.115	.246	.050	± .010
-16C	3.703							
-20C	4.500							
-24C	5.375							

1/ Wire shall be straight within .020 full indicator movement.

2/ Radius shall be concentric to wire OD within .005 full indicator movement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Review activities:
Army – AT, MI
Navy - MC, SA, SH
Air Force - 71

Preparing activity:
DLA - CC

(Project 4730-2260-000)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.